

bright solutions



**iNTEC**<sup>®</sup>  
LIGHT

bright solutions



**Quando la ricerca trova risposte  
alle esigenze, vecchie e nuove.  
Quando la tecnologia risolve problemi.  
Quando tecnica ed estetica  
si fondono armoniosamente.**

**Li, nascono le soluzioni più brillanti.**

When research finds solutions  
to needs, both old and new.  
When technology solves problems.  
When technology and aesthetic  
appeal harmoniously merge.  
That's when the bright solutions are born.



Milano



Napoli

# BRIGHT SOLUTIONS

IERI E OGGI, PRESENTI /  
YESTERDAY AND TODAY, PRESENT



In.tec light

## Un'evoluzione lunga oltre 100 anni

La nostra storia comincia a Napoli agli inizi del '900. È una storia di impegno, di evoluzione, di coraggio. Una storia che corre lungo il filo del tempo intrecciandosi costantemente con quella del vetro. Generazione dopo generazione, **FAN Europe Lighting** evolve, cambia forma, sviluppa la sua idea di prodotto e di servizio, con l'obiettivo di diventare un punto di riferimento per tutto il settore dell'illuminazione.

## La nostra azienda, oggi

Oggi **FAN Europe Lighting** è una grande squadra di persone e di risorse. Alla ricerca dell'eccellenza nella qualità dei prodotti, abbiamo un ecosistema di servizi e garanzie che abbiamo sviluppato e strutturato a misura di esigenza e di cliente. La nostra italian heritage non ci fa dimenticare l'importanza dell'originalità e della cura nel prodotto. La nostra voglia di crescere ci spinge ad essere sempre al passo con la luce di oggi e di domani, una luce sempre più smart, sempre più green, sempre in evoluzione.

Our history began in Naples in the early 1900s. It's a history of commitment, evolution and courage. A history that follows the thread of time, constantly intertwining with that of glass. Generation after generation, **FAN Europe Lighting** has evolved, changing shape, developing its concept of products and services to become a benchmark for the entire lighting industry.

Today, **FAN Europe Lighting** is a vast team of people and resources. In addition to pursuing excellence in product quality, we combine an ecosystem of services and guarantees, which we have developed and tailored to our customers' needs. Our Italian heritage does not allow us to forget the importance of originality and product care. Our desire to grow motivates us to always keep up with the lighting of today and tomorrow, lighting that is always smarter, more eco-friendly and evolving.

**An evolution  
spanning more  
than 100 years**

**Our  
company,  
today**



# CUSTOM-MADE LIGHTING

UNA SINERGIA DI  
RISORSE E GARANZIE /  
A SYNERGY OF RESOURCES  
AND GUARANTEES

**La qualità,  
al primo posto**

Componenti di qualità, controlli multipli, collaudi in fase di realizzazione: per la qualità non scendiamo mai a compromessi. Grazie a un team di esperti riusciamo a garantire la tecnologia più avanzata, finiture ogni anno più curate e nuovi design a prova di tempo!

**La gamma più  
completa  
di prodotti**

Siamo una delle poche aziende al mondo a coprire così tanti settori di destinazione: dall'illuminazione industriale al prodotto decorativo. Siamo "appassionati ricercatori" e ogni anno arricchiamo la gamma con collezioni di tendenza e le innovazioni più efficienti in materia di tecnologia e sostenibilità.

L'evoluzione stilistica e tecnologica dell'illuminazione ha indirizzato la ricerca illuminotecnica verso progetti di illuminazione su misura, in cui i corpi illuminanti sono strumenti al servizio del progetto architettonico.

Questa fase evolutiva ci ha spinto ad ampliare la nostra divisione Project ed Illuminotecnica dedicata ai progetti su misura. La divisione esegue già servizi di progettazione, realizzazione prototipi, test e controllo di produzione per ogni prodotto presente sul nostro catalogo.

Quando i prodotti non incontrano le esigenze del cliente, realizziamo prodotti "customizzati" su misura per le esigenze del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico. Grazie a strumenti informatici e software di calcolo fotometrico possiamo fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.



Quality components, multiple checks, testing during the manufacturing process: we never compromise on quality. With our team of experts, we can guarantee cutting-edge technology, new improved finishes every year and new designs that will stand the test of time!

**Quality  
comes first**

We are one of the few companies in the world to cover so many target sectors: from industrial lighting to decor products. As "passionate researchers" every year we enrich our range with trend-setting collections and the most efficient innovations in terms of technology and sustainability.

**The most  
comprehensive  
range of  
products**

The stylistic and technological evolution of lighting has steered lighting research towards custom-made lighting projects, in which luminaires are used to support architectural design.

This evolutionary phase encouraged us to expand our Project and Lighting department focusing on custom-made projects. The department already provides design, prototyping, testing and production monitoring services for all the products in our catalogue. When products don't meet the customer's needs, we make bespoke products to meet project requirements and fully enhance lighting design contexts. Using computer tools and photometric calculation software, we can provide photometric calculations for each new product thereby appropriately developing the lighting design project.



# CUSTOMER EXPERIENCE

UN'ASSISTENZA SEMPRE ATTIVA / ASSISTANCE ALWAYS AVAILABLE

**Massima disponibilità di prodotti**

Noi ci siamo, sempre! Con disponibilità, professionalità e un obiettivo chiaro: semplificare la vita dei nostri clienti. È una promessa che facciamo a chi non ci conosce. È una garanzia consolidata per chi lavora con noi da anni! Abbiamo a disposizione una delle più vaste gamme di articoli sul mercato ma riusciamo ad assicurare in ogni momento il 98% di disponibilità. Garantiamo che il restante 2% torni disponibile in 30 giorni!

**Spedizioni Veloci e sicure**

Abbiamo sviluppato negli anni un sistema logistico efficiente in grado di garantire consegne in 24h per l'Italia e 48 per l'Europa, assicurando la massima cura nel trasporto. Un team multilingua è inoltre al servizio dei clienti per offrire supporto e assistenza.



We are always here for you! With our helpfulness, professionalism and a clear goal: to make life easier for our customers. It's a promise we make to those who don't know us. It's an established guarantee for those who have worked with us for years! We have one of the widest ranges of items on the market, but we can guarantee 98% availability at all times. We guarantee that the remaining 2% will be available in 30 days!

**Maximum product availability**

Over the years, we have developed an efficient logistics system that guarantees deliveries within 24h in Italy and 48h in Europe, ensuring maximum care during transport. Our multilingual team also provides customers with support and assistance.

**Quick and safe shipments**



# REASON WHY

## SOSTENIAMO IL GREEN / WE ARE ECO-FRIENDLY

Abbiamo eliminato la plastica dai nostri packaging. Selezioniamo e prediligiamo materiali provenienti da risorse sostenibili. Ricerchiamo le tecnologie con miglior efficienza energetica abbinati a sistemi smart in grado di ridurre ulteriormente i consumi. Questi e molti altri sono i nostri impegni a sostegno della sostenibilità!

We no longer use plastic in our packaging. We select and prefer materials from sustainable resources. We research the most energy-efficient technologies combined with smart systems that further reduce consumption. All this, and much more, shows our commitment to sustainability!



# GUIDA ALLA LETTURA DELLE TABELLE / GUIDE TO READING THE TABLES

Ogni collezione è accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto  
Every collection will be distinguished by a symbol for intended use

Nome e caratteristiche collezione  
Collection name and characteristics



**Certificazione e normative**  
Certification and regulations

**Caratteristiche prodotto**  
Product characteristics

**Codice prodotto e codice ean**  
Product code and EAN code

**Variante colore**  
Colour variance  
ove esistente / where existing

**Potenza Power**  
Per i prodotti senza LED integrato, dati attacco lampadina con potenza massima certificata /  
For the products without built-in LED max lamp holder power as required by CE certificate

**Temperatura colore LED espressa in Kelvin + lumen**  
Colour temperature in Kelvin + lumen  
ove esistente / where existing

**Accessori**  
Accessories  
ove esistente / where existing

**Fotometria del prodotto**  
Photometric curve  
ove esistente / where existing



**indoor use**

uso domestico / domestic use



**outdoor use**

esterno / outdoor use



**accommodation areas use**

strutture ricettive / accommodation areas use



**office use**

uffici / office use



**commercial areas use**

aree commerciali / commercial areas



**urban areas use**

aree urbane / urban use



**industrial areas use**

aree industriali / industrial use



**bathroom use**

ambiente bagno / bathroom use

## APP INTEC GOOD SOLUTION FOR YOUR SMART LIFE!

EASY  
DOMOTICA

WI-FI  
SMART INTEC

SMART INTEC  
BLUETOOTH  
SIG MESH

Sistemi di controllo per i nostri prodotti SMART / Control system easy installation




Smart Intec WIFI



RF 2.4G control system



Alexa e Google Home voice control

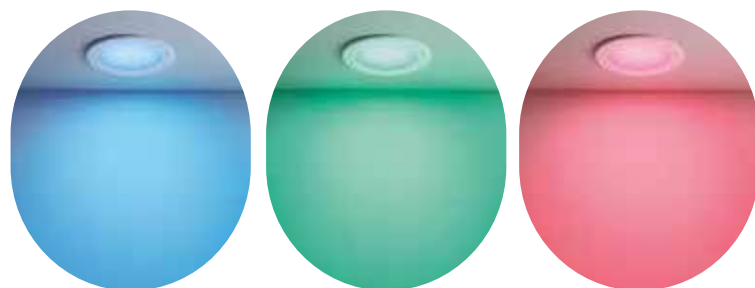

**EASY DOMOTICA** Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless. I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Bluetooth. Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

**EASY DOMOTICA** With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies. The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups low voltage products that can be connected with constant voltage power supply in parallel connection system and are characterized by extreme flexibility and modularity as they are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units. The control units can be controlled by wifi, bluetooth devices or can be controlled via a wall pad or remote control.



È possibile controllare da remoto tutti gli apparecchi luminosi, con le APP INTEC e SMART LIFE / All luminaires can be remotely controlled with INTEC and SMART LIFE APPs.

Scarica l'app Smart Intec su / Download App Smart Intec on:



In.tec light

**APP INTEC WI-FI** Ogni momento della vita quotidiana richiede la giusta luce. Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-fi e Bluetooth. Tramite la **nostra app Smart INTEC** è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene. Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step. Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

**APP INTEC WI-FI** Every moment of everyday life require the right light. Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection. **With our APP Smart Intec** it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions. To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection. Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App. The smart lamps can be controlled also with Wifi voice control devices.

**SMART INTEC Bluetooth Sig Mesh** La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligente più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo. La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google. Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornendo un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.






**SMART INTEC Bluetooth Sig Mesh** Bluetooth mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices. Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m. The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls. For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs. In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.













# CARATTERISTICHE PRODOTTO / PRODUCT FEATURES

 <b>LED SMD</b>	 <b>LED COB</b>	 <b>LED PERFORMANCE</b>	 <b>RGB</b>	 <b>RGB+UV</b>	 <b>RGBW+UV</b>	 <b>RAINBOW LIGHT</b>
LED integrato SMD / Built-in SMD LED	LED integrato COB / Built-in COB LED	Prodotto ad alta efficienza luminosa / High luminous efficiency product	Prodotto RGB / RGB product	Prodotto RGB+UV / RGB+UV product	Prodotto RGB+bianco+UV / RGB+white+UV product	Prodotto RAINBOW / RAINBOW product


 <b>E12</b>	 <b>E14</b>	 <b>E27</b>	 <b>G9</b>	 <b>GU10</b>	 <b>GX53</b>	 <b>LED T8</b>	 <b>MR16</b>	 <b>R7s</b>	 <b>H49</b>	 <b>H160</b>	 <b>H115</b>
Attacco sorgente / Light source									Misura lampadina consigliata / Recommended bulb size		





 <b>CCT</b>				 <b>3STEP</b>
Prodotto CCT (bianco dinamico) / Adjustable white	<b>Selectable color temperature (2700K 3000K 4000K)</b> Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin	<b>Selectable color temperature (3000K 4000K 6000K)</b> Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin	<b>Selectable color temperature (3000K 4000K)</b> Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin	<b>3 step CCT</b> Regolazione luce calda, naturale, fredda. Memory function tramite interruttore a parete / Warm, natural and cold light control. Memory function by means of a wall switch

 <b>Emergency light</b>	 <b>Solar energy product</b>	 <b>Walkable</b>	 <b>IN&amp;OUT</b>	 <b>Bluetooth connection</b>
		max 2000kg		

 <b>TOUCH DIMMER</b>	 <b>TRIAC</b>	 <b>3"</b>	 <b>3"</b>	 <b>3"</b>
<b>Touch dimmer</b> Intensità di luce regolabile / Dimmable light intensity	<b>Dimming</b> Intensità di luce regolabile a taglio di fase / Adjustable light intensity by phase cut-out dimmer	<b>3 step DIM</b> I prodotti 3 step dimmer permettono di regolare l'intensità luminosa utilizzando l'interruttore di casa / 3 step dimming function: modulation of light intensity by wall switch		

 <b>Gesso verniciabile / Gypsun paintable</b>	 <b>concrete finish</b>	 <b>Prodotto galleggiante / Floating product</b>	 <b>Prodotto anticorrosione / Corrosion-free</b>
---	---	--	--

 <b>SWITCH TOUCH</b>	 <b>TOUCH CONTROL</b>	 <b>CRI 90</b>	 <b>CRI &gt;80</b>
Interruttore touch integrato / Built-in touch switch		Indice resa cromatica / Colour rendering index	

 <b>Incassi: direzione fascio di luce / Recessed lamps: description of asymmetrical light emission type</b>	 <b>Plafoniere: direzione fascio di luce / Ceiling lamps: description of light emission type</b>	 <b>Applique: direzione fascio di luce / Wall lamps: description of light emission type</b>	 <b>Incassi e segnalpassi: direzione fascio di luce / Inground and walk lights: description of light emission type</b>
---	--	---	--

 <b>UGR &lt;16</b>	 <b>UGR &lt;19</b>
Prodotto UGR / Unified glare rating	

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclairage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30: più basso è il valore, minore è l'abbagliamento.**

UGR is an international unified data, developed by CIE (commission international de l'Enclairage) for the evaluation of the glazing degree of the light sources. The European norm for the lighting of te specifical working place **UNI-EN 12464-1** requires a value UGR for every application, included between **10 and 30: lower is the value, lower is the anti glare ratee.**

## GRADI DI PROTEZIONE / IP PROTECTION RATE



### Classe IP / IP Class

**Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono IP20.**

All items in the catalogue without IP rating specific are IP20.



#### Protezione da corpi solidi Protection against solid bodies

**0**  
Nessuna protezione /  
No protection

**1**  
Protetto contro corpi solidi di dimensioni superiori a 50 mm /  
Protected against solid bodies larger than 50 mm

**2**  
Protetto contro corpi solidi di dimensioni superiori a 12 mm /  
Protected against solid bodies larger than 12 mm

**3**  
Protetto contro corpi solidi di dimensioni superiori a 2,5 mm /  
Protected against solid bodies larger than 2,5 mm

**4**  
Protetto contro corpi solidi di dimensioni superiori a 1 mm /  
Protected against solid bodies larger than 1 mm

**5**  
Protetto dalla polvere senza deposito dannoso /  
Protected against dust no harmful deposit

**6**  
Completamente protetto dalla polvere /  
Completely protected against dust

#### Protezione da liquidi Protection against liquids

**0**  
Nessuna protezione /  
No protection

**1**  
Protetto contro le gocce d'acqua a caduta verticale /  
Protected against vertically-falling drops of water

**2**  
Protetto contro le gocce d'acqua che cadono fino a 15° dalla verticale /  
Protected against drops of water falling at up to 15° from the vertical

**3**  
Protetto contro le gocce d'acqua che cadono fino a 60° dalla verticale /  
Protected against drops of water falling at up to 60° from the vertical

**4**  
Protetto contro le gocce d'acqua da tutte le direzioni /  
Protected against projections of water from all directions

**5**  
Protetto da getti d'acqua da tutte le direzioni /  
Protected against jets of water from all directions

**6**  
Protetto da getti d'acqua con una forte forza d'impatto /  
Protected against jets of water of similar force heavy seas

**7**  
Protetto dagli effetti dell' immersione /  
Protected against the effects of immersion

**8**  
Protetto contro gli effetti prolungati dell'immersione sotto pressione /  
Protected against pro-longed the effects of immersion under pressure



### Classe IK / IK Class

**Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni.**

Degrees of protection for enclosures for electrical equipment against external mechanical impacts.

#### IK Energia d'impatto (in Joules) / Impact energy (in Joules)

**00** 0

**01** 0,15

**02** 0,2

**03** 0,35

**04** 0,5

**05** 0,7

**06** 1

**07** 2

**08** 5


**09** 10


**10** 20


### Classe isolamento elettrico / Appliance class

**Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.**

The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

**I**  Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato /  
These appliance must have their chassis connected to electrical earth by a separate earth conductor

**II**  Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra /  
These appliance are designed in such a way that it does not require a safety connection to electrical earth

**III**  Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata di sicurezza /  
These appliance are designed to be supplied from a separated/safety extra-low voltage power source

## LEGENDA SIMBOLI / LEGEND OF SYMBOLS

### Certificazione e normative / Certification and regulations


 Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea /  
All our products comply with CE norms and current European standards


 EMC - Direttiva Europea sulla compatibilità elettromagnetica /  
EMC - European electromagnetic compatibility directive


 Prodotto dimmerabile /  
Product dimmable


 Prodotto non dimmerabile /  
Product not dimmable

 DALI - Digital Addressable Lighting Interface Sistema di controllo domotico della luce /  
DALI - Digital Addressable Lighting Interface Domatic lightigh control system

 Dimensione foro quadrato per incasso a soffitto /  
Square cut-out size for ceiling recessed lamps

 Dimensione foro rotondo per incasso a soffitto /  
Round cut-out size for ceiling recessed lamps

 Dimensione foro quadrato per incasso a parete /  
Square cut-out size for wall recessed lamps

 Dimensione foro rotondo per incasso a parete /  
Round cut-out size for wall recessed lamps

---

**Indoor:**

- 034** SISTEMA BINARI /  
TRACK LIGHTS
- 126** INCASSI /  
RECESSED LAMPS
- 224** SISTEMI D'ILLUMINAZIONE  
MULTIFUNZIONE /  
MULTI-FUNCTION  
LIGHTING SYSTEM
- 260** APPLIQUE E PLAFONIERE /  
WALL LAMP AND CEILING LAMPS
- 286** VENTILATORI /  
FANS
- 314** SOTTOPENSILI E BARRE LED /  
CABINETS AND LEDBARS
- 336** PROFILI E STRIP LED /  
PROFILES AND STRIP LED

---

**Emergency:**

- 436** LAMPADE D'EMERGENZA /  
EMERGENCY LAMPS

---

**Outdoor:**

- 446** APPLIQUE /  
WALL LAMPS
- 528** PLAFONIERE /  
CEILING LAMPS
- 566** APPLIQUE, SOSPENSIONI  
E PALETTI CORRELATI /  
WALL, SUSPENSION AND  
FLOOR LAMPS COMBINED
- 662** LAMPADE DA TAVOLO  
RICARICABILI /  
RECHARGEABLE  
TABLE LAMPS
- 684** INCASSI E SEGNAPASSI /  
INGROUND AND WALK LIGHTS
- 720** SOLARI /  
SOLAR LAMPS
- 740** PROIETTORI /  
FLOOD LIGHTS
- 770** STRADALI /  
STREET LIGHTS

---

**Industrial:**

- 786** HIGH BAY & TRI-PROOF

---

**Decorative:**


- 798** EASY DOMOTIC 24V /
- 812** LUCI DECORATIVE  
TECNICHE DMX /  
DMX TECHNICAL  
DECORATION LIGHTING

---

**Accessories:**

- 840** COMPONENTISTICA /  
LIGHTING COMPONENTS

**Indoor:**  
SISTEMA BINARI /  
TRACK LIGHTS

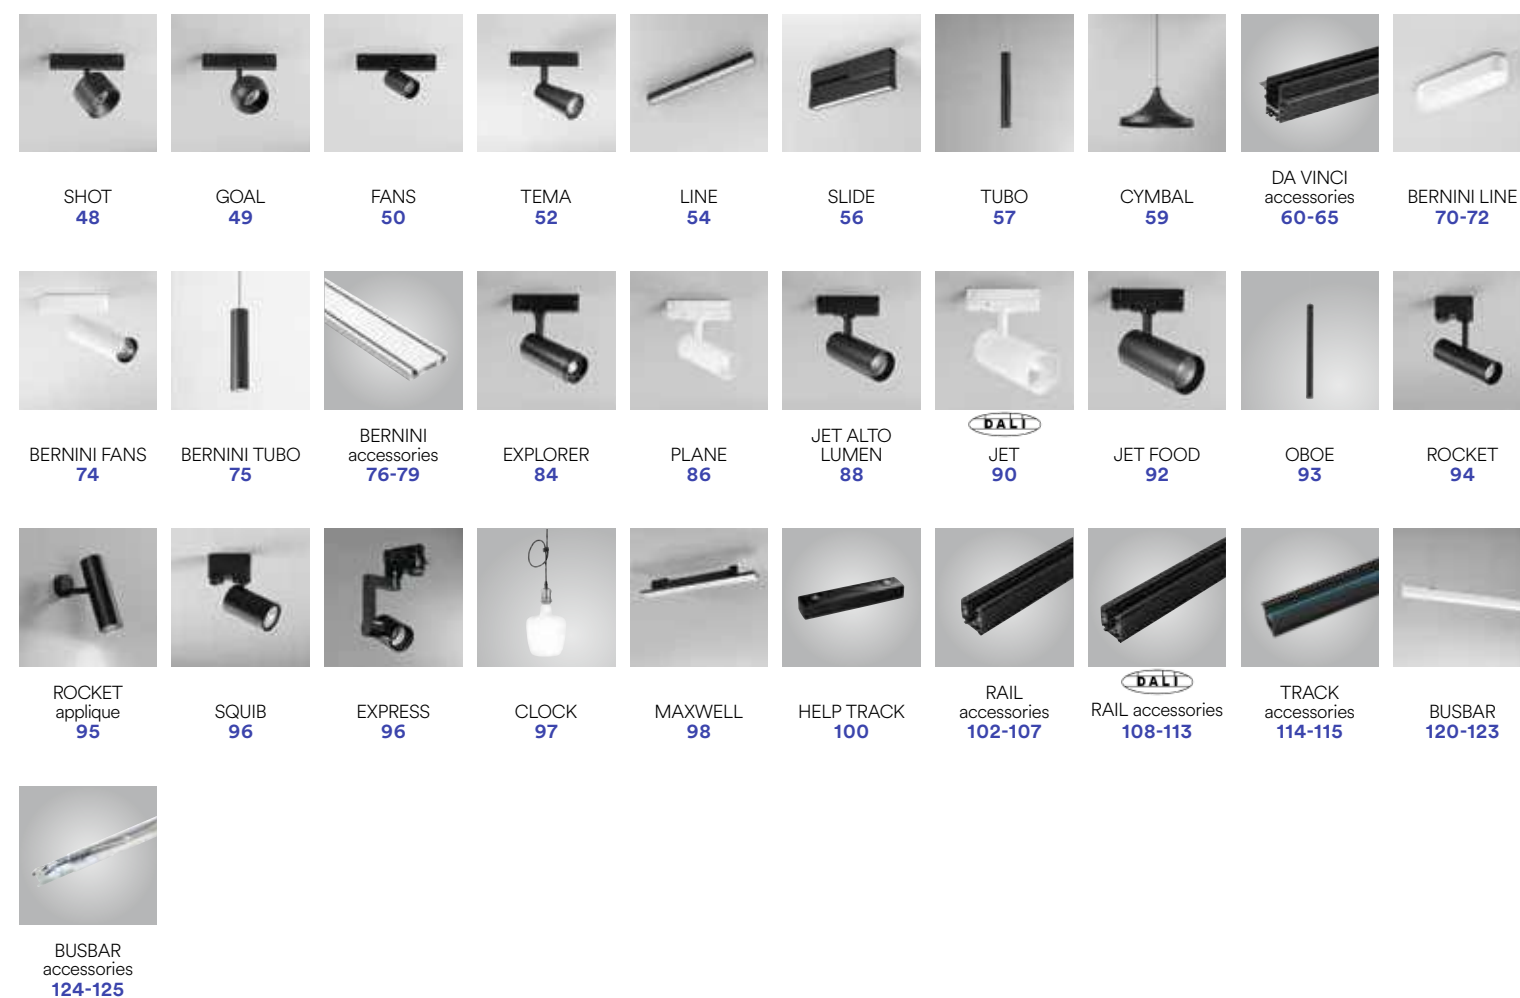

**Indoor:**  
INCASSI /  
RECESSED LAMPS




**Indoor:**  
SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE /  
MULTI-FUNCTION LIGHTING SYSTEM



**Indoor:**  
VENTILATORI /  
FANS




**Indoor:**  
APPLIQUE E PLAFONIERE /  
WALL LAMPS AND CEILING LAMPS

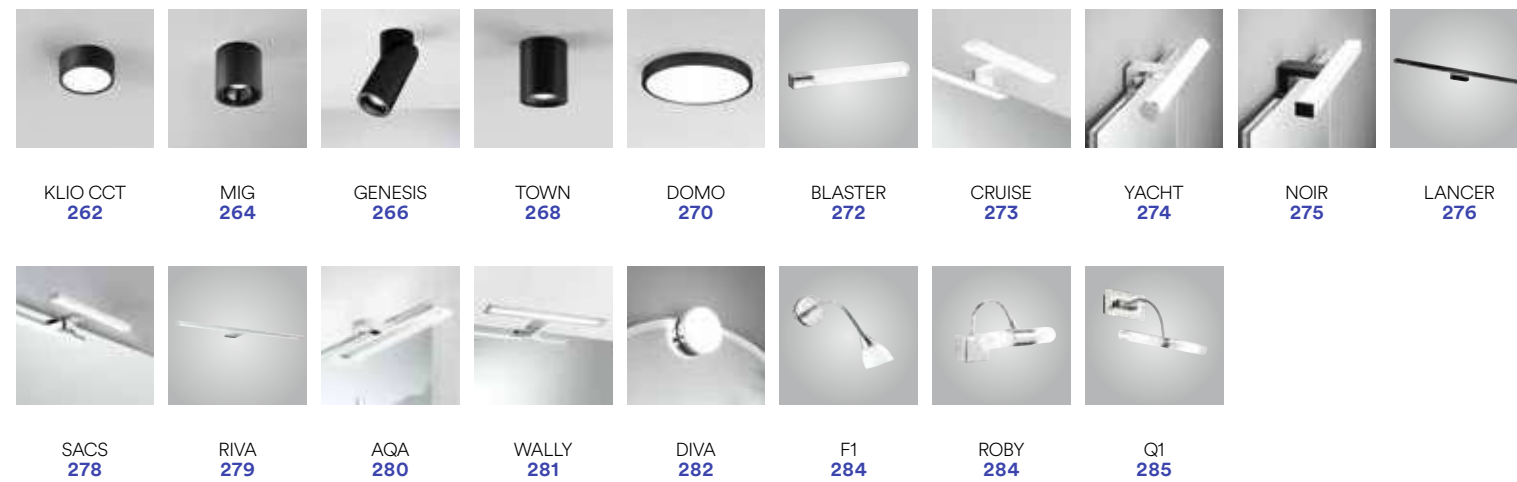

**Indoor:**  
SOTTOPENSILI E BARRE LED /  
CABINETS AND LEDBARS



**Indoor:**  
PROFILI E STRIP LED /  
PROFILES AND STRIP LED

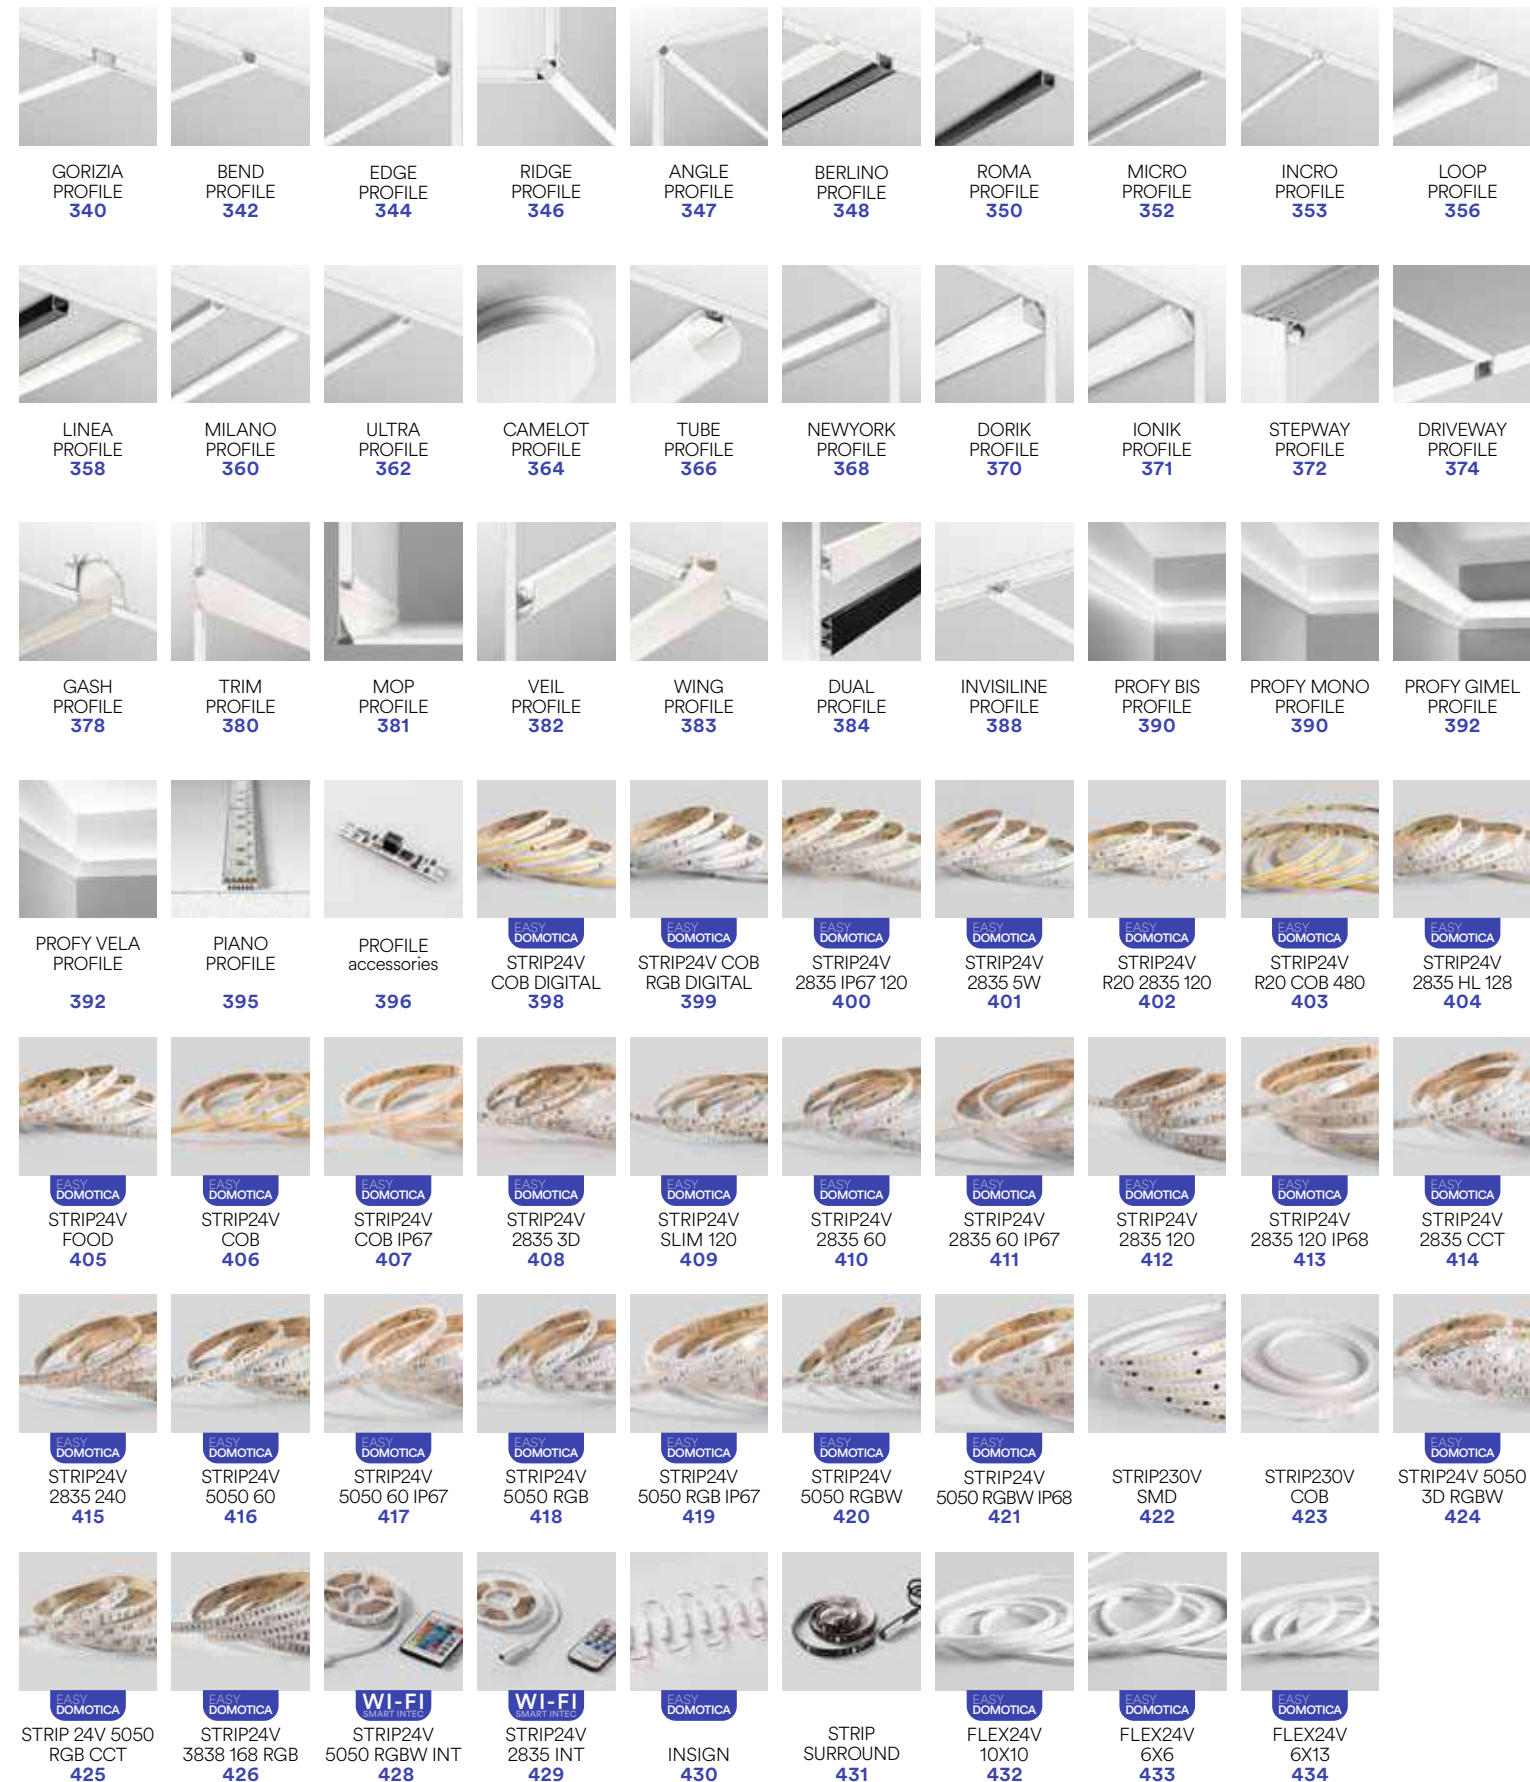

**Indoor:**  
LAMPAD E D'EMERGENZA /  
EMERGENCY LAMPS




**Outdoor:**  
APPLIQUE /  
WALL LAMPS



**Outdoor:**  
PLAFONIERE /  
CEILING LAMPS




**Outdoor:**  
APPLIQUE SOSPENSIONI E PALETTI CORRELATI /  
WALL SUSPENSION AND FLOOR LAMPS COMBINED

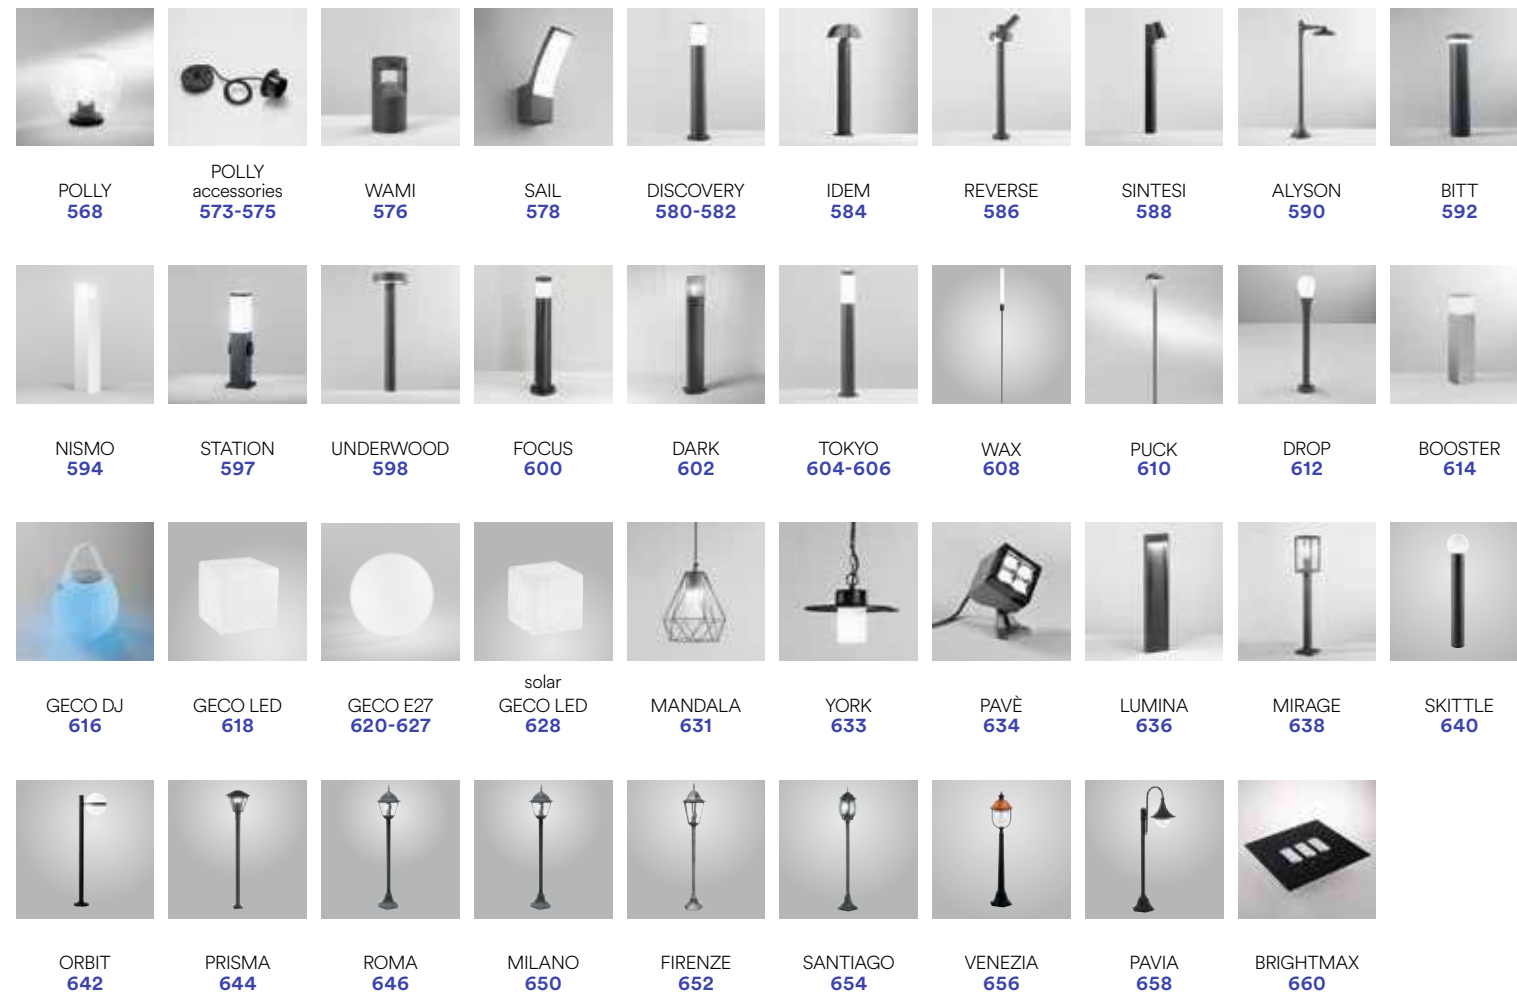


**Outdoor:**  
LAMPADIE DA TAVOLO RICARICABILI /  
RECHARGEABLE TABLE LAMP



**Outdoor:**  
INCASSI E SEGNAPASSI /  
INGROUND AND WALK LIGHTS

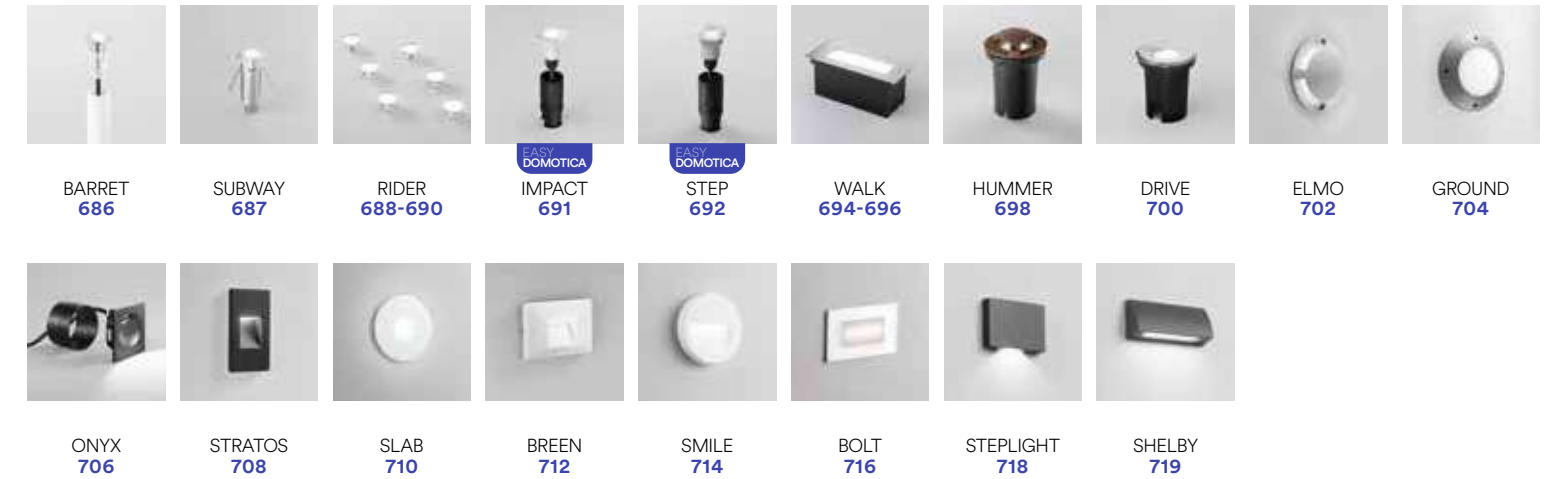

**Outdoor:**  
SOLARI /  
SOLAR LAMPS

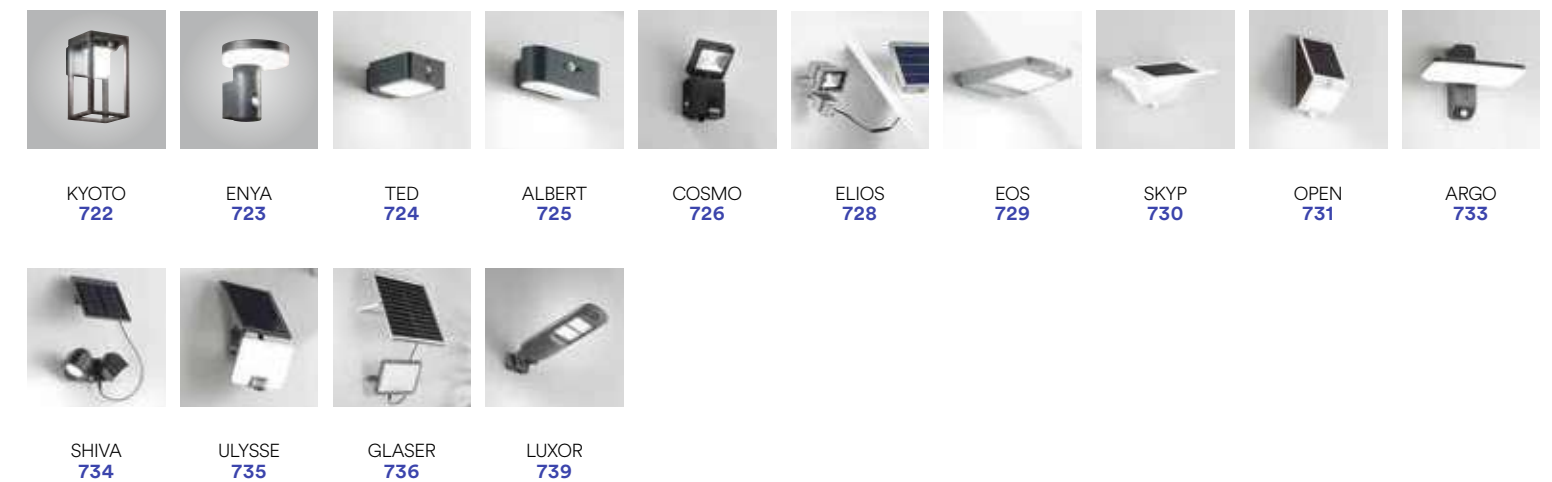

**Outdoor:**  
PROIETTORI /  
FLOOD LIGHTS




**Outdoor:**  
STRADALI /  
STREET LIGHTS



**Outdoor:**  
HIGH BAY & TRI-PROOF





**Decorative:**  
EASY DOMOTIC 24V

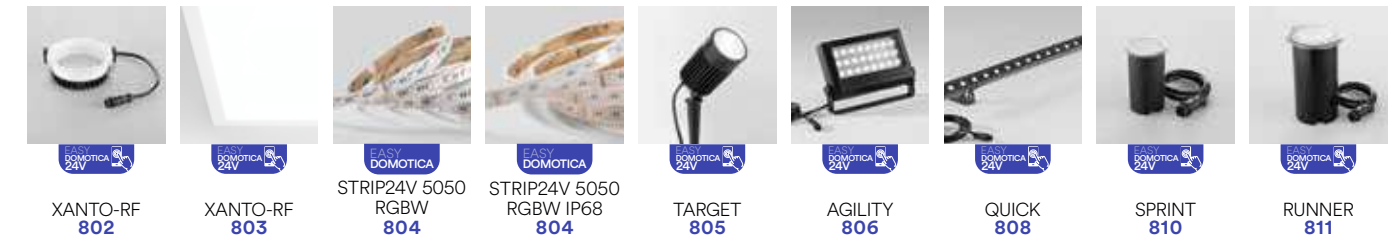

**Decorative:**  
LUCI DECORATIVE TECNICHE DMX /  
DMX TECHNICAL DECORATION LIGHTING



**Outdoor:**  
COMPONENTISTICA /  
LIGHTING COMPONENTS

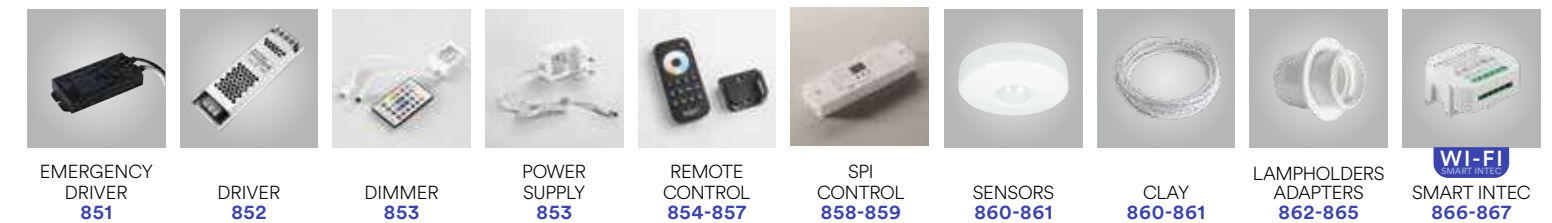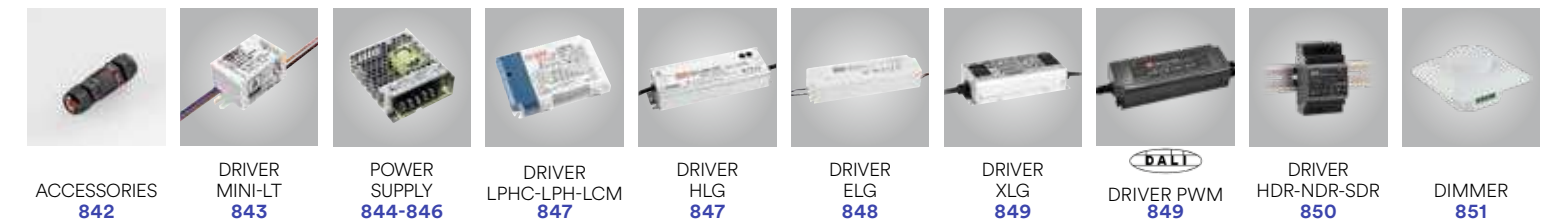



# INDICE ALFABETICO / ALPHABETICAL INDEX

articolo / article pagina / page

AGERA	482
AGILITY Easy Domotica 24V	806
AKRON	523
ALBATROS	292
ALBERT	725
ALFA	494-497
ALISEO	305
ALWAYS	538
ALYSON	590
ANGLE PROFILE	347
ANIMA	214
APOLLO	128-131
AQA	280
ARGO	733
ARIEL	212
ARTIC	794
ASSO	146
ASSO KIT 3	144
ATHOS	758
ATLANTA	519
ATLANTIC	790
AUREUS	772
AURIKA	332
AUSTER	298
AUSTIN	516
AVATAR	788
AXEL	748-751
AXEL PORTABLE	753
AXEL SENSOR	752
AYRIS	220
BANNER	744
BARRET	686
BATTEN	322
BEETLE	488
BEND PROFILE	342
BERLINO PROFILE	348
BERNINI FANS	74

articolo / article pagina / page

BERNINI LINE	70-73
BERNINI PROJECT 48V	66-69
BERNINI PROJECT 48V Accessories	76-79
BERNINI TUBO	75
BIOME	458
BITT	592
BLAM	333
BLASTER	272
BLITZ	180
BLYTH	290
BOLT	716
BOLT HELP	445
BOOSTER	614
BORDER	476
BOREA	303
BOSTON	518
BOXTER	484
BREEN	712
BRICK	208
BRIGHTMAX	660
BRIO	674
BULL	754
BUSBAR	120-123
BUSBAR Accessories	124
BUSBAR Trunking System	116-119
CAMELOT PROFILE	364
CAPRI	537
CITIZEN	532
CLAY	860
CLIMAX	680
CLOCK	97
CLOSET	334
COCKTAIL	678
COMPACT	448
CONTROLLER	836-839

articolo / article pagina / page

COSMO	726
CROWN	831
CRUISE	273
CYMBAL	59
DA VINCI PROJECT 48V	36-43
DA VINCI PROJECT 48V Accessories	60-65
DAMA	139
DARK	602
DELTA	498
DELTA INC	136
DENVER	519
DESERT	470
DETROIT	449
DIMMER	851-853
DISCOVERY	580-583
DIVA	282
DOMO	270
DORIK PROFILE	370
DOT	148
DRINK	670
DRIVE	700
DRIVER	843
DRIVER	847-851
DRIVEWAY PROFILE	374
DROP	612
DUAL PROFILE	384
DUKROT	472
EDGE PROFILE	344
ELIOS	728
ELITE	154
ELMO	702
ENERGY	768
ENTITY	197
ENYA	723
EOS	729
ESPERO	313
ETESIA	310

articolo / article pagina / page

EVA	209
EVER	548-553
EXPLORER	84
EXPRESS	96
EXTRA	542
F1	284
FANS	50
FEBO	776
FIBRA OTTICA	140
FIRENZE	652
FLAP CCT	168
FLEX24V 10X10	432
FLEX24V 6X13	434
FLEX24V 6X6	433
FLIPPY	554
FLOOD LIGHTS Accessories	762
FOCUS	600
FOEHN	305
FUSION	178
GAETA	521
GAMMA	455
GASH PROFILE	378
GECO DJ	616
GECO E27	620-627
GECO LED	618
GECO LED SOLAR	629
GENESIS	266
GHOST	195
GIOVE	764
GLASER	736
GLOW	175
GOAL	49
GOBLET	198
GOLF	460
GORIZIA PROFILE	340
GRECALE	306
GRIS	480

articolo / article pagina / page

GROUND	704
GRUBB	522
GTO	332
HABILIS	324
HADLEY	296
HELP 503	444
HELP 511	443
HELP EXIT	442
HELP INC	440
HELP TRACK	100
HELP TRACK	441
HERON	288
HIGHWAY	782
HIVE	203
HORUS	186
HUB	864
HUBLOT HELP	438
HUBLOT SENS	539
HUMMER	698
HURACAN	514
HYDE	150
IDEM	584
IMPACT	691
INCRO PROFILE	353
INSIGN	430
INVISILINE PROFILE	388
IONIK PROFILE	371
IPERION	778
IRIDE	826-829
ISCHIA	536
JAMMIN	672
JET	90
JET ALTO LUMEN	88
JET FOOD	92
JUMP	506
KLEIN	486
KLIO CCT	262
KNOX	756

articolo / article pagina / page

KYOTO	722
LAMP HOLDERS	862-865
LANCER	276
LASER	492
LEVANTE	309
LIBERTY	667
LINE	54
LINEA PROFILE	358
LOOP PROFILE	356
LUMINA	636
LUXON	478
LUXOR	739
LYBRA	138
MACK	162
MAGNUS	294
MANDALA	631
MASTER	766
MATRIX	188-191
MAXWELL	98
METRO	242
MICRO PROFILE	352
MIG	264
MILANO	650
MILANO PROFILE	360
MINI	202
MIRAGE	638
MIURA	454
MONDRIAN	520
MOP PROFILE	381
MORGANA	206
MOVIE	328
MYKES	676
NASHI	313
NAUTILUS	792
NEMO	181
NEPTUNE	830
NEWYORK PROFILE	368
NEXT	232-237

articolo / article pagina / page

NISMO	594
NOIR	275
OAKLAND	505
OBERON	683
OBOE	93
OCEAN	796
ONE	508
ONYX	706
OPEN	731
ORBIT	642
ORIONE	177
OUTSIDER	132-135
PANEL Accessories	256
PANEL Easy Domotica 24V	803
PANEL BIS	254
PANEL BK	248
PANEL BK CCT	246
PANEL FR / EDG	252
PANEL IP65	250
PANEL PRO	244
PANEL RGB	250
PANEL SM	253
PANEL-DJ	258
PAR56	834
PARKER	500-503
PARTY	664
PAVĚ	634
PAVIA	658
PEG	524
PEG	524
PELPS	835
PHANTOM	200
PIANO PROFILE	395
PICNIC	562
PICNIC COLOR	560
PICNIC INT	565

articolo / article pagina / page

PICNIC RGB	564
PLANE	86
PLUS	172
POLARIS	176
POLIS	784
POLLY	568-575
POLO	462
PONENTE	311
PORTLAND	504
POWER SUPPLY	844-846 853
PRISMA	644
PROFILE Accessories	394
PROFILE Accessories	396-397
PROFY BIS PROFILE	390
PROFY GIMEL PROFILE	392
PROFY MONO PROFILE	390
PROFY VELA PROFILE	392
PUCK	610
Q1	285
QUANTUM	184
QUARK	156
QUBO	510
QUICK Easy Domotica 24V	808
RADIUS	774
RAIL Accessories	102-107
RAIL DALI Accessories	108-113
RAINBOW	182
RAY	464
RAYS	822
REFLEX	222
REMOTE CONTROL	854-857
REVERSE	586

articolo / article pagina / page

RIBBON	490
RIDER	688-690
RIDGE PROFILE	346
RIVA	279
ROBY	284
ROCKET	94-95
ROMA	646
ROMA PROFILE	350
RUNNER Easy Domotica 24V	811
SACS	278
SAIL	578
SANTIAGO	654
SAT	746
SCIROCCO	309
SEATTLE	515
SEGMENTO	238-241
SENSITIVE	540
SENSO	207
SENSOR	860-861
SHADOW	199
SHAPE	226-231
SHELBY	719
SHELF	335
SHELLY	544-547
SHIVA	734
SHOT	48
SHOW PAR	816
SHOW Q	818
SHOW TUBE	820
SHOW WALLWASHER	814
SINKRO	152
SINTESI	588
SKILIFT	210
SKITTLE	640
SKYP	730
SKYRON	303
SLAB	710

articolo / article pagina / page

SLIDE	56
SLIM CCT	166
SMALL DRINK	668
SMART INTEC	866
SMILE	714
SNIPER	174
SNOW	205
SPEEDY	556
SPECTRO	201
SPI CONTROLLER	858-859
SPIRIT	204
SPRINT Easy Domotica 24V	810
SQUIB	96
STARLIGHT	142
STARLIGHT30	142
STARRY	194
STATION	597
STEALTH	452
STENOS	216
STEP	692
STEPLIGHT	718
STEPWAY PROFILE	372
STORM	300
STRATOS	708
STREETWAY	780
STRIP Easy Domotica 24V	804
STRIP SURROUND	431
STRIP230V COB	423
STRIP230V SMD	422
STRIP24V 2835 120	412
STRIP24V 2835 120 IP68	413
STRIP24V 2835 240	415
STRIP24V 2835 3D	408
STRIP24V 2835 5W	401
STRIP24V 2835 60	410
STRIP24V 2835 60 IP67	411


articolo / article pagina / page

STRIP24V 2835 CCT	414
STRIP24V 2835 HL 128	404
STRIP24V 2835 INT	429
STRIP24V 2835IP67 120	400
STRIP24V 3838 168 RGB	426
STRIP24V 5050 3D RGBW	424
STRIP24V 5050 60	416
STRIP24V 5050 60 IP67	417
STRIP24V 5050 RGB	418
STRIP24V 5050 RGB CCT	425
STRIP24V 5050 RGB IP67	419
STRIP24V 5050 RGBW	420
STRIP24V 5050 RGBW INT	428
STRIP24V 5050 RGBW IP68	421
STRIP24V COB	406
STRIP24V COB DIGITAL	398
STRIP24V COB IP67	407
STRIP24V COB RGB DIGITAL	399
STRIP24V FOOD	405
STRIP24V R20 2835 120	402
STRIP24V R20 COB 480	403
STRIP24V SLIM 120	409
SUBWAY	687
T5	326
T8	320
TARGET Easy Domotica 24V	805
TAURUS	760
TED	724
TEMA	52
TOGO	526
TOKYO	604-607
TOTAL	170
TOWER	534
TOWN	268
TRACK Accessories	114

articolo / article pagina / page

TRACK RAIL Three-phase	80-83
TREVIS	832
TRIGGER	334
TRIM PROFILE	380
TRON	164
TUBE PROFILE	366
TUBEX	192
TUBO	57
TUCSON	512
TURTLE	558
TWIN	466-469
ULTRA PROFILE	362
ULYSSE	735
UNDERWOOD	598
UNIX	316-319
VEIL PROFILE	382
VENEZIA	656
VEYRON	456
VIPER	218
VULKAN	196
VYSOR	742
WALK	694-697
WALLWASHER	824
WALLY	281
WAMI	576
WAX	608
WEISS	474
WING PROFILE	383
XANTO	158-161
XANTO-RF Easy Domotica 24V	802
YACHT	274
YORK	633
ZAK	330
ZENIT	183
ZODIAC	450
ZOOM	530

# INDOOR

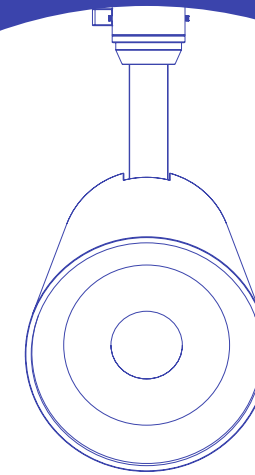

SISTEMA BINARI  
TRACK LIGHTS

DA VINCI  
PROJECT  
**48V**



# DA VINCI PROJECT 48V


INTEC fa un salto nel futuro con il sistema Da Vinci, sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.

Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi.

INTEC leap forward into the future with the Da Vinci system, system designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, position which can be modified with maximum versatility at any time thanks to the simple insertion of the led luminous bodies inside the track by means of the fluid ball bearings.


**A**  
**RECESSED  
TRACK TRIMLESS**  
Sistema di montaggio  
a incasso a filo /  
Recess mount  
system trimless




**B**  
**RECESSED  
TRACK**  
Sistema di montaggio  
a incasso con cornice /  
Recess mount system  
with external trim



**C**  
**SURFACE  
MOUNTED**  
Sistema di montaggio  
a plafoniera o  
a sospensione a vista /  
Ceiling or suspension  
mounting system



**D**  
**PENDANT**  
Sistema di montaggio a  
sospensione biemissione /  
Biemission suspension  
mounting system



# DA VINCI PROJECT 48V



In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click. Il sistema Da Vinci a sfere volenti è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici. Ogni corpo illuminante Da Vinci ha solo bisogno di essere posizionato, inserito ed acceso.

Depending on the space to be illuminated, it is possible to add, remove or orient the appliances when and where necessary thanks to a simple click. The Da Vinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Da Vinci luminaire just needs to be positioned, inserted and switched on.

All'interno del binario Da Vinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o mobili.

Inside the track Da Vinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with led linear lamps fixed or movable.

**A**  
LINE

Lampada lineare orientabile a led / Led adjustable linear lamp

**B**  
SLIDE

Lampada lineare orientabile a led / Led adjustable linear lamp

**C**  
GOAL

Faro luce spot orientabile / Spot orientable track light

**D**  
SHOT

Faro luce spot orientabile / Spot orientable track light

**E**  
FANS

Faro luce spot orientabile / Spot orientable track light

**F**  
TEMA

Faro luce spot orientabile / Spot orientable track light

**G**  
CYMBAL

Lampada sospensione led / Suspension led light

**H**  
TUBO


Lampada sospensione led / Suspension led light




# DA VINCI PROJECT 48V


Il binario Da Vinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a led inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso.  
La diversificata gamma di corpi illuminanti Da Vinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

Da Vinci track is a fully electrified low voltage track system and it is completed with led light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path.  
The diversified range of lighting fixtures Da Vinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.

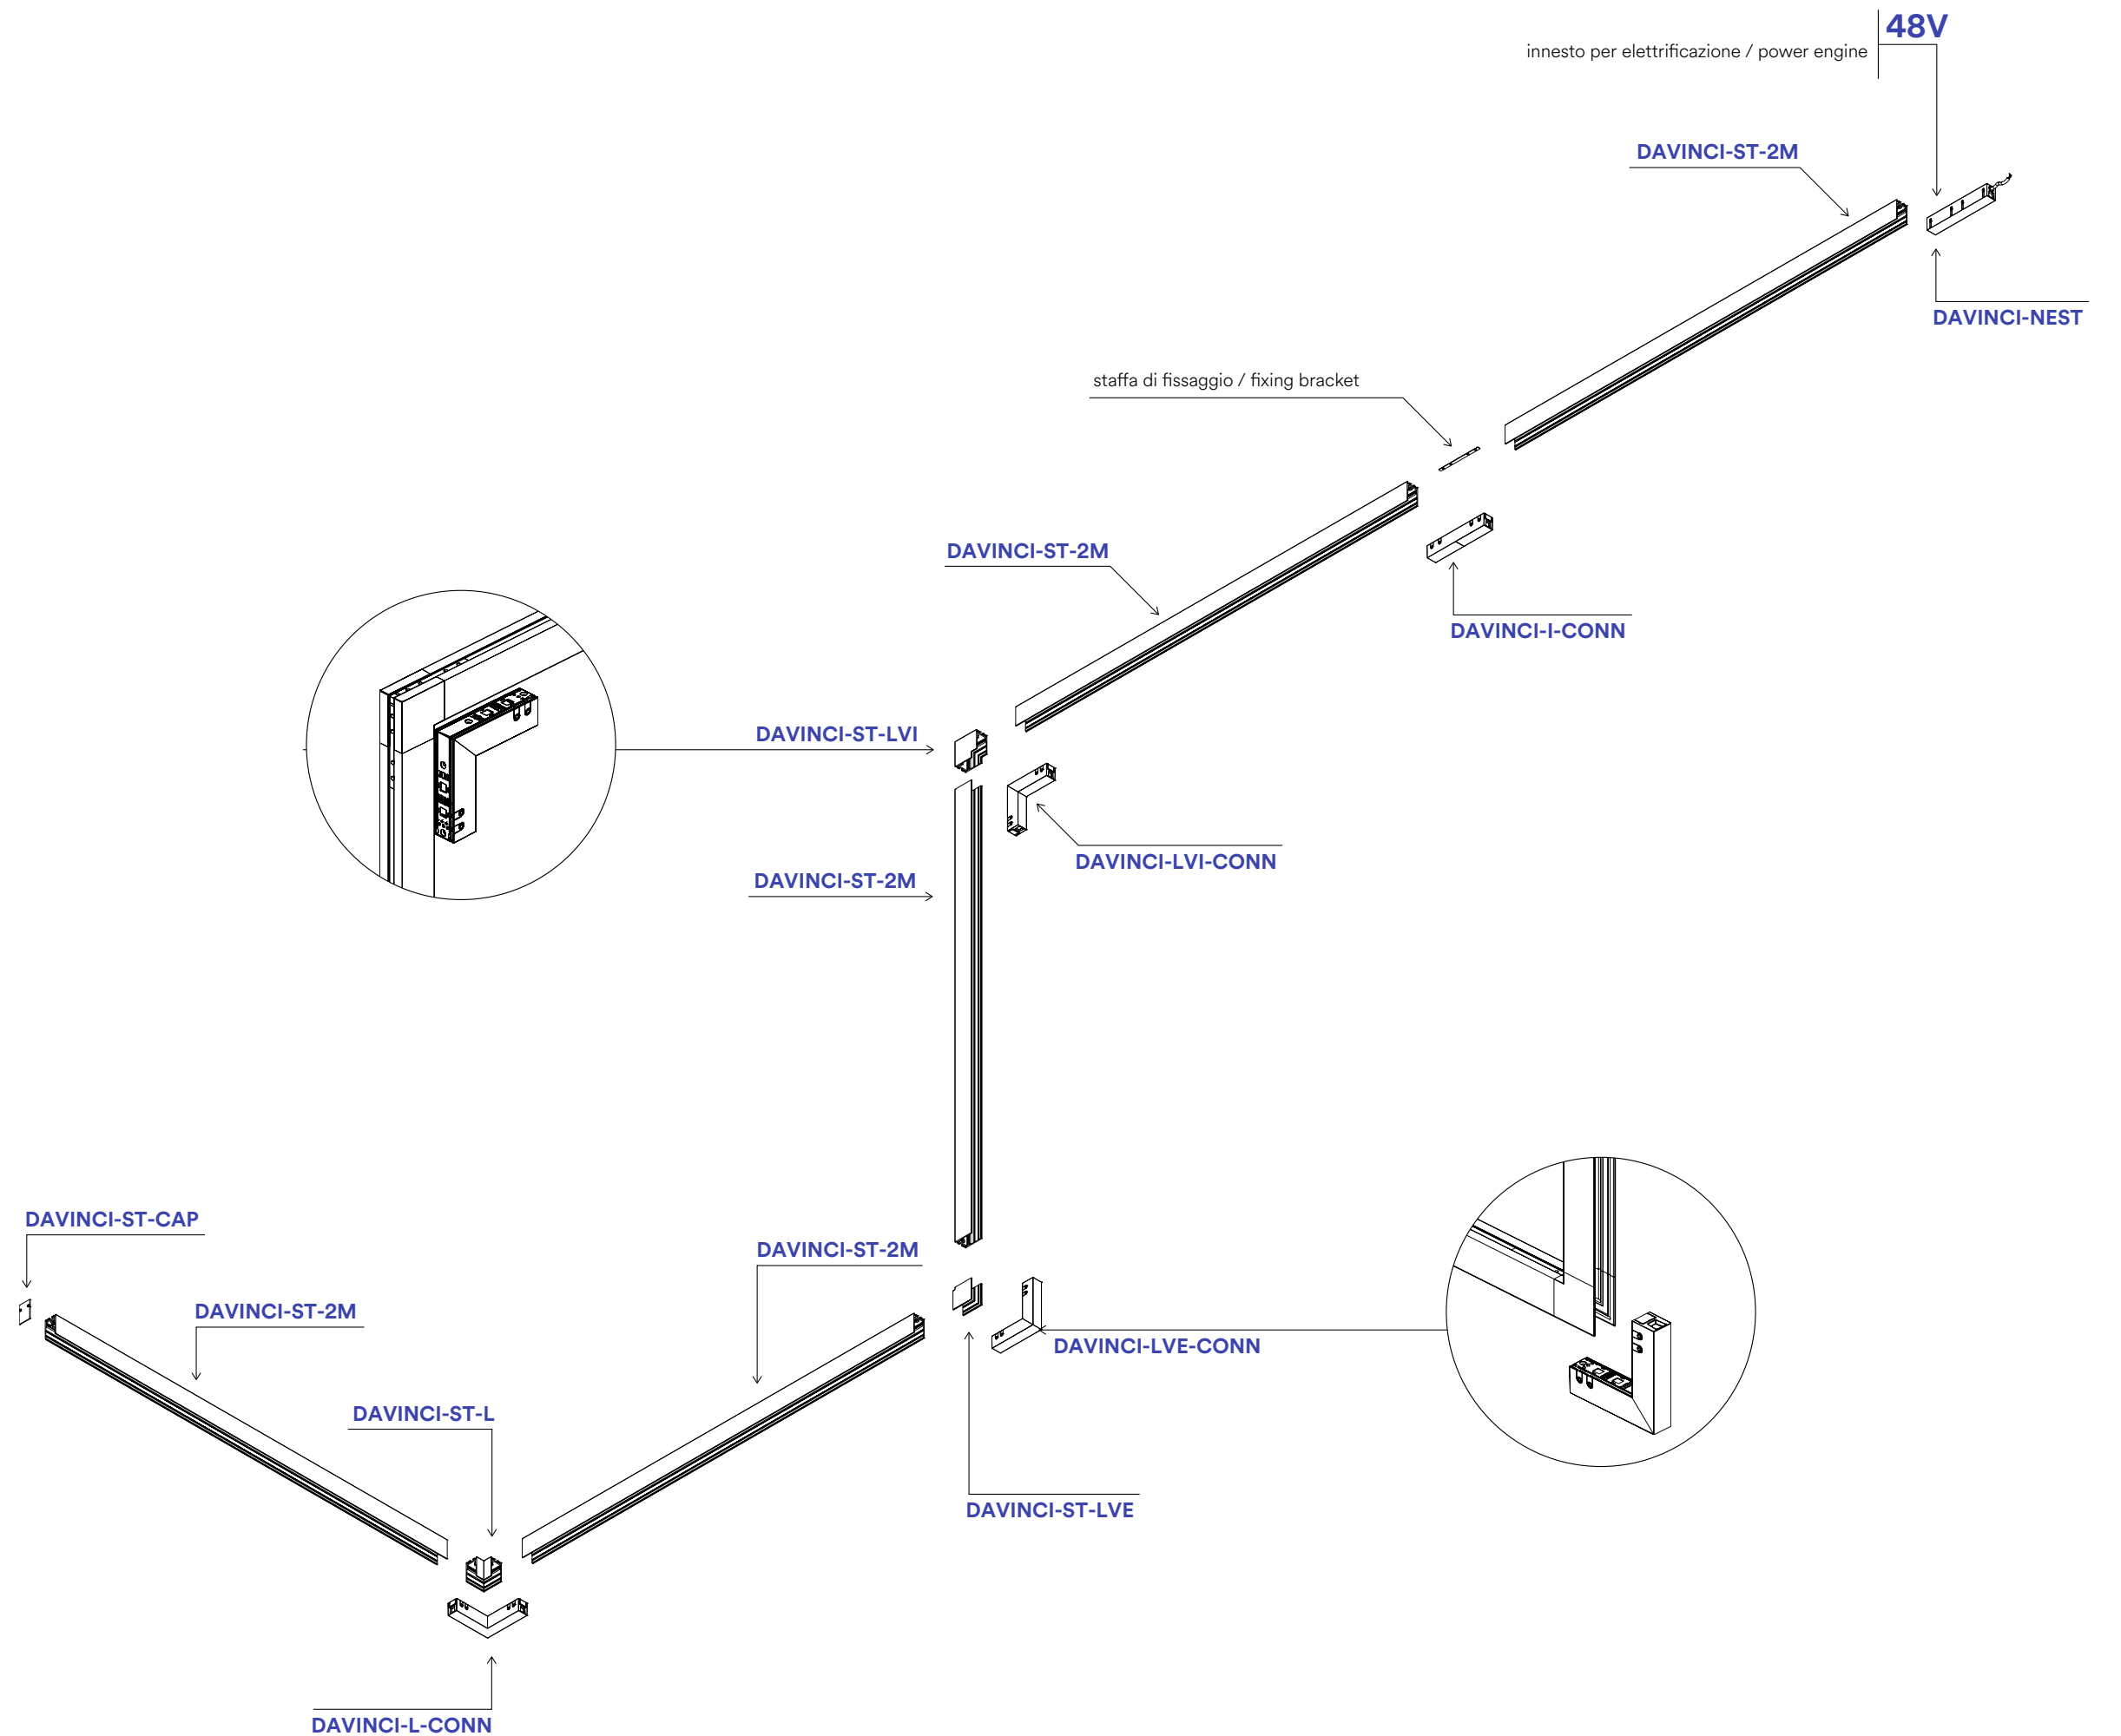




on photo:  
**TUBO / FANS**  
Recess mount system trimless



on photo:  
**CYMBAL / TEMA**  
Recess mount system with external trim



on photo:  
**CYMBAL / GOAL**  
Ceiling or suspension mounting system






on photo:  
**LINE UGR / LINE / TEMA**  
Ceiling or suspension mounting system




on photo:  
**SHOT / LINE URG / LINE / SLIDE**  
Biemission suspension mounting system

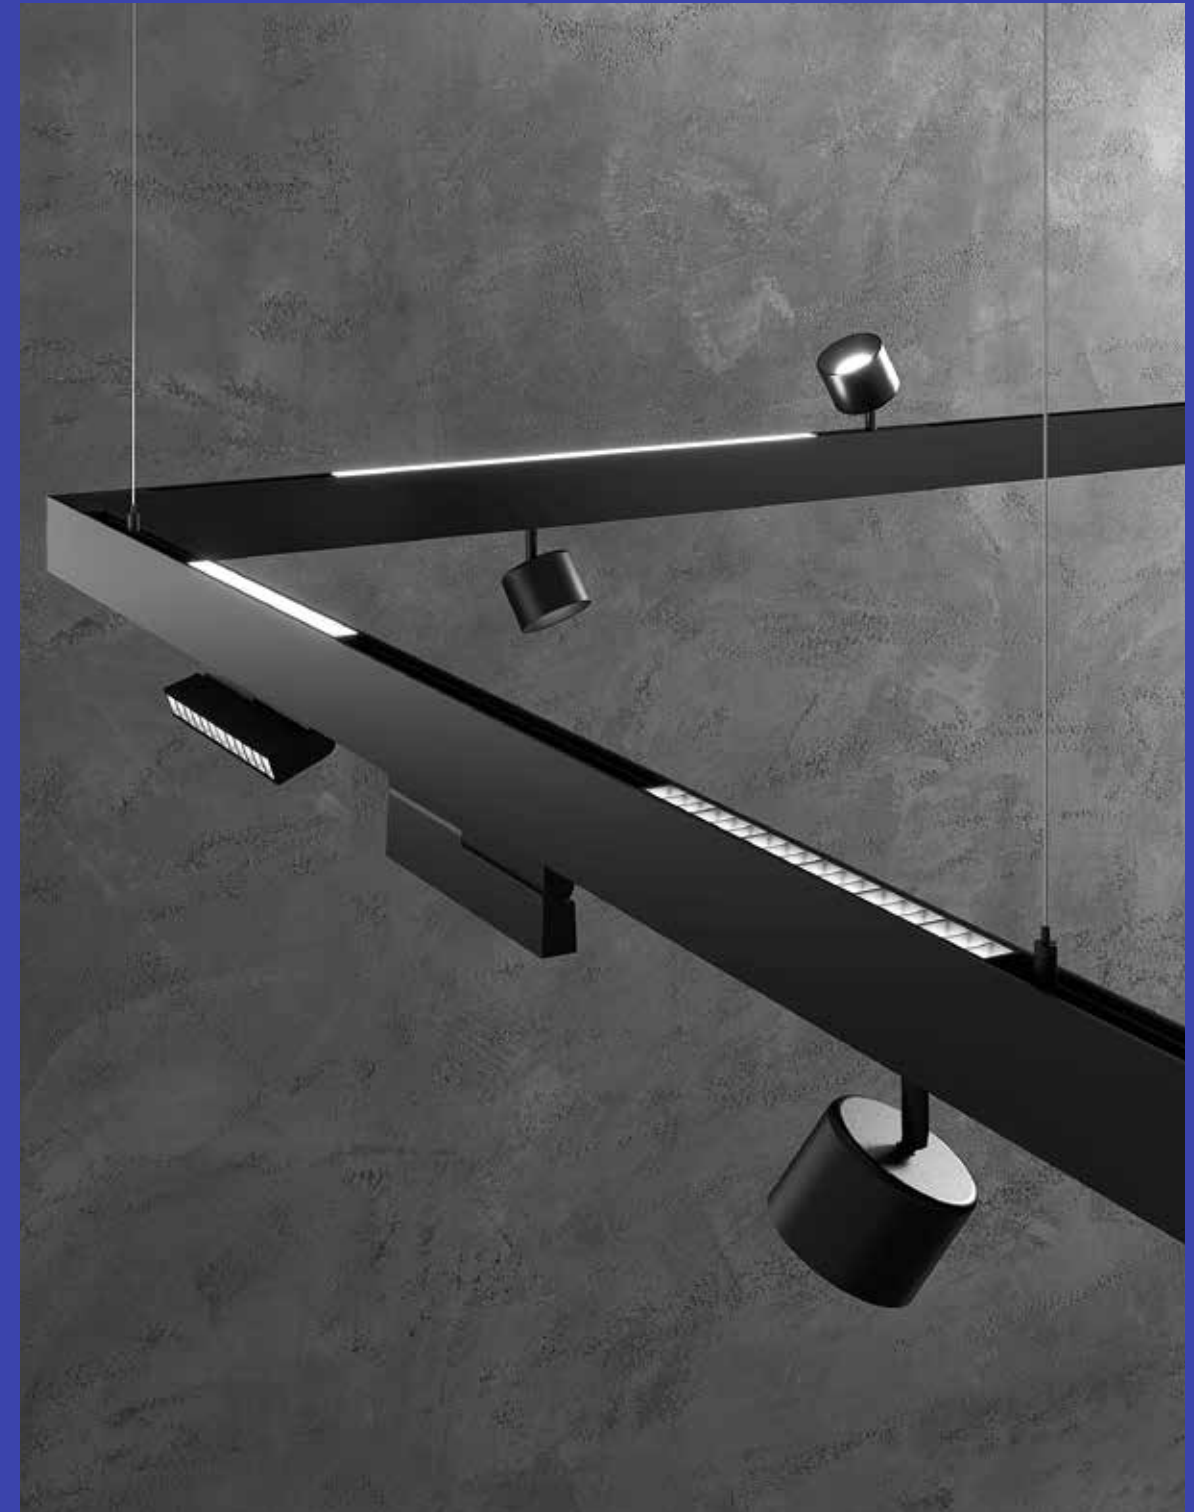

Da Vinci Project 48V  
Sfere volventi / Rolling spheres

# SHOT

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.  
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

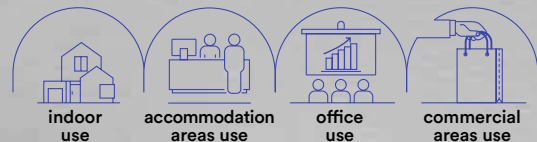

**Materiale**  
alluminio

**Colore**  
nero gofrato



**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 48V  
non incluso

**Material**  
aluminum


**Colour**  
embossed black





**Colour temperature**  
3000K / 4000K



**Driver**  
DC 48V  
not included



	colour temp.	colour
<b>DAVINCI-SHOT-B-10C</b> 8031414893911 lumen	980 lm	●
<b>DAVINCI-SHOT-B-10M</b> 8031414893928 lumen	980 lm	●
<b>watt</b>	10W	
<b>beam angle</b>	24°	




DAVINCI-SHOT-B



Da Vinci Project 48V  
Sfere volventi / Rolling spheres

# GOAL

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.  
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

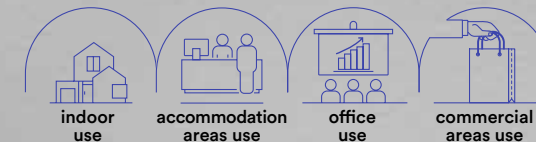

**Materiale**  
alluminio

**Colore**  
nero gofrato



**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 48V  
non incluso

**Material**  
aluminum

**Colour**  
embossed black





**Colour temperature**  
3000K / 4000K



**Driver**  
DC 48V  
not included




	colour temp.	colour
<b>DAVINCI-GOAL-B-10C</b> 8031414893935 lumen	980 lm	●
<b>DAVINCI-GOAL-B-10M</b> 8031414893942 lumen	980 lm	●
<b>watt</b>	10W	
<b>beam angle</b>	24°	



DAVINCI-GOAL-B



# FANS

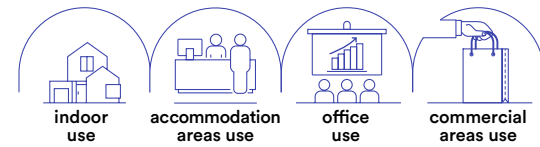

**Materiale**  
alluminio

**Colore**  
bianco opaco  
nero opaco  
oro



**Temperatura colore**  
3000K / 4000K



**Driver**  
DC48V  
non incluso

**Material**  
aluminum

**Colour**  
matt white  
matt black  
gold




**Colour temperature**  
3000K / 4000K




**Driver**  
DC48V  
not included

**Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.**  
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.



	colour temp.	colour
<b>DAVINCI-FANS-W-5C</b> 8031414893874	3000K	white
<b>DAVINCI-FANS-W-5M</b> 8031414893881	4000K	white
lumen 490 lm		
<b>DAVINCI-FANS-B-5C</b> 8031414893850	3000K	black
<b>DAVINCI-FANS-B-5M</b> 8031414893867	4000K	black
lumen 490 lm		
<b>DAVINCI-FANS-G-5C</b> 8031414893898	3000K	gold
<b>DAVINCI-FANS-G-5M</b> 8031414893904	4000K	gold
lumen 490 lm		
watt	5W	
beam angle	24°	




DAVINCI-FANS



# TEMA

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso. Diffusore in vetro trasparente.  
Track projectors with adjustable spot light for Davinci system with die-cast aluminium structure. Diffuser in clear glass.

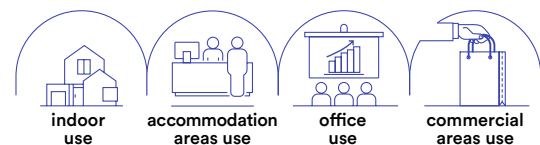


technical information **TEMA**




- Materiale**  
corpo in alluminio pressofuso
- Colore**  
bianco opaco  
nero opaco
- Temperatura colore**  
3000K / 4000K
- Driver**  
DC48V non incluso
- Material**  
aluminum die cast body
- Colour**  
matt white  
matt black
- Colour temperature**  
3000K / 4000K
- Driver**  
DC48V not included



	colour temp.	colour
<b>DAVINCI-TEMA-5C</b> 8031414876976	3000K	black
lumen	490 lm	
<b>DAVINCI-TEMA-5M</b> 8031414876983	4000K	black
lumen	490 lm	
watt		5W
beam angle		38°




	colour temp.	colour
<b>DAVINCI-TEMA-W-10C</b> 8031414894031	3000K	white
lumen	1200 lm	
<b>DAVINCI-TEMA-W-10M</b> 8031414894048	4000K	white
lumen	1200 lm	
<b>DAVINCI-TEMA-10C</b> 8031414876990	3000K	black
lumen	1200 lm	
<b>DAVINCI-TEMA-10M</b> 8031414878215	4000K	black
lumen	1200 lm	
watt		10W
beam angle		38°



**Accessori inclusi / Included accessories**  
Kit 2pz fermi per corpi illuminanti sistema con sfere volenti / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system




	colour temp.	colour
<b>DAVINCI-TEMA-W-20C</b> 8031414894055	3000K	white
lumen	1930 lm	
<b>DAVINCI-TEMA-W-20M</b> 8031414894062	4000K	white
lumen	1930 lm	
<b>DAVINCI-TEMA-20C</b> 8031414878222	3000K	black
lumen	1930 lm	
<b>DAVINCI-TEMA-20M</b> 8031414878239	4000K	black
lumen	1930 lm	
watt		20W
beam angle		38°



**Accessori inclusi / Included accessories**  
Kit 2pz fermi per corpi illuminanti sistema con sfere volenti / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system




	colour temp.	colour
<b>DAVINCI-TEMA-W-30C</b> 8031414894079	3000K	white
lumen	3210 lm	
<b>DAVINCI-TEMA-W-30M</b> 8031414894086	4000K	white
lumen	3210 lm	
<b>DAVINCI-TEMA-30C</b> 8031414878246	3000K	black
lumen	3210 lm	
<b>DAVINCI-TEMA-30M</b> 8031414878253	4000K	black
lumen	3210 lm	
watt		30W
beam angle		38°




**Accessori inclusi / Included accessories**  
Kit 2pz fermi per corpi illuminanti sistema con sfere volenti / Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system


**Fotometria del prodotto / Photometric curve**




DAVINCI-TEMA-5



DAVINCI-TEMA-10



DAVINCI-TEMA-20



DAVINCI-TEMA-30

# LINE

Lampada lineare a LED per sistema Davinci con struttura in alluminio pressofuso e finitura in nero goffrato. Disponibile in varie misure.

LED linear lamp for Davinci system with die-cast aluminum structure and embossed black finish. Available in various sizes.

### Materiale

corpo in alluminio pressofuso

### Colore

nero



### Temperatura colore

3000K / 4000K



### Driver

DC48V non incluso

### Material

aluminum die cast body

### Colour

black




### Colour temperature

3000K / 4000K



### Driver

DC48V not included

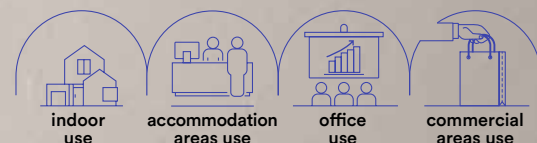

technical information **LINE**




#### DAVINCI-LINE30C-UGR

8031414878321

lumen

colour temp.



1200 lm

#### DAVINCI-LINE30M-UGR

8031414878338

lumen




1200 lm

watt

10W

beam angle

30°

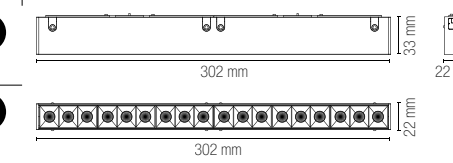


#### DAVINCI-LINE30C

8031414878260

lumen

colour temp.




1150 lm

#### DAVINCI-LINE30M

8031414878277

lumen




1150 lm

watt

10W

beam angle

110°

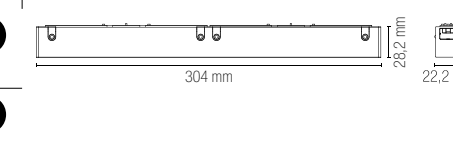

#### DAVINCI-LINE60C

8031414878284

lumen

colour temp.



2300 lm

#### DAVINCI-LINE60M

8031414878291

lumen




2300 lm

watt

20W

beam angle

110°

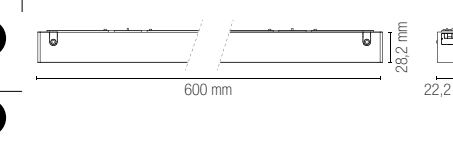


#### DAVINCI-LINE90C

8031414878666

lumen

colour temp.



3450 lm

#### DAVINCI-LINE90M

8031414878635

lumen




3450 lm

watt

30W

beam angle

110°

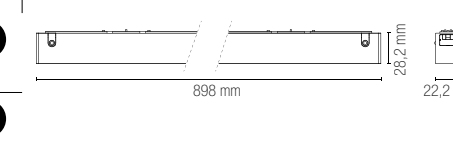


#### DAVINCI-LINE120C

8031414878642

lumen

colour temp.




4600 lm

#### DAVINCI-LINE120M

8031414878611

lumen




4600 lm

watt

40W

beam angle

110°

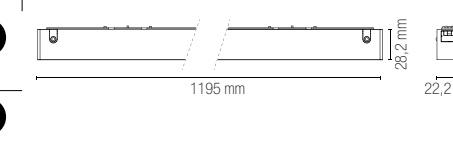

### Fotometria del prodotto / Photometric curve



DAVINCI-LINE30 UGR

DAVINCI-LINE30


DAVINCI-LINE60

DAVINCI-LINE90

DAVINCI-LINE120


# SLIDE

Lampada lineare orientabile a LED per sistema Davinci con struttura in alluminio pressofuso.  
LED adjustable linear lamp for Davinci system with die-cast aluminum structure.

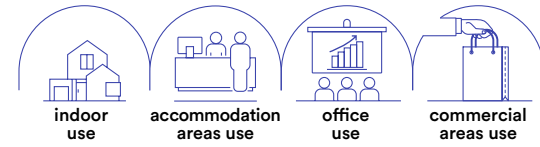


# TUBO

Sospensioni tubolari a LED per sistema Davinci con struttura in alluminio pressofuso.  
LED tubular suspensions for Davinci system with die-cast aluminum structure.

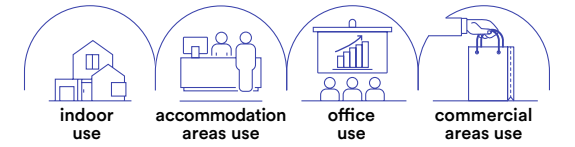

	colour temp.	colour
<b>DAVINCI-W-S35C</b> 8031414894093 lumen		
	300 lm	
<b>DAVINCI-W-S35M</b> 8031414894109 lumen		
	300 lm	
<b>DAVINCI-S35C</b> 8031414878390 lumen		
	300 lm	
<b>DAVINCI-S35M</b> 8031414878406 lumen		
	300 lm	
<b>DAVINCI-G-S35C</b> 8031414894116 lumen		
	300 lm	
<b>DAVINCI-G-S35M</b> 8031414894123 lumen		
	300 lm	
watt	3W	
beam angle	24°	

	colour temp.	colour
<b>DAVINCI-S60C</b> 8031414878680 lumen		
	500 lm	
<b>DAVINCI-S60M</b> 8031414878659 lumen		
	500 lm	
watt	5W	
beam angle	24°	

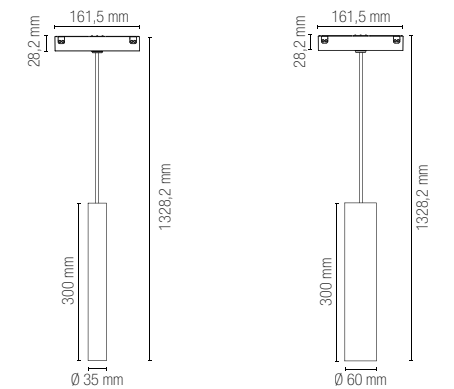

Fotometria del prodotto / Photometric curve



DAVINCI-S35

DAVINCI-S60

**Materiale**  
corpo in alluminio pressofuso

**Colore**  
bianco opaco  
nero opaco  
oro

**Temperatura colore**  
3000K / 4000K



**Driver**  
DC48V non incluso



**Material**  
aluminum die cast body

**Colour**  
matt white  
matt black  
gold


**Colour temperature**  
3000K / 4000K




**Driver**  
DC48V not included

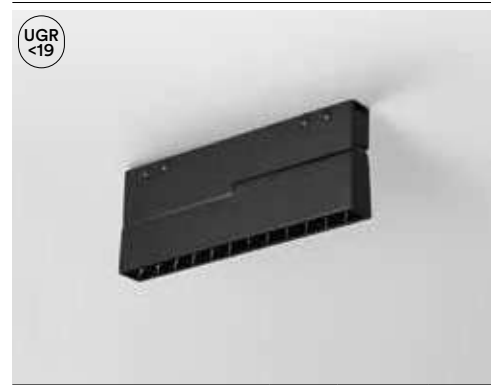

	colour temp.	colour
<b>DAVINCI-SLIDE20C-UGR</b> 8031414878369 lumen		
	1020 lm	
<b>DAVINCI-SLIDE20M-UGR</b> 8031414878376 lumen		
	1020 lm	
watt	10W	
beam angle	30°	



	colour temp.	colour
<b>DAVINCI-SLIDE20C</b> 8031414878345 lumen		
	980 lm	
<b>DAVINCI-SLIDE20M</b> 8031414878352 lumen		
	980 lm	
watt	10W	
beam angle	110°	



Fotometria del prodotto / Photometric curve



DAVINCI-SLIDE20 UGR

DAVINCI-SLIDE20

**Materiale**

corpo in alluminio pressofuso

**Colore**

nero opaco



**Temperatura colore**  
3000K / 4000K



**Driver**

DC48V non incluso

**Material**

aluminum die cast body

**Colour**

matt black



**Colour temperature**  
3000K / 4000K



**Driver**

DC48V not included





Da Vinci Project 48V  
Sfere volventi / Rolling spheres

# CYMBAL

Lampada a sospensione  
LED in alluminio  
per sistema a binario.  
Aluminum LED suspension  
lamp for track system.

**Materiale**  
alluminio

**Colore**  
bianco opaco  
nero opaco



**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 48V  
non incluso

**Material**  
aluminum


**Colour**  
matt white  
matt black



**Colour temperature**  
3000K / 4000K





**Driver**  
DC 48V  
not included


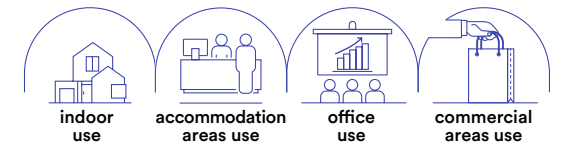


	colour temp.	colour
<b>DAVINCI-W-S40C</b> 8031414894017		
lumen	1855 lm	
<b>DAVINCI-W-S40M</b> 8031414894024		
lumen	1855 lm	
<b>DAVINCI-S40C</b> 8031414893997		
lumen	1855 lm	
<b>DAVINCI-S40M</b> 8031414894000		
lumen	1855 lm	


	colour temp.	colour
<b>DAVINCI-W-S15C</b> 8031414893973		
lumen	780 lm	
<b>DAVINCI-W-S15M</b> 8031414893980		
lumen	780 lm	
<b>DAVINCI-S15C</b> 8031414893959		
lumen	780 lm	
<b>DAVINCI-S15M</b> 8031414893966		
lumen	780 lm	

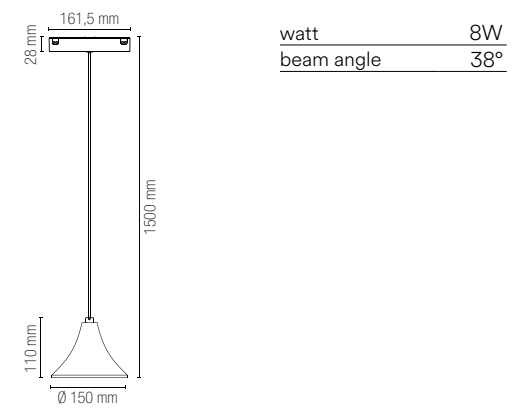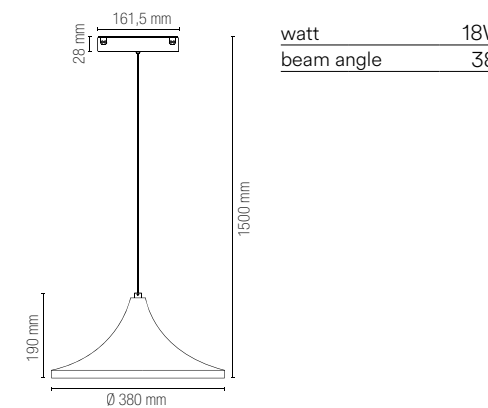

Fotometria del prodotto / Photometric curve



# DA VINCI PROJECT 48V



## Da Vinci Project 48V / RECESSED TRACK TRIMLESS Sistema di montaggio a incasso a filo / Recess mount system trimless


Binari ed accessori / Track rail and components



### DAVINCI-TL-2M 8031414878055

Binario sistema Davinci  
montaggio ad incasso a filo  
2 m nero 48V.  
Tappi e staffa di fissaggio inclusi.



Davinci system track rail invisible  
recessed trimless mount black  
colour 2 m 48V.  
Cups and fixing bracket included.



### DAVINCI-TL-L 8031414878109

Connettore angolare in alluminio  
per binario elettrificato incasso a filo  
(trimless) sistema sfere volventi.


Angular connection in aluminum  
for Davinci trimless recessed rail  
in rolling spheres joint system.



### DAVINCI-TL-LVI 8031414878673

Connettore angolare verticale  
connessione interna per binario  
elettrificato incasso a filo (trimless)  
con sistema sfere volventi.


Vertical angular connector internal  
connection for track electrified  
recessed rail (trimless) system  
built in rolling spheres joint system.



### DAVINCI-TL-LVE 8031414878147

Connettore angolare verticale con  
connessione esterna in alluminio  
per binario elettrificato incasso a filo  
(trimless) con sistema sfere volventi.

Angular external emission  
connection in aluminum for  
electrified track trimless recessed  
rail in rolling spheres joint system.



### DAVINCI-TL-CAP 8031414878093

Tappo laterale per binario da  
incasso a filo (trimless)  
sistema sfere volventi.

End cap for Davinci trimless  
recessed rail in rolling  
spheres joint system.





## Da Vinci Project 48V / RECESSED TRACK

Sistema di montaggio a incasso con cornice / Recess mount system with external trim

Binari ed accessori / Track rail and components



**DAVINCI-INC-2M-BCO**  
8031414894130

Binario sistema Davinci montaggio ad incasso 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.


Davinci system track rail recessed mount white colour 2 m 48V. Cups and fixing bracket included.



**DAVINCI-INC-2M**  
8031414878024

Binario sistema Davinci montaggio ad incasso 2 m nero 48V. Tappi e staffa di fissaggio inclusi.


Davinci system track rail recessed mount black colour 2 m 48V. Cups and fixing bracket included.



**DAVINCI-INC-L-BCO**  
8031414894147

Connettore angolare per binario elettrificato incasso sistema sfere volventi.


Angular connector for electrified track built in rolling spheres joint system.



**DAVINCI-INC-L**  
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi.

Angular connector for electrified track built in rolling spheres joint system.



**DAVINCI-INC-LVI-BCO**  
8031414894154

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.


Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.



**DAVINCI-INC-LVI**  
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.

Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.



**DAVINCI-INC-LVE-BCO**  
8031414894161

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.


Vertical angular connector external connection for track electrified system built in rolling spheres joint system.



**DAVINCI-INC-LVE**  
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.

Vertical angular connector external connection for track electrified system built in rolling spheres joint system.



**DAVINCI-INC-CAP-BCO**  
8031414894178

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.



**DAVINCI-INC-CAP**  
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi.

End cap for recessed Davinci with rolling spheres joint system.



## Da Vinci Project 48V / PENDANT

Sistema di montaggio a sospensione biemissione/ Biemission suspension mounting system


Binari ed accessori / Track rail and components



**DAVINCI-H-2M**  
8031414878017

Binario sistema Davinci per montaggio a sospensione con doppia emissione; nero da 2 m 48V. Tappi e staffa di fissaggio inclusi.


Davinci system rail for suspension mounting with double emission; black 2 m 48V. Cups and fixing bracket included.



**DAVINCI-H-L**  
8031414878048

Connettore angolare in alluminio per binario elettrificato biemissione con sistema sfere volventi.

Aluminum angular connection for double emission electrified track with rolling ball system.



**DAVINCI-H-CAP**  
8031414878451

Tappo laterale per binario biemissione con sistema sfere volventi.


End cap for double emitting Davinci rail in rolling spheres joint system.



**DAVINCI-BOX**  
8031414878598

Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.




**DAVINCI-S-3**  
8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.





## Da Vinci Project 48V / SURFACE MOUNTED

### Sistema di montaggio a plafoniera o a sospensione a vista/ Ceiling or suspension mounting system

Binari ed accessori / Track rail and components

Driver 48V per sistema Davinci p. 844  
48V drivers for Davinci system p. 844



#### DAVINCI-ST-2M-BCO 8031414894185


Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m white 48V. Cups and fixing bracket included.

#### DAVINCI-ST-2M 8031414878031

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m black 48V. Cups and fixing bracket included.



#### DAVINCI-ST-L-BCO 8031414894192


Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.

#### DAVINCI-ST-L 8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.



#### DAVINCI-ST-LVI-BCO 8031414894208


Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.

#### DAVINCI-ST-LVI 8031414878079

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.



#### DAVINCI-ST-LVE-BCO 8031414894215


Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.

#### DAVINCI-ST-LVE 8031414878086

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.



#### DAVINCI-ST-CAP-BCO 8031414894222

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.

#### DAVINCI-ST-CAP 8031414878468

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.

#### DAVINCI-BOX-BCO 8031414894246


Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.

#### DAVINCI-BOX 8031414878598

Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.



#### DAVINCI-S-3-BCO 8031414894239

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.

#### DAVINCI-S-3 8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.

#### DAVINCI-NEST 8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di binario del sistema Davinci.


48V power engine for all Davinci rail system models.



#### DAVINCI-FLEX 8031414894253

Innesto per elettrificazione 48V flessibile compatibile con tutti i modelli di binario Davinci.

Flexible 48V electrification mount compatible with all Davinci rail models.



#### DAVINCI-I-CONN 8031414878178

Connettore 48V compatibile con i modelli di binario sistema Davinci.

Connector 48V compatible with all the Davinci rail system models.



#### DAVINCI-COVER-2M 8031414878154


Cover nera compatibile con tutti i modelli di binari Davinci 200 cm.

Cover in black colour compatible with all the Davinci track rail models 200 cm.

#### DAVINCI-L-CONN 8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema Davinci.

Angular connector 48V compatible with all the Davinci rail system models.



#### DAVINCI-BRAKE 8031414878383


Kit 2pz fermi per corpi illuminanti sistema con sfere volventi.

Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system.

#### DAVINCI-LVI-CONN 8031414878192

Connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema Davinci.


Internal angular connector 48V compatible with all the Davinci rail system models.



#### DAVINCI-DR100 8031414924813

Driver 100W 48V per binario Davinci.


100W 48V driver for Davinci system.



#### DAVINCI-LVE-CONN 8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema Davinci.


External angular connector 48V compatible with all the Davinci rail system models.



#### DAVINCI-DR200 8031414924820

Driver 200W 48V per binario Davinci.

200W 48V driver for Davinci system.




# BERNINI PROJECT 48V

INTEC proietta il suo sguardo nel futuro e si immerge nel mondo dell'arte illuminotecnica altamente personalizzata, garantendo contemporaneamente efficienza e flessibilità nel design.


Frutto di un attento studio delle tecnologie più avanzate, il binario Bernini è un sistema completamente elettrificato a bassa tensione. La vasta gamma di corpi illuminanti Bernini, insieme al caleidoscopio di forme, angoli e connessioni disponibili, consente di creare aree luminose dalle pareti o dal soffitto, modificandone i giochi di luce in qualsiasi momento tramite gli elementi luminosi a LED che si inseriscono facilmente con un click, grazie al sistema innovativo a incastro a sfere volventi lungo l'intero percorso.

INTEC casts its gaze into the future and plunges into the world of highly customized lighting art, simultaneously ensuring efficiency and flexibility in design.

The result of a careful study of the most advanced technologies, the Bernini track is a fully electrified low-voltage system. Bernini's wide range of luminaires, together with the kaleidoscope of available shapes, angles and connections, makes it possible to create luminous areas from the walls or ceiling, changing the play of light at any time through LED lighting elements that are easily inserted with a click, thanks to the innovative system of interlocking rolling spheres along the entire path.

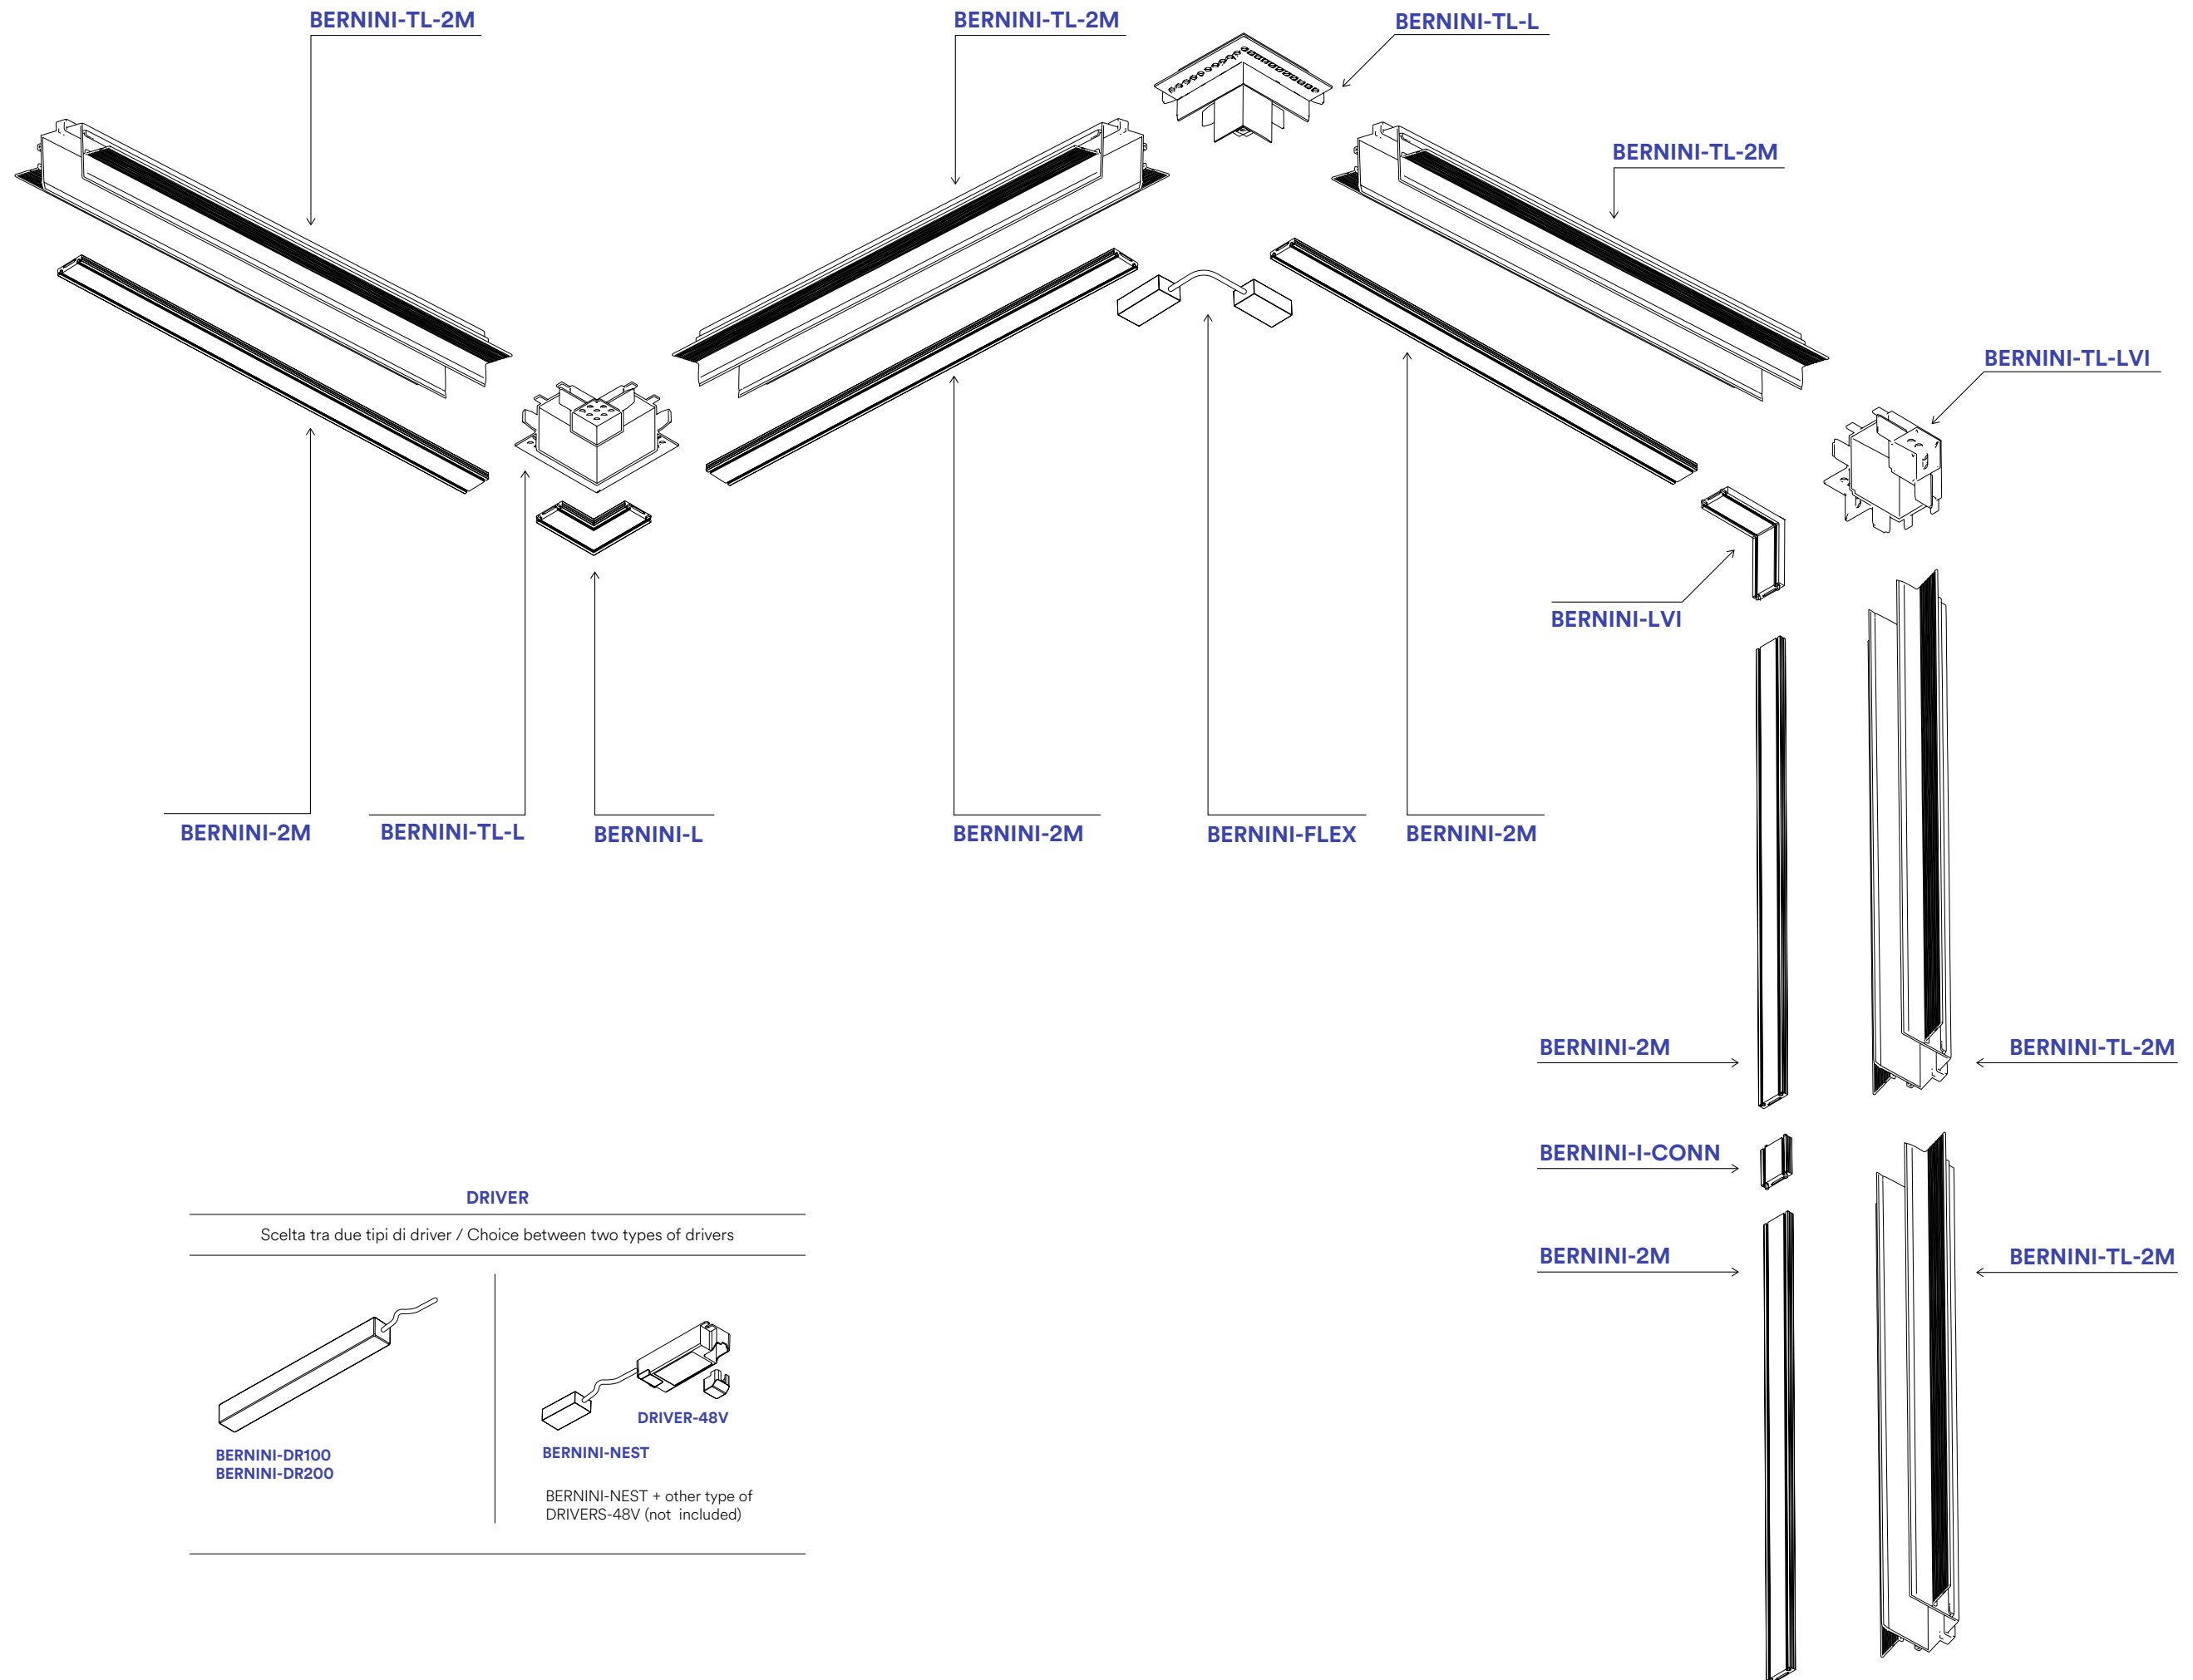

**BERNINI  
PROJECT  
48V**

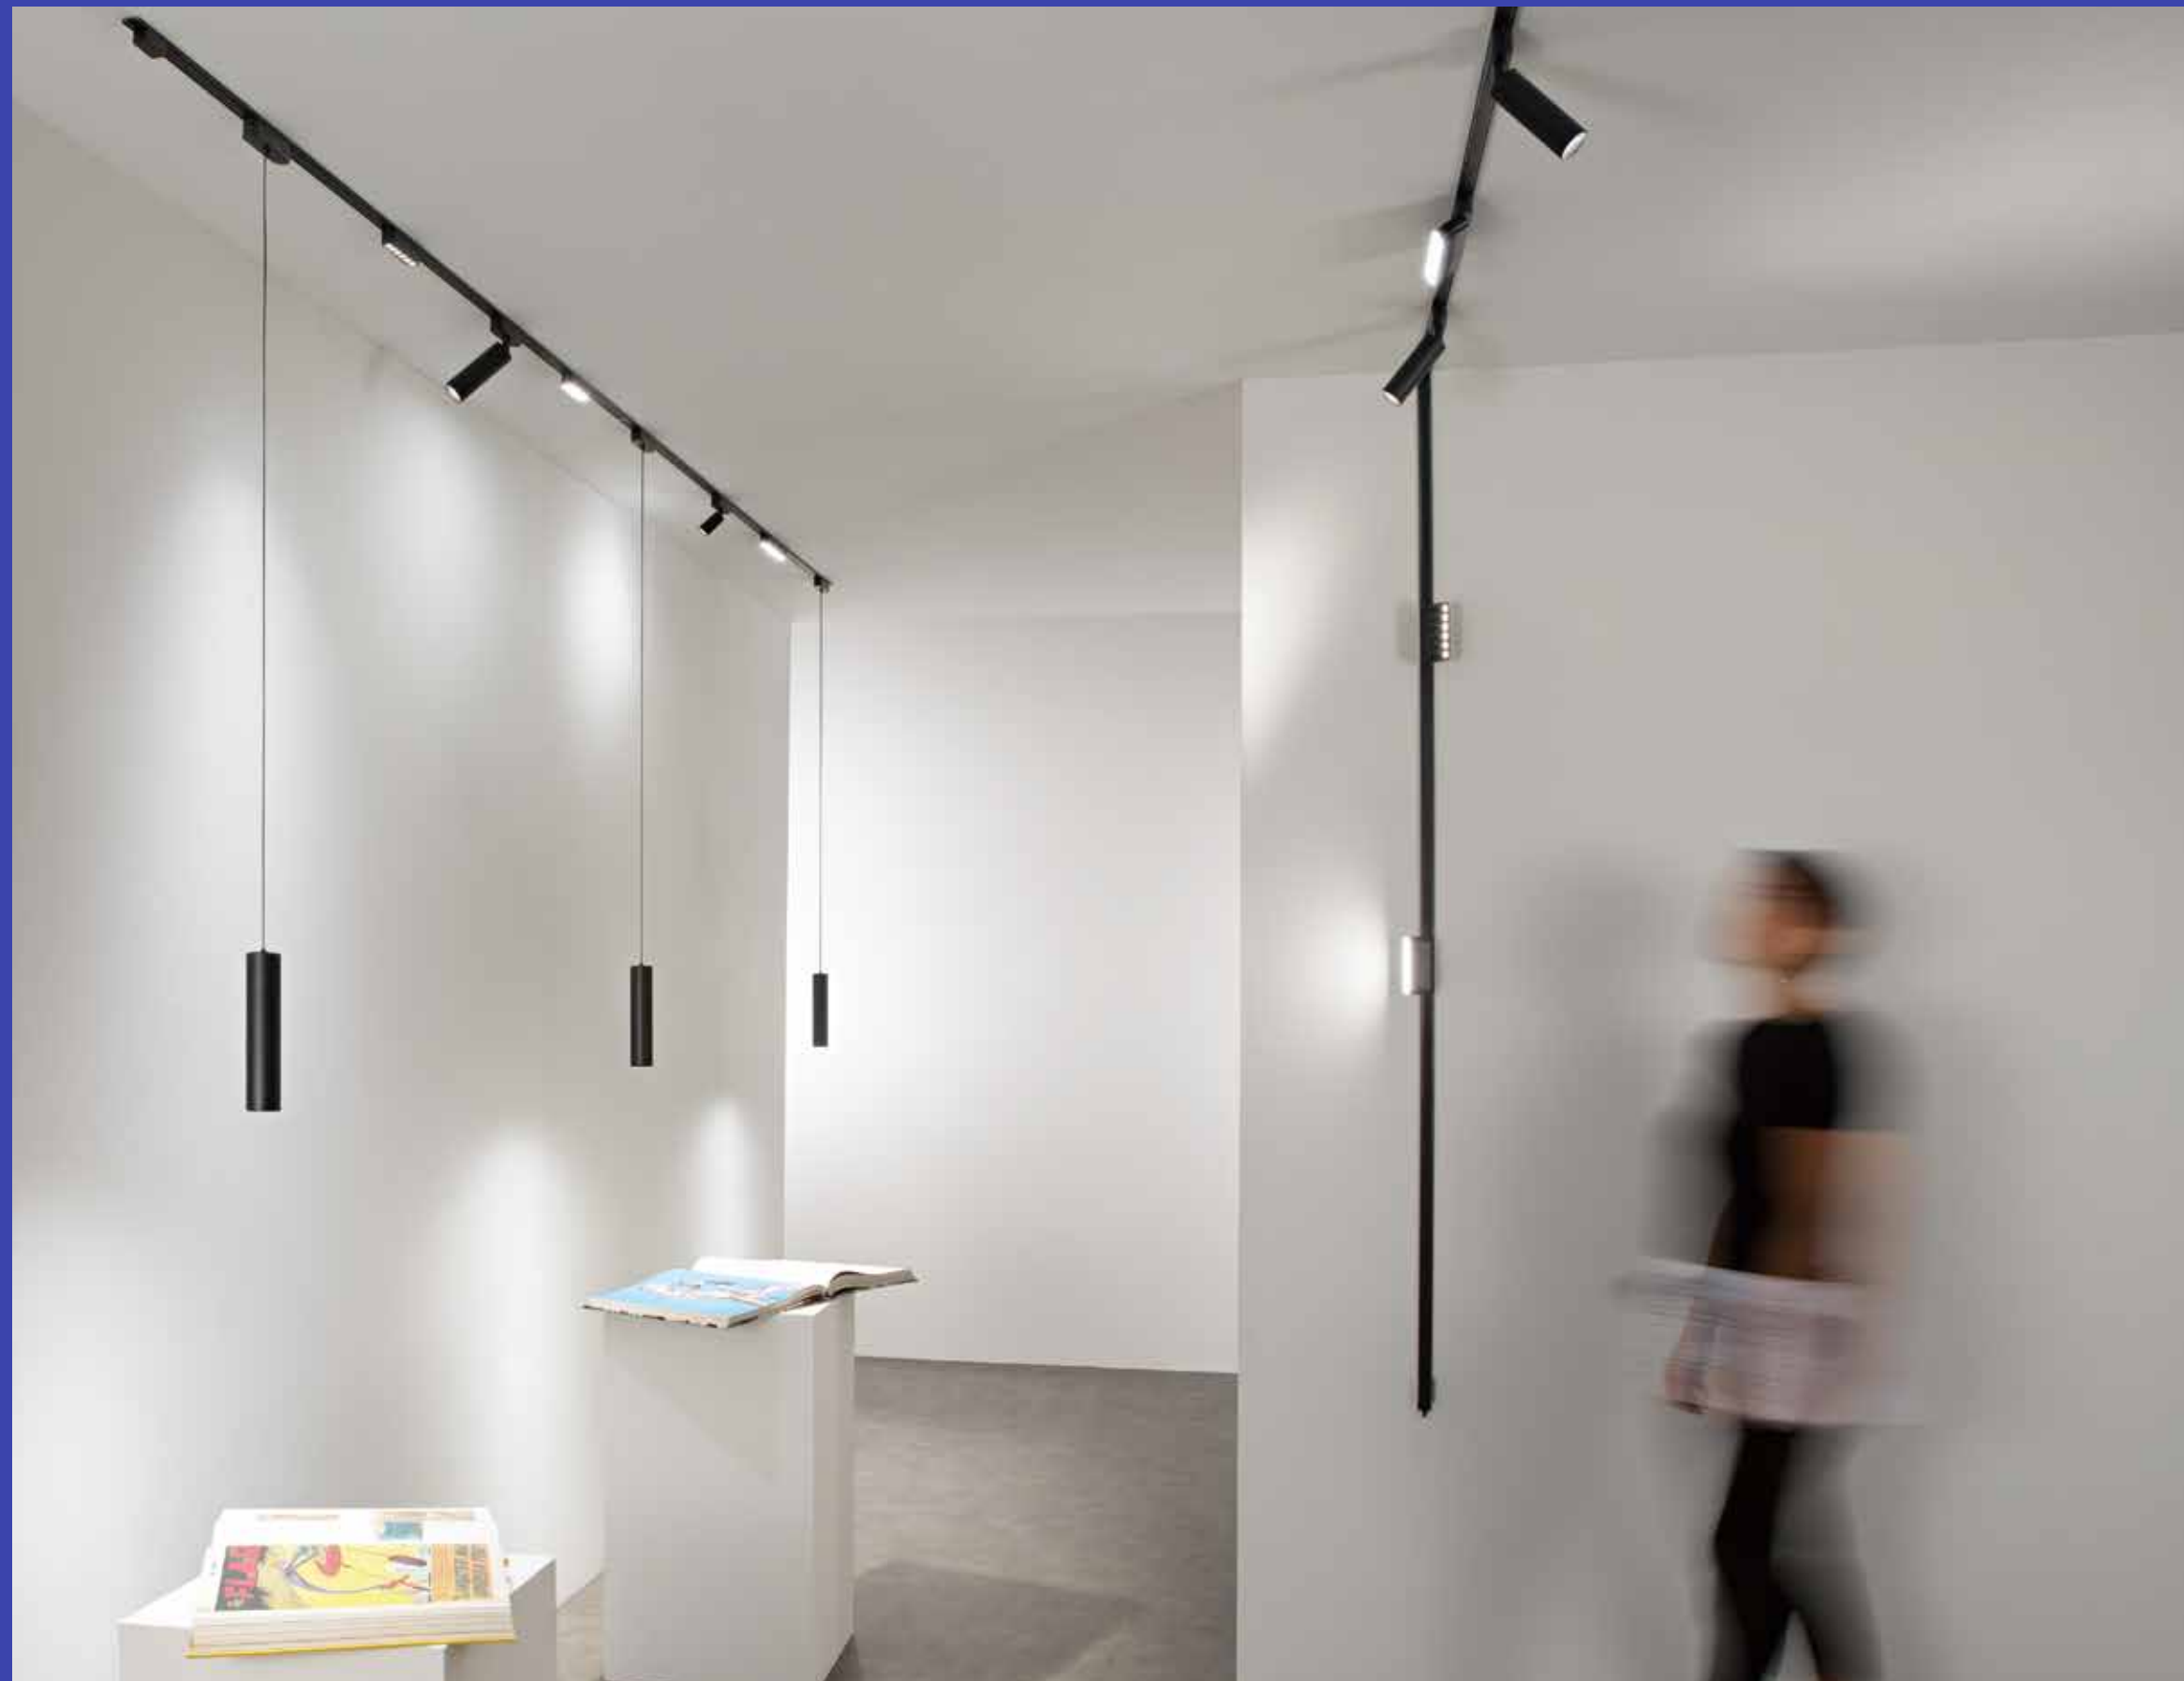


Bernini Project 48V

# BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.

Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

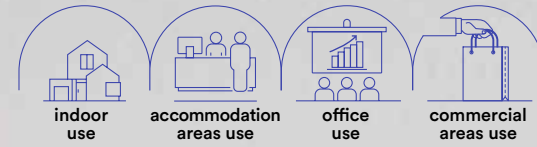

**Materiale**

alluminio e termoplastica

**Colore**

bianco opaco  
nero opaco



**Temperatura colore**

3000K / 4000K



**Driver**

DC48V non incluso

**Material**

aluminum and thermoplastic

**Colour**

matt white  
matt black



**Colour temperature**

3000K / 4000K



**Driver**

DC48V not included



collection **BERNINI LINE**



In.tec light **SISTEMA BINARI / TRACK LIGHTS**

# BERNINI LINE

**Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.**  
 Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

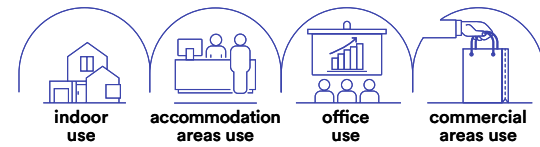

technical information **BERNINI LINE**



**Materiale**

alluminio e termoplastica

**Colore**

bianco opaco  
nero opaco



**Temperatura colore**

3000K / 4000K



**Driver**

DC48V non incluso

**Material**

aluminum and thermoplastic

**Colour**

matt white  
matt black



**Colour temperature**

3000K / 4000K




**Driver**


DC48V not included




	colour temp.	colour
<b>BERNINI-LINE12-BCO</b> 8031414920037	3000K	white
lumen	720 lm	
<b>BERNINI-LINE12</b> 8031414907502	3000K	black
lumen	720 lm	
watt		6W
beam angle		30°



	colour temp.	colour
<b>BERNINI-LINE12-UGR-BCO</b> 8031414920044	3000K	white
lumen	720 lm	
<b>BERNINI-LINE12-UGR</b> 8031414907519	3000K	black
lumen	720 lm	
watt		6W
beam angle		30°



	colour temp.	colour
<b>BERNINI-LINE22-UGR-BCO</b> 8031414920068	3000K	white
lumen	720 lm	
<b>BERNINI-LINE22-UGR</b> 8031414907533	3000K	black
lumen	720 lm	
watt		12W
beam angle		30°



	colour temp.	colour
<b>BERNINI-LINE22-BCO</b> 8031414920051	3000K	white
lumen	720 lm	
<b>BERNINI-LINE22</b> 8031414907526	3000K	black
lumen	720 lm	
watt		12W
beam angle		30°




**Accessorio non incluso / Not included accessory**

Adattatore per lampada lineare LED / Adapter for linear LED lamp

**BERNINI-LINE-ADAT12-BCO**  
8031414920075

**BERNINI-LINE-ADAT12**  
8031414898169




**Accessorio non incluso / Not included accessory**


Adattatore per lampada lineare LED / Adapter for linear LED lamp

**BERNINI-LINE-ADAT22-BCO**  
8031414920082


**BERNINI-LINE-ADAT22**  
8031414898176




**Fotometria del prodotto / Photometric curve**




BERNINI-LINE12-UGR



BERNINI-LINE12





BERNINI-LINE22-UGR



BERNINI-LINE22

# BERNINI FANS

Faro luce spot orientabile per sistema a binario in termoplastica con finitura in bianco o nero opaco.  
Adjustable spot light in thermoplastic and aluminum track system with matt white or black finish.

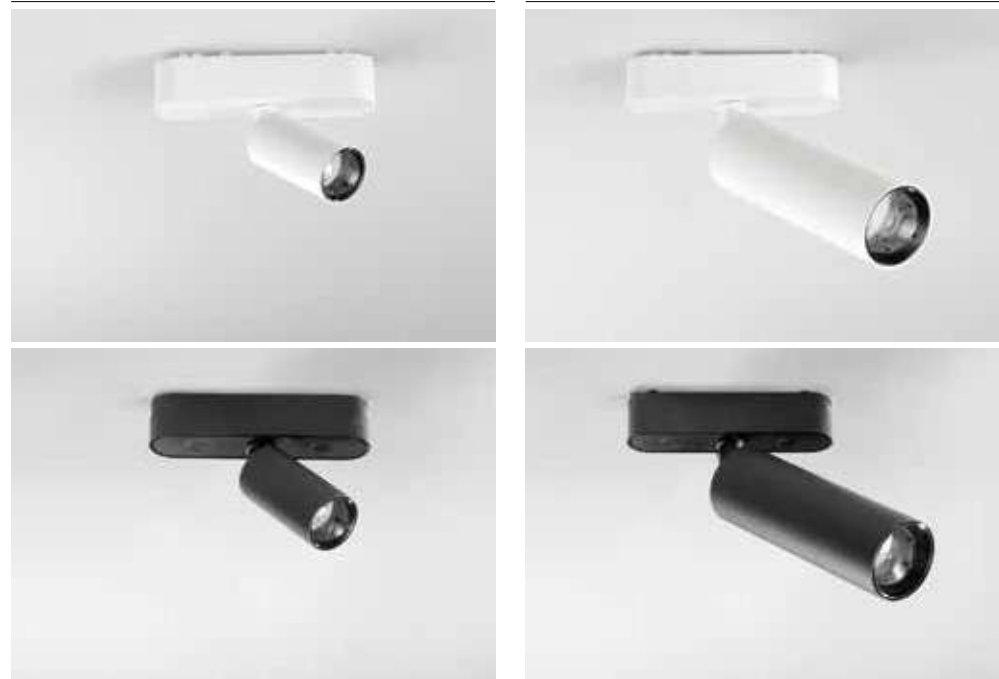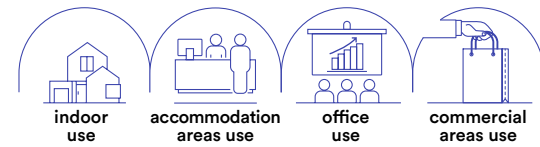

**Materiale**

alluminio e termoplastica

**Colore**

bianco opaco  
nero opaco



**Temperatura colore**

3000K / 4000K



**Driver**

DC48V non incluso

**Material**

aluminum and thermoplastic

**Colour**

matt white  
matt black



**Colour temperature**


3000K / 4000K




**Driver**

DC48V not included


	colour temp.	colour
<b>BERNINI-FANS-5-BCO</b> 8031414919994 lumen		
<b>BERNINI-FANS-5</b> 8031414907496 lumen		
watt	5W	
beam angle	24°	




	colour temp.	colour
<b>BERNINI-FANS-15-BCO</b> 8031414919680 lumen		
<b>BERNINI-FANS-15</b> 8031414907489 lumen		
watt	15W	
beam angle	30°	




Fotometria del prodotto / Photometric curve



BERNINI-FANS-5



BERNINI-FANS-15



# BERNINI TUBO

Lampada sospensione LED per sistema binario in termoplastica e alluminio con finitura in nero opaco.  
LED suspension lamp in aluminum and thermoplastic rail system with matt black finish.

**Materiale**

alluminio e termoplastica

**Colore**

bianco opaco  
nero opaco



**Temperatura colore**

3000K / 4000K



**Driver**

DC48V non incluso

**Material**

aluminum and thermoplastic

**Colour**

matt white  
matt black



**Colour temperature**

3000K / 4000K




**Driver**


DC48V not included



	colour temp.	colour
<b>BERNINI-S10-BCO</b> 8031414920112 lumen		
<b>BERNINI-S10</b> 8031414907540 lumen		
watt	9W	
beam angle	24°	

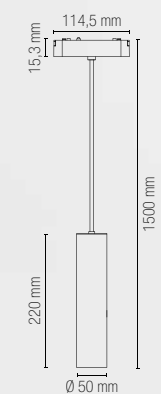

























Fotometria del prodotto / Photometric curve



BERNINI-S10

**Binari ed accessori.**  
Track rail and components.

	<b>BERNINI-2M-BCO</b> 8031414919598 Binario Bernini 2 metri bianco 48V. 2 Tappi inclusi.	Bernini track rail white color 2 meters 48V. 2 Cups included.		<b>BERNINI-2M</b> 8031414897735 Binario Bernini 2 metri nero 48V. 2 Tappi inclusi.	Bernini track rail black color 2 meters 48V. 2 Cups included.	
	<b>BERNINI-L-BCO</b> 8031414920020 Connettore angolare per binario elettrificato 48V.	Corner connector for 48V track.		<b>BERNINI-L</b> 8031414897773 Connettore angolare per binario elettrificato 48V.	Corner connector for 48V track.	
	<b>BERNINI-T-BCO</b> 8031414920129 Connettore a T per binario elettrificato 48V.	T connector for 48V electrified track.		<b>BERNINI-T</b> 8031414897780 Connettore a T per binario elettrificato 48V.	T connector for 48V electrified track.	
	<b>BERNINI-X-BCO</b> 8031414920167 Connettore a croce per binario elettrificato 48V.	Cross connector for 48V electrified track.		<b>BERNINI-X</b> 8031414898091 Connettore a croce per binario elettrificato 48V.	Cross connector for 48V electrified track.	
	<b>BERNINI-LVI-BCO</b> 8031414920099 Connettore angolare per binario elettrificato 48V.	Angular connector for 48V electrified track.		<b>BERNINI-LVI</b> 8031414898107 Connettore angolare per binario elettrificato 48V.	Angular connector for 48V electrified track.	
	<b>BERNINI-FLEX-BCO</b> 8031414920006 Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.	48V electrification mount compatible with all Bernini rail models.		<b>BERNINI-FLEX</b> 8031414898152 Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.	48V electrification mount compatible with all Bernini rail models.	
	<b>BERNINI-NEST-BCO</b> 8031414920105 Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.	48V electrification mount compatible with all Bernini rail models.		<b>BERNINI-NEST</b> 8031414898145 Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.	48V electrification mount compatible with all Bernini rail models.	
	<b>BERNINI-I-CONN-BCO</b> 8031414920013 Connettore 48V compatibile con tutti i modelli di binario Bernini.	48V connector compatible with all Bernini rail models.		<b>BERNINI-I-CONN</b> 8031414898114 Connettore 48V compatibile con tutti i modelli di binario Bernini.	48V connector compatible with all Bernini rail models.	










**Binari ed accessori.**  
Track rail and components.

	<p><b>BERNINI-TL-2M-BCO</b> 8031414920136</p> <p>Alloggio per sistema binario montaggio ad incasso a filo 2 metri.</p>	<p>Housing for recessed trimeless track rail system 2 meters.</p>		<p><b>BERNINI-TL-2M</b> 8031414897759</p> <p>Alloggio per sistema binario montaggio ad incasso a filo 2 metri.</p>	<p>Housing for recessed trimeless track rail system 2 meters.</p>	
	<p><b>BERNINI-TL-L-BCO</b> 8031414920143</p> <p>Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.</p>	<p>Angular vertical connector for housing with recessed trimeless track rail system.</p>		<p><b>BERNINI-TL-L</b> 8031414898138</p> <p>Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.</p>	<p>Angular vertical connector for housing with recessed trimeless track rail system.</p>	
	<p><b>BERNINI-TL-LVI-BCO</b> 8031414920150</p> <p>Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.</p>	<p>Angular vertical connector for housing with recessed trimeless track rail system.</p>		<p><b>BERNINI-TL-LVI</b> 8031414898121</p> <p>Connettore angolare verticale per alloggio con montaggio ad incasso a filo per binario Bernini.</p>	<p>Angular vertical connector for housing with recessed trimeless track rail system.</p>	
	<p><b>BERNINI-CAP-BCO</b> 8031414919642</p> <p>kit 2 pezzi tappi laterali per binario elettrificato 48V.</p>	<p>2 pcs kit caps 48V electrified track.</p>		<p><b>BERNINI-CAP</b> 8031414897742</p> <p>kit 2 pezzi tappi laterali per binario elettrificato 48V.</p>	<p>2 pcs kit caps 48V electrified track.</p>	
	<p><b>BERNINI-COVER-2M-BCO</b> 8031414919659</p> <p>Cover nera compatibile con i modelli del binario Bernini.</p>	<p>Black cover compatible with Bernini track rail models.</p>		<p><b>BERNINI-COVER-2M</b> 8031414897766</p> <p>Cover nera compatibile con i modelli del binario Bernini.</p>	<p>Black cover compatible with Bernini track rail models.</p>	
	<p><b>BERNINI-DR100-BCO</b> 8031414919666</p> <p>Driver 48V 100W corrente costante.</p>	<p>Driver 48V 100W constant current.</p>		<p><b>BERNINI-DR100</b> 8031414898183</p> <p>Driver 48V 100W corrente costante.</p>	<p>Driver 48V 100W constant current.</p>	
	<p><b>BERNINI-DR200-BCO</b> 8031414919673</p> <p>Driver 48V 200W corrente costante.</p>	<p>Driver 48V 200W constant current.</p>		<p><b>BERNINI-DR200</b> 8031414897940</p> <p>Driver 48V 200W corrente costante.</p>	<p>Driver 48V 200W constant current.</p>	

# TRACK RAIL THREE-PHASE




# TRACK RAIL THREE-PHASE

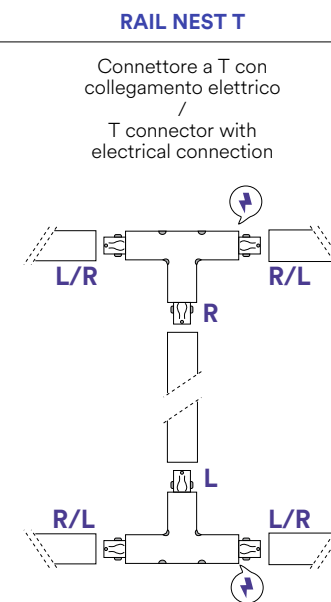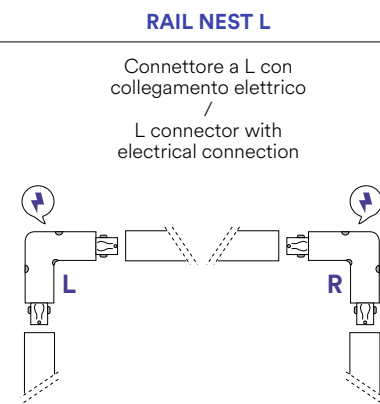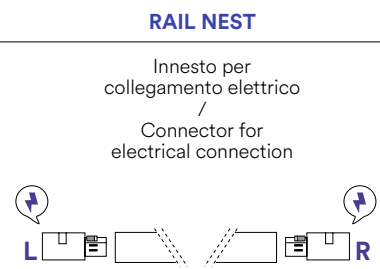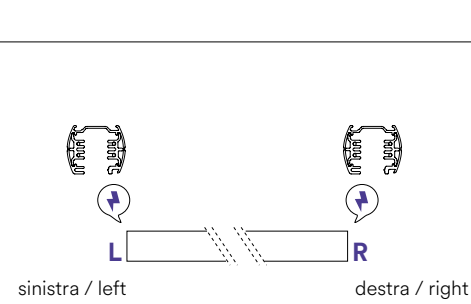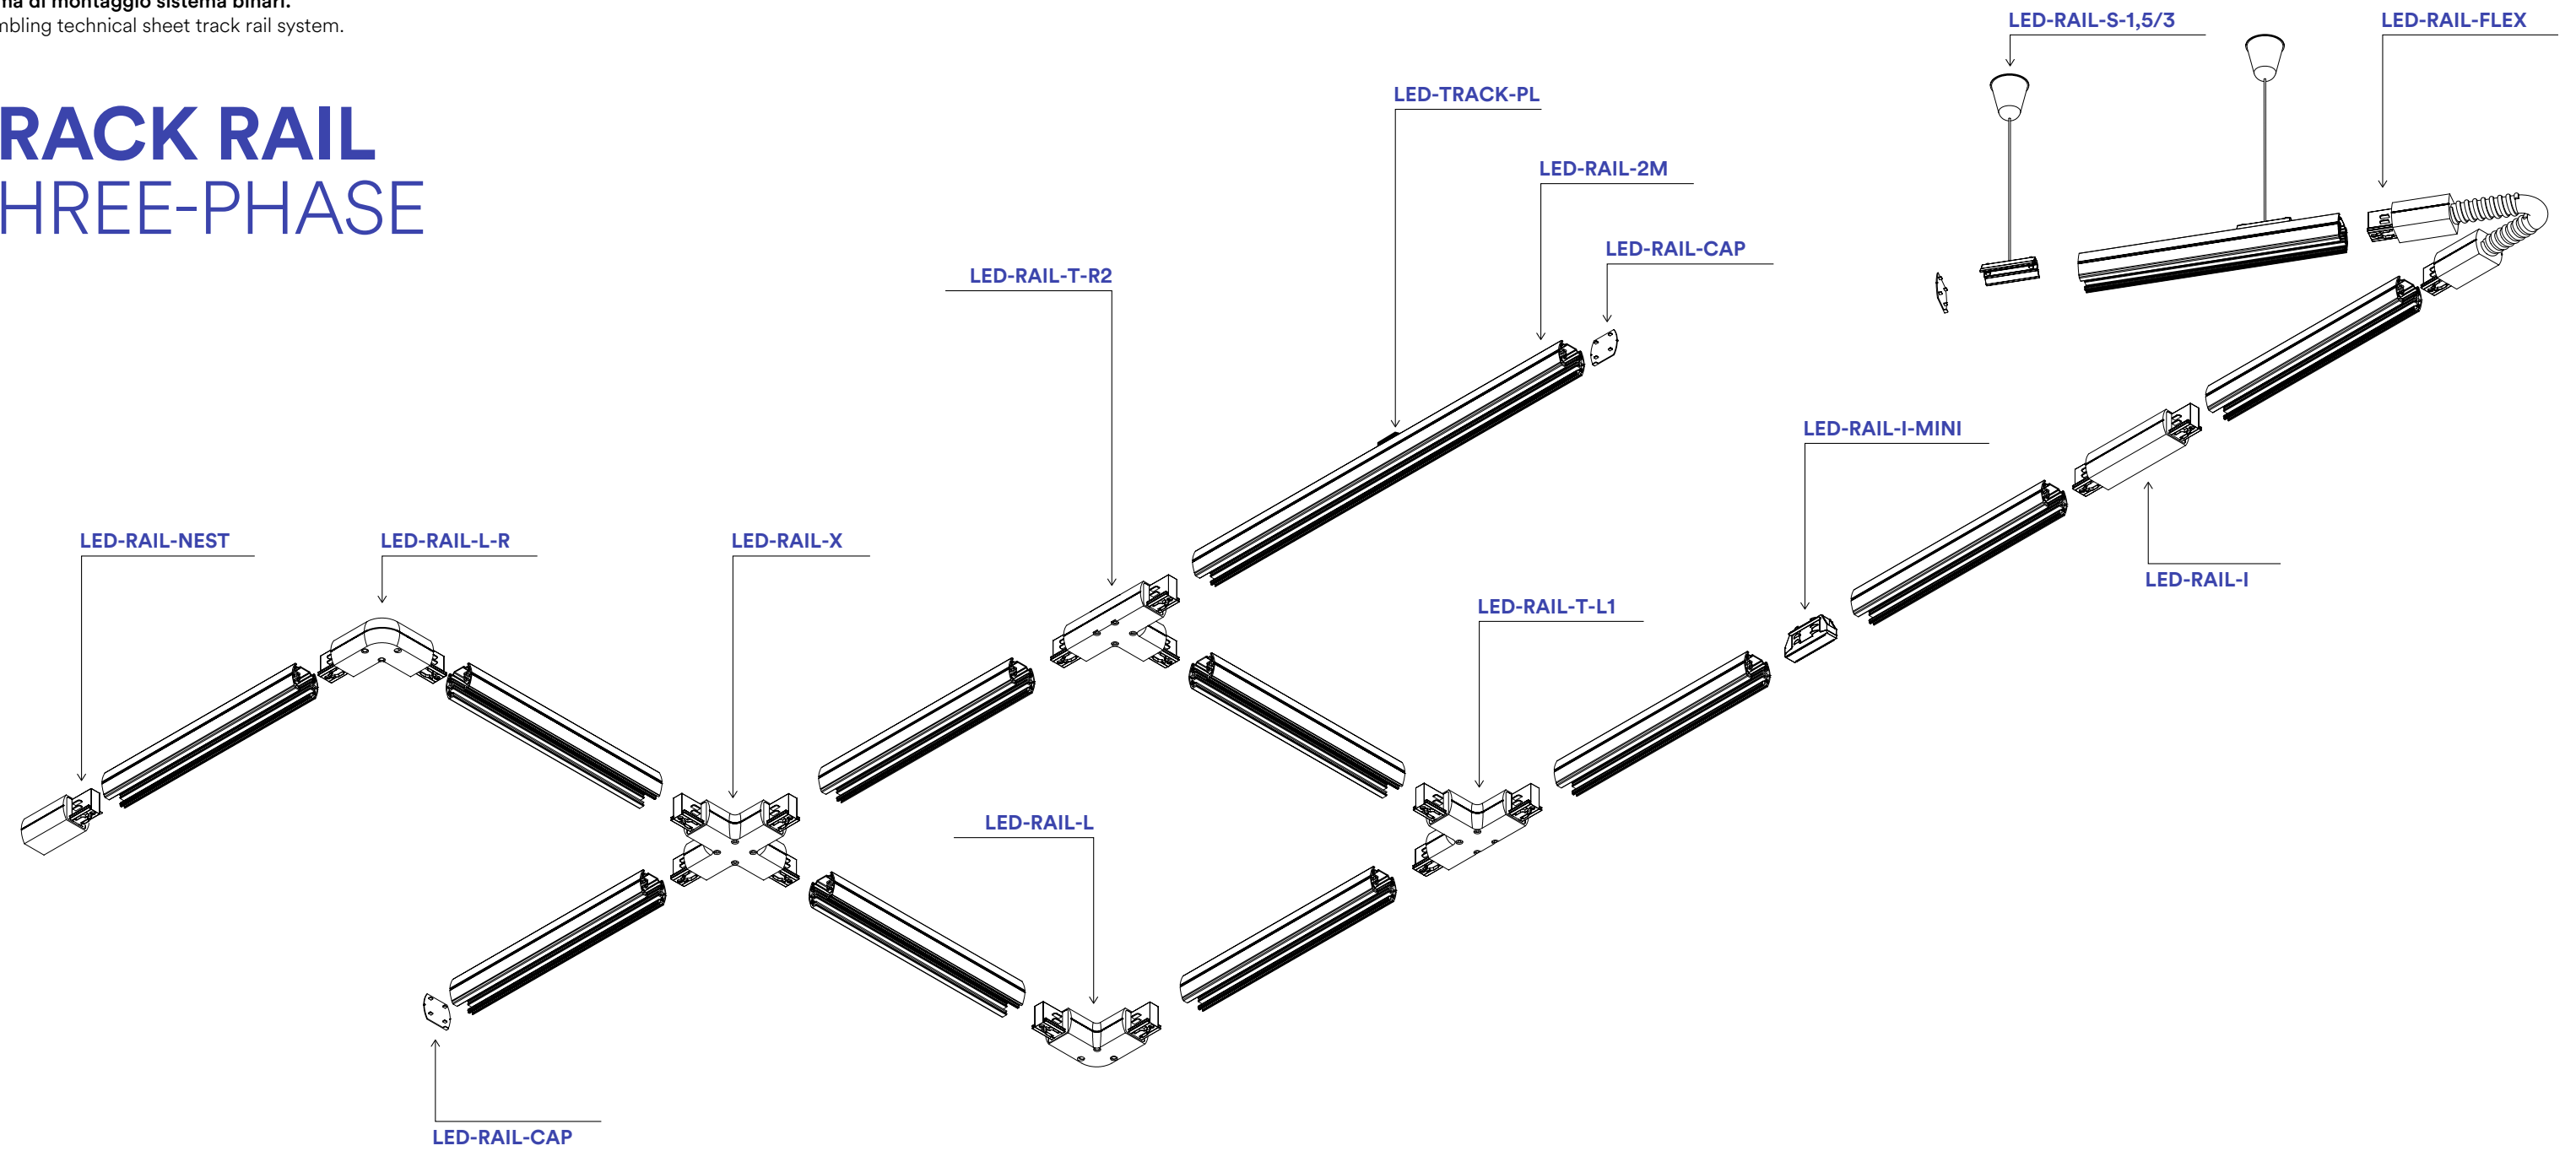

Trifase / Three-phase

# EXPLORER

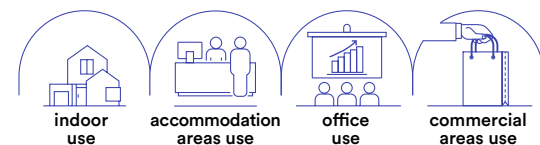

**Materiale**  
alluminio

**Colore**

bianco opaco  
nero opaco



**Temperatura colore selezionabile**

3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**

matt white  
matt black




**Selectable color temperature**  
3000K / 4000K



**Driver**  
included

**Faro a binario in alluminio con adattatore trifase e angolo di luce regolabile.**  
Aluminum track light with three-phase adapter and adjustable light angle.



Angolo di luce regolabile /  
Adjustable beam angle



**LED-EXPLORER-BCO**  
8031414923946

lumen


colour temp.



4800 lm


**LED-EXPLORER-NER**  
8031414923939

lumen




4800 lm

watt	30W
beam angle	15°- 55°
pf	0.90



LED-EXPLORER



SISTEMA BINARI / TRACK LIGHTS

In.tec light

Trifase / Three-phase

# PLANE

Proiettore a binario in alluminio con adattatore trifase.

Aluminum track spotlight with three-phase adapter.

**Materiale**

corpo in alluminio pressofuso

**Colore**

bianco opaco  
nero opaco



**Temperatura colore**

3000K / 4000K



**Driver**

incluso

**Material**

aluminum  
die cast body

**Colour**

matt white  
matt black



**Colour temperature**

3000K / 4000K



**Driver**


included




technical information **PLANE**




	colour temp.	colour
<b>LED-PLANE-W-20C</b> 8031414924714		
lumen	2400 lm	
<b>LED-PLANE-W-20M</b> 8031414924721		
lumen	2400 lm	
<b>LED-PLANE-B-20C</b> 8031414924691		
lumen	2400 lm	
<b>LED-PLANE-B-20M</b> 8031414924707		
lumen	2400 lm	
watt	20W	
beam angle	38°	






	colour temp.	colour
<b>LED-PLANE-W-30C</b> 8031414924752		
lumen	3600 lm	
<b>LED-PLANE-W-30M</b> 8031414924769		
lumen	3600 lm	
<b>LED-PLANE-B-30C</b> 8031414924738		
lumen	3600 lm	
<b>LED-PLANE-B-30M</b> 8031414924745		
lumen	3600 lm	
watt	30W	
beam angle	38°	



	colour temp.	colour
<b>LED-PLANE-W-40C</b> 8031414924790		
lumen	4800 lm	
<b>LED-PLANE-W-40M</b> 8031414924806		
lumen	4800 lm	
<b>LED-PLANE-B-40C</b> 8031414924776		
lumen	4800 lm	
<b>LED-PLANE-B-40M</b> 8031414924783		
lumen	4800 lm	
watt	40W	
beam angle	38°	



Fotometria del prodotto / Photometric curve




SISTEMA BINARI / TRACK LIGHTS  
In.tec light

Trifase / Three-phase

# JET ALTO LUMEN

Proiettore a binario in alluminio con adattatore trifase.  
Aluminum track spotlight with three-phase adapter.

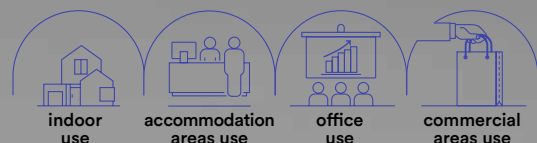

**Materiale**

corpo in alluminio pressofuso

**Colore**

bianco opaco  
nero opaco



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**

incluso

**Material**

aluminum die cast body

**Colour**

matt white  
matt black





**Selectable color temperature**  
3000K / 4000K



**Driver**


included




technical information **JET ALTO LUMEN**




	colour temp.	colour
<b>LED-JET-W-20HL</b> 8031414924110		
lumen	4000 lm	
<b>LED-JET-B-20HL</b> 8031414924080		
lumen	4000 lm	
watt	20W	
beam angle	38°	
pf	0.90	



	colour temp.	colour
<b>LED-JET-W-30HL</b> 8031414924127		
lumen	6000 lm	
<b>LED-JET-B-30HL</b> 8031414924097		
lumen	6000 lm	
watt	30W	
beam angle	38°	
pf	0.90	



	colour temp.	colour
<b>LED-JET-W-40HL</b> 8031414924134		
lumen	8000 lm	
<b>LED-JET-B-40HL</b> 8031414924103		
lumen	8000 lm	
watt	40W	
beam angle	38°	
pf	0.90	



Accessori non inclusi / Not included accessories

Retina antiabbagliamento /  
Anti-glare retina




<b>LED-JET-MESH60</b> 8031414924073	for 20W
<b>LED-JET-MESH70</b> 8031414924066	for 30W
<b>LED-JET-MESH80</b> 8031414924059	for 40W

Deviatore flusso luminoso /  
Luminous flux diverter



<b>LED-JET-DIFF60</b> 8031414924042	for 20W
<b>LED-JET-DIFF70</b> 8031414924035	for 30W
<b>LED-JET-DIFF80</b> 8031414924028	for 40W

Fotometria del prodotto / Photometric curve

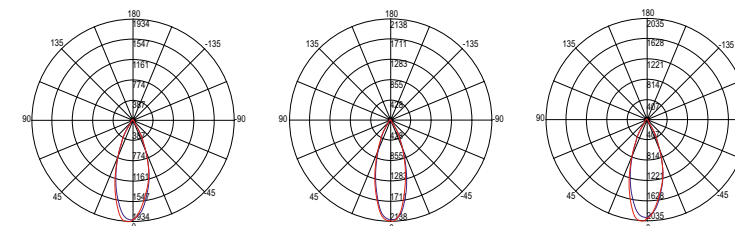


LED-JET ALTO LUMEN 20W    LED-JET ALTO LUMEN 30W    LED-JET ALTO LUMEN 40W

Trifase / Three-phase

# JET

Proiettore a binario in alluminio con adattatore trifase.  
Aluminum track spotlight with three-phase adapter.



technical information JET



**Materiale**  
alluminio

**Colore**  
bianco opaco  
nero opaco



**Temperatura colore selezionabile**  
3000K / 4000K / 6500K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
matt white  
matt black



**Selectable color temperature**  
3000K / 4000K / 6500K




**Driver**  
included




LED-JET-W-20DA		LED-JET-B-20DA	
8031414923755	4000 lm	8031414923724	4000 lm
watt	20W	watt	20W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90

LED-JET-W-20		LED-JET-B-20	
8031414893805	2100 lm	8031414893775	2100 lm
watt	20W	watt	20W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90




LED-JET-W-30DA		LED-JET-B-30	
8031414923762	6000 lm	8031414923731	6000 lm
watt	30W	watt	30W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90

LED-JET-W-30		LED-JET-B-30	
8031414893812	3235 lm	8031414893782	3235 lm
watt	30W	watt	30W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90






LED-JET-W-40DA		LED-JET-B-40DA	
8031414923779	8000 lm	8031414923748	8000 lm
watt	40W	watt	40W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90

LED-JET-W-40		LED-JET-B-40	
8031414893829	4300 lm	8031414893799	4300 lm
watt	40W	watt	40W
beam angle	38°	beam angle	38°
pf	0.90	pf	0.90



Fotometria del prodotto / Photometric curve




SISTEMA BINARI / TRACK LIGHTS

In.tec light


Trifase / Three-phase

# JET FOOD

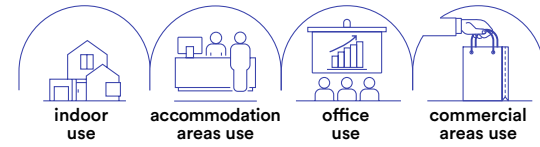


Trifase / Three-phase

# OBOE

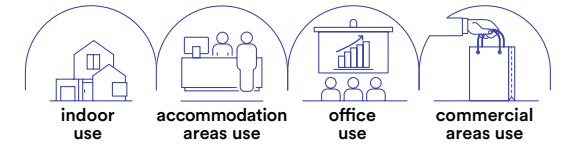

- Materiale**  
corpo in alluminio pressofuso
- Colore**  
bianco opaco  
nero opaco
- Temperatura colore**  
2500K / 3000K / 3100K
- Driver**  
integrato
- Material**  
aluminum die cast body
- Colour**  
matt white  
matt black
- Colour temperature**  
2500K / 3000K / 3100K
- Driver**  
built-in

**Proiettore a binario in alluminio pressofuso con adattatore trifase per l'illuminazione di generi alimentari.**  
Die-cast aluminum track projector with three-phase adapter for food lighting.






illuminazione per generi alimentari / Food lighting

	colour temp.	K	CRI	colour
<b>LED-JET-W-30BR</b> 8031414924189				
<b>LED-JET-B-30BR</b> 8031414924141				
lumen 4800 lm 2550 K >90				
<b>LED-JET-W-30RM</b> 8031414924196				
<b>LED-JET-B-30RM</b> 8031414924158				
lumen 4800 lm 3100 K >70				
<b>LED-JET-W-30FM</b> 8031414924202				
<b>LED-JET-B-30FM</b> 8031414924165				
lumen 4800 lm 3000 K >63				
<b>LED-JET-W-30FR</b> 8031414924219				
<b>LED-JET-B-30FR</b> 8031414924172				
lumen 4800 lm 3000 K >93				
watt				30W
beam angle				38°
pf				0.90

- Materiale**  
corpo in alluminio pressofuso
- Colore**  
bianco  
nero  
cromo  
oro  
bronzo
- Temperatura colore**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum die cast body
- Colour**  
white  
black  
chrome  
gold  
bronze
- Colour temperature**  
3000K / 4000K
- Driver**  
built-in

**Sospensione in alluminio pressofuso con adattatore trifase.**  
Die-cast aluminum suspension with three-phase adapter.



	colour temp.	colour
<b>LED-OBOE-SC BCO</b> 8031414865109		
<b>LED-OBOE-SM BCO</b> 8031414862047		
lumen 240 lm		
<b>LED-OBOE-SC NERO</b> 8031414865147		
<b>LED-OBOE-SM NERO</b> 8031414862030		
lumen 240 lm		
<b>LED-OBOE-SC CR</b> 8031414865130		
<b>LED-OBOE-SM CR</b> 8031414862061		
lumen 240 lm		
<b>LED-OBOE-SC ORO</b> 8031414865123		
<b>LED-OBOE-SM ORO</b> 8031414862054		
lumen 240 lm		
<b>LED-OBOE-SC BRO</b> 8031414865116		
<b>LED-OBOE-SM BRO</b> 8031414864287		
lumen 240 lm		
watt	3,5W	
beam angle	40°	


SISTEMA BINARI / TRACK LIGHTS

In.tec light



Trifase / Three-phase

# ROCKET

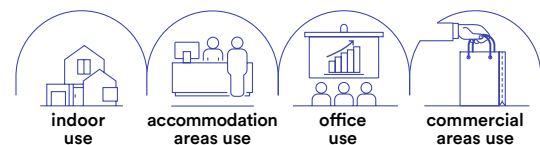

**Materiale**  
corpo in alluminio pressofuso

**Colore**  
bianco opaco  
nero opaco  
cromo  
oro  
bronzo



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminum  
die cast body


**Colour**  
matt white  
matt black  
chrome  
gold  
bronze




**Selectable color temperature**  
3000K / 4000K



**Driver**  
built-in




LED-ROCKET-7



**Proiettore a binario con luce spot in alluminio pressofuso con adattatore trifase.**


Track headlamp with spot light in die-cast aluminum with three-phase adapter.



**LED-ROCKET-BCO**

8031414923953

lumen




980 lm

**LED-ROCKET-NER**

8031414923984

lumen




980 lm

**LED-ROCKET-CR**

8031414923977

lumen




980 lm

**LED-ROCKET-ORO**

8031414923991

lumen




980 lm

**LED-ROCKET-BRO**

8031414923960

lumen




980 lm

watt 7W  
beam angle 38°

Trifase / Three-phase

# ROCKET

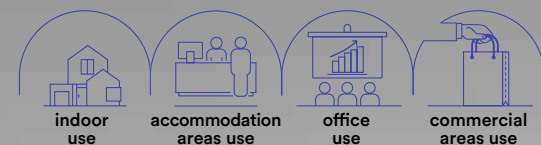

**Spot applique.**  
Wall spot light.

**Materiale**  
corpo in alluminio pressofuso

**Colore**  
bianco opaco  
nero opaco



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminum  
die cast body

**Colour**  
matt white  
matt black



**Selectable color temperature**  
3000K / 4000K




**Driver**  
built-in



**LED-ROCKET-AP-BCO**

8031414924004

lumen




980 lm

**LED-ROCKET-AP-NER**


8031414924011

lumen



980 lm

watt 7W  
beam angle 38°



LED-ROCKET-APC



SISTEMA BINARI / TRACK LIGHTS

In.tec light

Trifase / Three-phase

# SQUIB

Proiettore a binario in alluminio con adattatore trifase.  
Aluminum track headlamp with three-phase adapter.



**Materiale**  
alluminio

**Colore**  
bianco satinato  
nero satinato  
oro satinato



**Material**  
aluminum

**Colour**  
satin white  
satin black  
satin gold



**I-SQUIB-BCO**

8031414883226

**I-SQUIB-NER**


8031414883233

**I-SQUIB-ORO**

8031414895397

1 x GU10 MAX 25W

colour



Trifase / Three-phase

# EXPRESS

Proiettore a binario in alluminio con adattatore trifase.  
Aluminum track headlamp with three-phase adapter.




**Materiale**  
metallo

**Colore**  
bianco satinato  
nero satinato



**Material**  
metal

**Colour**  
satin white  
satin black

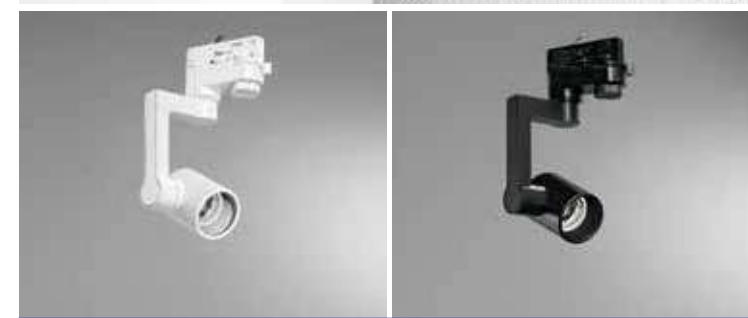

**LED-EXPRESS**


8031440360470

**LED-EXPRESS-B**

8031414864676

1 x E27 MAX 42W

colour



Lampadina  
non inclusa /  
Light bulb  
not included



Lampadina  
non inclusa /  
Light bulb  
not included

Trifase / Three-phase

# CLOCK

Proiettore a binario in alluminio con adattatore trifase.  
Aluminum track headlamp with three-phase adapter.

**Materiale**  
alluminio con cavo  
in tessuto nero


**Colore**  
cromo  
nero anodizzato

**Material**  
aluminum with black  
fabric cable

**Colour**  
chrome  
black anodized



**Sospensione in alluminio  
con adattatore trifase e  
cavo in tessuto nero.**  
Pendant lamp in aluminum  
with three-phase adaptor  
and black fabric cable.



**I-TRACK-CLOCK-CR**

8031414864072

**I-TRACK-CLOCK-NERO**

8031414864096

1 x E27 MAX 60W


colour



Lampadina  
non inclusa /  
Light bulb  
not included




Portalampada  
incluso /  
Lampholder  
included

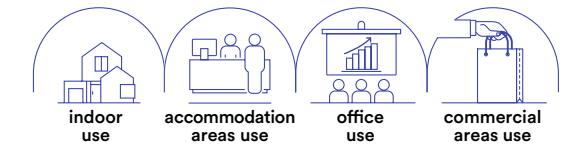

Trifase / Three-phase

# MAXWELL



**Materiale**  
alluminio

**Material**  
aluminum

**Colore**  
bianco  
nero

**Colour**  
white  
black



**Temperatura colore**  
3000K / 4000K

**Colour temperature**  
3000K / 4000K




**Driver**  
integrato

**Driver**  
built-in

**Durata e on/off**  
50.000h  
>25.000 on/off

**Life time and on/off**  
50.000h  
>25.000 on/off




technical information **MAXWELL**




**Lampada lineare in alluminio con adattatore trifase.**  
Linear aluminum lamp with three-phase adapter.



	colour temp.	colour
<b>MAXWELL-W-25C</b> 8031414884056	3300 K	White
lumen	3300 lm	
<b>MAXWELL-W-25M</b> 8031414884049	3300 K	White
lumen	3300 lm	
<b>MAXWELL-B-25C</b> 8031414884070	3300 K	Black
lumen	3300 lm	
<b>MAXWELL-B-25M</b> 8031414884063	3300 K	Black
lumen	3300 lm	

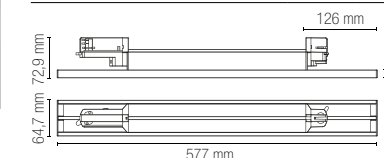


**Fotometria del prodotto / Photometric curve**




MAXWELL-25  
watt 25W  
beam angle 90°



	colour temp.	colour
<b>MAXWELL-W-48C</b> 8031414884018	6500 K	White
lumen	6500 lm	
<b>MAXWELL-W-48M</b> 8031414884001	6500 K	White
lumen	6500 lm	
<b>MAXWELL-B-48C</b> 8031414884032	6500 K	Black
lumen	6500 lm	
<b>MAXWELL-B-48M</b> 8031414884025	6500 K	Black
lumen	6500 lm	

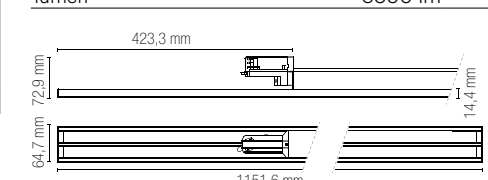


**Fotometria del prodotto / Photometric curve**




MAXWELL-48  
watt 48W  
beam angle 90°



**Interruttore per regolazione potenza / Power switchable:**  
48W - 44W - 40W - 34W  
130 LM/W



**Accessori non inclusi / Not included accessories**




**BUSMAX-LENS-25**  
8031414884117

Lente per doppio fascio luminoso 25° / Double lens 25°

Per i modelli **MAXWELL 25** occorrono 2 pezzi per l'intera lampada / 2 pieces need for the whole **MAXWELL 25** models

Per i modelli **MAXWELL 48** occorrono 4 pezzi per l'intera lampada / 4 pieces need for the whole **MAXWELL 48** models



**BUSMAX-LENS-RL**  
8031414884124

Lente fascio di luce asimmetrica 25° sx-dx / Asymmetric lens 25° sx-dx

Per i modelli **MAXWELL 25** occorrono 2 pezzi per l'intera lampada / 2 pieces need for the whole **MAXWELL 25** models

Per i modelli **MAXWELL 48** occorrono 4 pezzi per l'intera lampada / 4 pieces need for the whole **MAXWELL 48** models

SISTEMA BINARI / TRACK LIGHTS


In.tec light

Trifase / Three-phase

# HELP TRACK

Lampade di emergenza LED in policarbonato per sistema binario trifase.

LED emergency lamps in polycarbonate for three-phase track system.

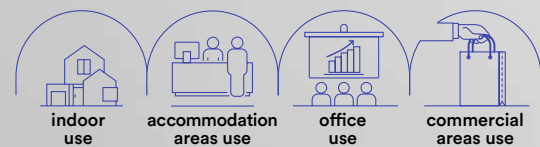

technical information **HELP TRACK**



**Materiale**  
policarbonato

**Colore**  
bianco  
nero



**Temperatura colore**  
4000K



**Material**  
polycarbonate

**Colour**  
white  
black



**Colour temperature**  
4000K




**LED-HELP-W-TRACK**

8031414884179

lumen

colour temp. | colour




250 lm

**LED-HELP-B-TRACK**

8031414884162

lumen



250 lm




watt

2W

beam angle

140°



**LiFePO4 3.2V 3200mAh**

Batteria per emergenza inclusa /  
Included emergency battery









SISTEMA BINARI / TRACK LIGHTS

In.tec light

# RAIL

**Binari ed accessori.**  
Track rail and components.

	<b>LED-RAIL-1M-BCO</b> 8031414917211	Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.	1 m track rail in white aluminum with three-phase adaptor and endcap included.
	<b>LED-RAIL-2M-BCO</b> 8031414917235	Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.	2 m track rail in white aluminum with three-phase adaptor and endcap included.
	<b>LED-RAIL-3M-BCO</b> 8031414917259	Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.	3 m track rail in white aluminum with three-phase adaptor and endcap included.
	<b>LED-RAIL-PL-BCO</b> 8031414925247	Kit 2 pz. Basette bianche per binario guida trifase.	Kit 2 pcs. white base for track rail three-phase.
	<b>LED-TRACK-BASE</b> 8031440361668	Base tonda bianca per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).	White round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).
	<b>LED-RAIL-CAP-BCO</b> 8031414917273	Tappo per binario trifase bianco.	White cap for three-phase track rail.
	<b>LED-TRACK-ADAT</b> 8031414866410	Adattatore bianco per binario trifase.	White adapt for three-phase track rail.
	<b>LED-RAIL-S-1,5-BCO</b> 8031414918034	Sistema sospensione 1,5 m per binari bianco.	White suspension 1,5 m for track rail.
	<b>LED-RAIL-S-3-BCO</b> 8031414917457	Sistema sospensione 3 m per binari bianco.	White suspension 3 m for track rail.
























	<b>LED-RAIL-1M-NER</b> 8031414917228	Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.	1 m track rail in black aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-2M-NER</b> 8031414917242	Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.	2 m track rail in black aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-3M-NER</b> 8031414917266	Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.	3 m track rail in black aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-PL-NER</b> 8031414925254	Kit 2 pz. basette nere per binario guida trifase.	Kit 2 pcs. black base for track rail three-phase.	
	<b>LED-TRACK-BASE NERO</b> 8031440361675	Base tonda nera per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).	Black round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).	
	<b>LED-RAIL-CAP-NER</b> 8031414917280	Tappo per binario trifase nero.	Black cap for three-phase track rail.	
	<b>LED-TRACK-ADAT NERO</b> 8031414866397	Adattatore nero per binario trifase.	Black adapt for three-phase track rail.	
	<b>LED-RAIL-S-1,5-NER</b> 8031414917440	Sistema sospensione 1,5 m per binari nero.	Black suspension 1,5 m for track rail.	
	<b>LED-RAIL-S-3-NER</b> 8031414917464	Sistema sospensione 3 m per binari nero.	Black suspension 3 m for track rail.	

# RAIL

## Binari ed accessori.

Track rail and components.

	<b>LED-RAIL-I-MINI-BCO</b> 8031414917938	Connettore lineare mini bianco a scomparsa per sistema binari trifase.	White mini invisible connector for three-phase track rail system.	
	<b>LED-RAIL-NEST-SX-BCO</b> 8031414917990	Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.	White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	<b>LED-RAIL-NEST-DX-BCO</b> 8031414918010	Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.	White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	<b>LED-RAIL-I-BCO</b> 8031414917914	Connettore bianco lineare per binari sistema trifase.	White straight connector for three-phase track rail system.	
	<b>LED-RAIL-FLEX-BCO</b> 8031414917891	Connettore bianco flessibile per sistema trifase.	White flexible power connector for three-phase track rail system.	
	<b>LED-RAIL-X-BCO</b> 8031414917556	Connettore a croce bianco per sistema trifase.	White cross connector for three-phase system.	
	<b>LED-RAIL-L-DX-BCO</b> 8031414917976	Connettore bianco track destro a L per binari guida trifase.	White L connector right side for three-phase track rail system.	
	<b>LED-RAIL-L-SX-BCO</b> 8031414917952	Connettore bianco track sinistro a L per binari guida trifase.	White L connector left side for three-phase track rail system.	

	<b>LED-RAIL-I-MINI-NER</b> 8031414917945	Connettore lineare mini nero a scomparsa per sistema binari trifase.	Black mini invisible connector for three phase track rail system.	
	<b>LED-RAIL-NEST-SX-NER</b> 8031414918003	Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.	Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.	 
	<b>LED-RAIL-NEST-DX-NER</b> 8031414918027	Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.	Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.	 
	<b>LED-RAIL-I-NER</b> 8031414917921	Connettore nero lineare per binari sistema trifase.	Black straight connector for three-phase track rail system.	 
	<b>LED-RAIL-FLEX-NER</b> 8031414917907	Connettore nero flessibile per sistema trifase.	Black flexible power connector for three-phase track rail system.	 
	<b>LED-RAIL-X-NER</b> 8031414917563	Connettore a croce nero per sistema trifase.	Black cross connector for three-phase system.	 
	<b>LED-RAIL-L-DX-NER</b> 8031414917983	Connettore nero track destro a L per binari guida trifase.	Black L connector right side for three-phase track rail system.	 
	<b>LED-RAIL-L-SX-NER</b> 8031414917969	Connettore nero track sinistro a L per binari guida trifase.	Black L connector left side for three-phase track rail system.	 

# RAIL

## Binari ed accessori.

Track rail and components.



### LED-RAIL-T-DX1-BCO 8031414917518

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-SX1-BCO 8031414917495

Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left white T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-DX2-BCO 8031414917532

Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-SX2-BCO 8031414917471

Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.

White T connector for L N input guide rails + ground cable for three-phase circuit.



### LED-RAIL-T-DX1-NER 8031414917525

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right black T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-SX1-NER 8031414917501

Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left black T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-DX2-NER 8031414917549

Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.





Right black T connector for L N input guide rails + ground cable for three-phase system.



### LED-RAIL-T-SX2-NER 8031414917488













Connettore nero a T per binari guida entrata L N + cavo di terra per circuito trifase.


















Black T connector for L N input guide rails + ground cable for three-phase circuit.



# RAIL

**Binari ed accessori.**  
Track rail and components.

	<b>LED-RAIL-1M-DA-BCO</b> 8031414926169	Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.	1 m track rail in white aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-2M-DA-BCO</b> 8031414926183	Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.	2 m track rail in white aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-3M-DA-BCO</b> 8031414926206	Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.	3 m track rail in white aluminum with three-phase adaptor and endcap included.	
	<b>LED-RAIL-PL-DA-BCO</b> 8031414926428	Kit 2 pz. Basette bianche per binario guida trifase.	Kit 2 pcs. white base for track rail three-phase.	
	<b>LED-RAIL-CAP-DA-BCO</b> 8031414926220	Tappo per binario trifase bianco.	White cap for three-phase track rail.	
	<b>LED-RAIL-S-1,5-DA-BCO</b> 8031414926381	Sistema sospensione 1,5 m per binari bianco.	White suspension 1,5 m for track rail.	
	<b>LED-RAIL-S-3-DA-BCO</b> 8031414926404	Sistema sospensione 3 m per binari bianco.	White suspension 3 m for track rail.	












	<b>LED-RAIL-1M-DA-NER</b> 8031414926176	Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.	1 m track rail in black aluminum with three-phase adaptor and endcap included.		
	<b>LED-RAIL-2M-DA-NER</b> 8031414926190	Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.	2 m track rail in black aluminum with three-phase adaptor and endcap included.		
	<b>LED-RAIL-3M-DA-NER</b> 8031414926213	Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.	3 m track rail in black aluminum with three-phase adaptor and endcap included.		
	<b>LED-RAIL-PL-DA-NER</b> 8031414926435	Kit 2 pz. basette nere per binario guida trifase.	Kit 2 pcs. black base for track rail three-phase.		
	<b>LED-RAIL-CAP-DA-NER</b> 8031414926237	Tappo per binario trifase nero.	Black cap for three-phase track rail.		
	<b>LED-RAIL-S-1,5-DA-NER</b> 8031414926398	Sistema sospensione 1,5 m per binari nero.	Black suspension 1,5 m for track rail.		
	<b>LED-RAIL-S-3-DA-NER</b> 8031414926411	Sistema sospensione 3 m per binari nero.	Black suspension 3 m for track rail.		



# RAIL

## Binari ed accessori.

Track rail and components.






	<b>LED-RAIL-I-MINI-DA-BCO</b> 8031414926282		Connettore lineare mini bianco a scomparsa per sistema binari trifase.	White mini invisible connector for three-phase track rail system.
	<b>LED-RAIL-NEST-SX-DA-BCO</b> 8031414926343		Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.	White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.
	<b>LED-RAIL-NEST-DX-DA-BCO</b> 8031414926367		Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.	White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.
	<b>LED-RAIL-I-DA-BCO</b> 8031414926268		Connettore bianco lineare per binari sistema trifase.	White straight connector for three-phase track rail system.
	<b>LED-RAIL-FLEX-DA-BCO</b> 8031414926244		Connettore bianco flessibile per sistema trifase.	White flexible power connector for three-phase track rail system.
	<b>LED-RAIL-X-DA-BCO</b> 8031414926527		Connettore a croce bianco per sistema trifase.	White cross connector for three-phase system.
	<b>LED-RAIL-L-DX-DA-BCO</b> 8031414926329		Connettore bianco track destro a L per binari guida trifase.	White L connector right side for three-phase track rail system.
	<b>LED-RAIL-L-SX-DA-BCO</b> 8031414926305		Connettore bianco track sinistro a L per binari guida trifase.	White L connector left side for three-phase track rail system.

	<b>LED-RAIL-I-MINI-DA-NER</b> 8031414926299		Connettore lineare mini nero a scomparsa per sistema binari trifase.	Black mini invisible connector for three phase track rail system.	
	<b>LED-RAIL-NEST-SX-DA-NER</b> 8031414926350		Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.	Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	<b>LED-RAIL-NEST-DX-DA-NER</b> 8031414926374		Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.	Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	<b>LED-RAIL-I-DA-NER</b> 8031414926275		Connettore nero lineare per binari sistema trifase.	Black straight connector for three-phase track rail system.	
	<b>LED-RAIL-FLEX-DA-NER</b> 8031414926251		Connettore nero flessibile per sistema trifase.	Black flexible power connector for three-phase track rail system.	
	<b>LED-RAIL-X-DA-NER</b> 8031414926534		Connettore a croce nero per sistema trifase.	Black cross connector for three-phase system.	
	<b>LED-RAIL-L-DX-DA-NER</b> 8031414926336		Connettore nero track destro a L per binari guida trifase.	Black L connector right side for three-phase track rail system.	
	<b>LED-RAIL-L-SX-DA-NER</b> 8031414926312		Connettore nero track sinistro a L per binari guida trifase.	Black L connector left side for three-phase track rail system.	





# RAIL

**Binari ed accessori.**

Track rail and components.











	<p><b>LED-RAIL-T-DX1-DA-BCO</b> 8031414926480</p> <p>Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Right white T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-SX1-DA-BCO</b> 8031414926466</p> <p>Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Left white T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-DX2-DA-BCO</b> 8031414926503</p> <p>Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Right white T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-SX2-DA-BCO</b> 8031414926442</p> <p>Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>White T connector for L N input guide rails + ground cable for three-phase circuit.</p>	

	<p><b>LED-RAIL-T-DX1-DA-NER</b> 8031414926497</p> <p>Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Right black T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-SX1-DA-NER</b> 8031414926473</p> <p>Connettore nero sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Left black T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-DX2-DA-NER</b> 8031414926510</p> <p>Connettore nero destro a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Right black T connector for L N input guide rails + ground cable for three-phase system.</p>	
	<p><b>LED-RAIL-T-SX2-DA-NER</b> 8031414926459</p> <p>Connettore nero a T per binari guida entrata L N + cavo di terra per circuito trifase.</p>	<p>Black T connector for L N input guide rails + ground cable for three-phase circuit.</p>	








# TRACK


**Binari ed accessori.**  
Track rail and components.

	<b>LED-TRACK-1M-INC</b> 8031440361804 Binario trifase ad incasso in alluminio bianco 1 m.	Recessed track light in white aluminum 1 m.	
	<b>LED-TRACK-2M-INC</b> 8031440361811 Binario trifase ad incasso in alluminio bianco 2 m.	Recessed track light in white aluminum 2 m.	
	<b>INC-TRACK-STAFFE</b> 8031414879700 Kit 2pz staffe zincate per binario incasso	Kit 2pcs metal bracket for recessed track rail	
	<b>INC-TRACK-NEST</b> 8031414871193 Innesto sinistro per binario ad incasso trifase bianco.	White recess power connector left side for three-phase track rail.	
	<b>INC-TRACK-NEST-R</b> 8031414871179 Innesto destro per binario ad incasso trifase bianco.	White recess power connector right side for three-phase track rail in back version.	
	<b>INC-TRACK-I</b> 8031414871254 Connettore bianco lineare ad incasso per binari trifase.	White recess straight connection for three-phase track rail system.	
	<b>INC-TRACK-L-R</b> 8031414871216 Connettore bianco ad incasso destro a L per binari trifase.	White recess L connector right side for three-phase track rail system.	
	<b>INC-TRACK-L</b> 8031414871230 Connettore bianco ad incasso sinistro a L per binari trifase.	White recess L connector left side for three-phase track rail system.	

	<b>LED-TRACK-1M-INC NERO</b> 8031414864836 Binario trifase ad incasso in alluminio nero 1 m.	Recessed track light in black aluminum 1 m.	
	<b>LED-TRACK-2M-INC NERO</b> 8031414864058 Binario trifase ad incasso nero in alluminio 2 m.	Recessed track light in black aluminum 2 m.	
	<b>INC-TRACK-STAFFE</b> 8031414879700 Kit 2pz staffe zincate per binario incasso	Kit 2pcs metal bracket for recessed track rail	
	<b>INC-TRACK-NEST NERO</b> 8031414871209 Innesto sinistro per binario ad incasso trifase nero.	Black recess power connector left side for three-phase track rail.	
	<b>INC-TRACK-NEST-R NERO</b> 8031414871186 Innesto destro per binario ad incasso trifase nero.	Black recess power connector right side for three-phase track rail in back version.	
	<b>INC-TRACK-I NERO</b> 8031414871261 Connettore nero lineare ad incasso per binari trifase.	Black recess straight connection for three-phase track rail system.	
	<b>INC-TRACK-L-R NERO</b> 8031414871223 Connettore nero ad incasso destro a L per binari trifase.	Black recess L connector right side for three-phase track rail system.	
	<b>INC-TRACK-L NERO</b> 8031414871247 Connettore nero ad incasso sinistro a L per binari trifase.	Black recess L connector left side for three-phase track rail system.	




# BUSBAR TRUNKING SYSTEM

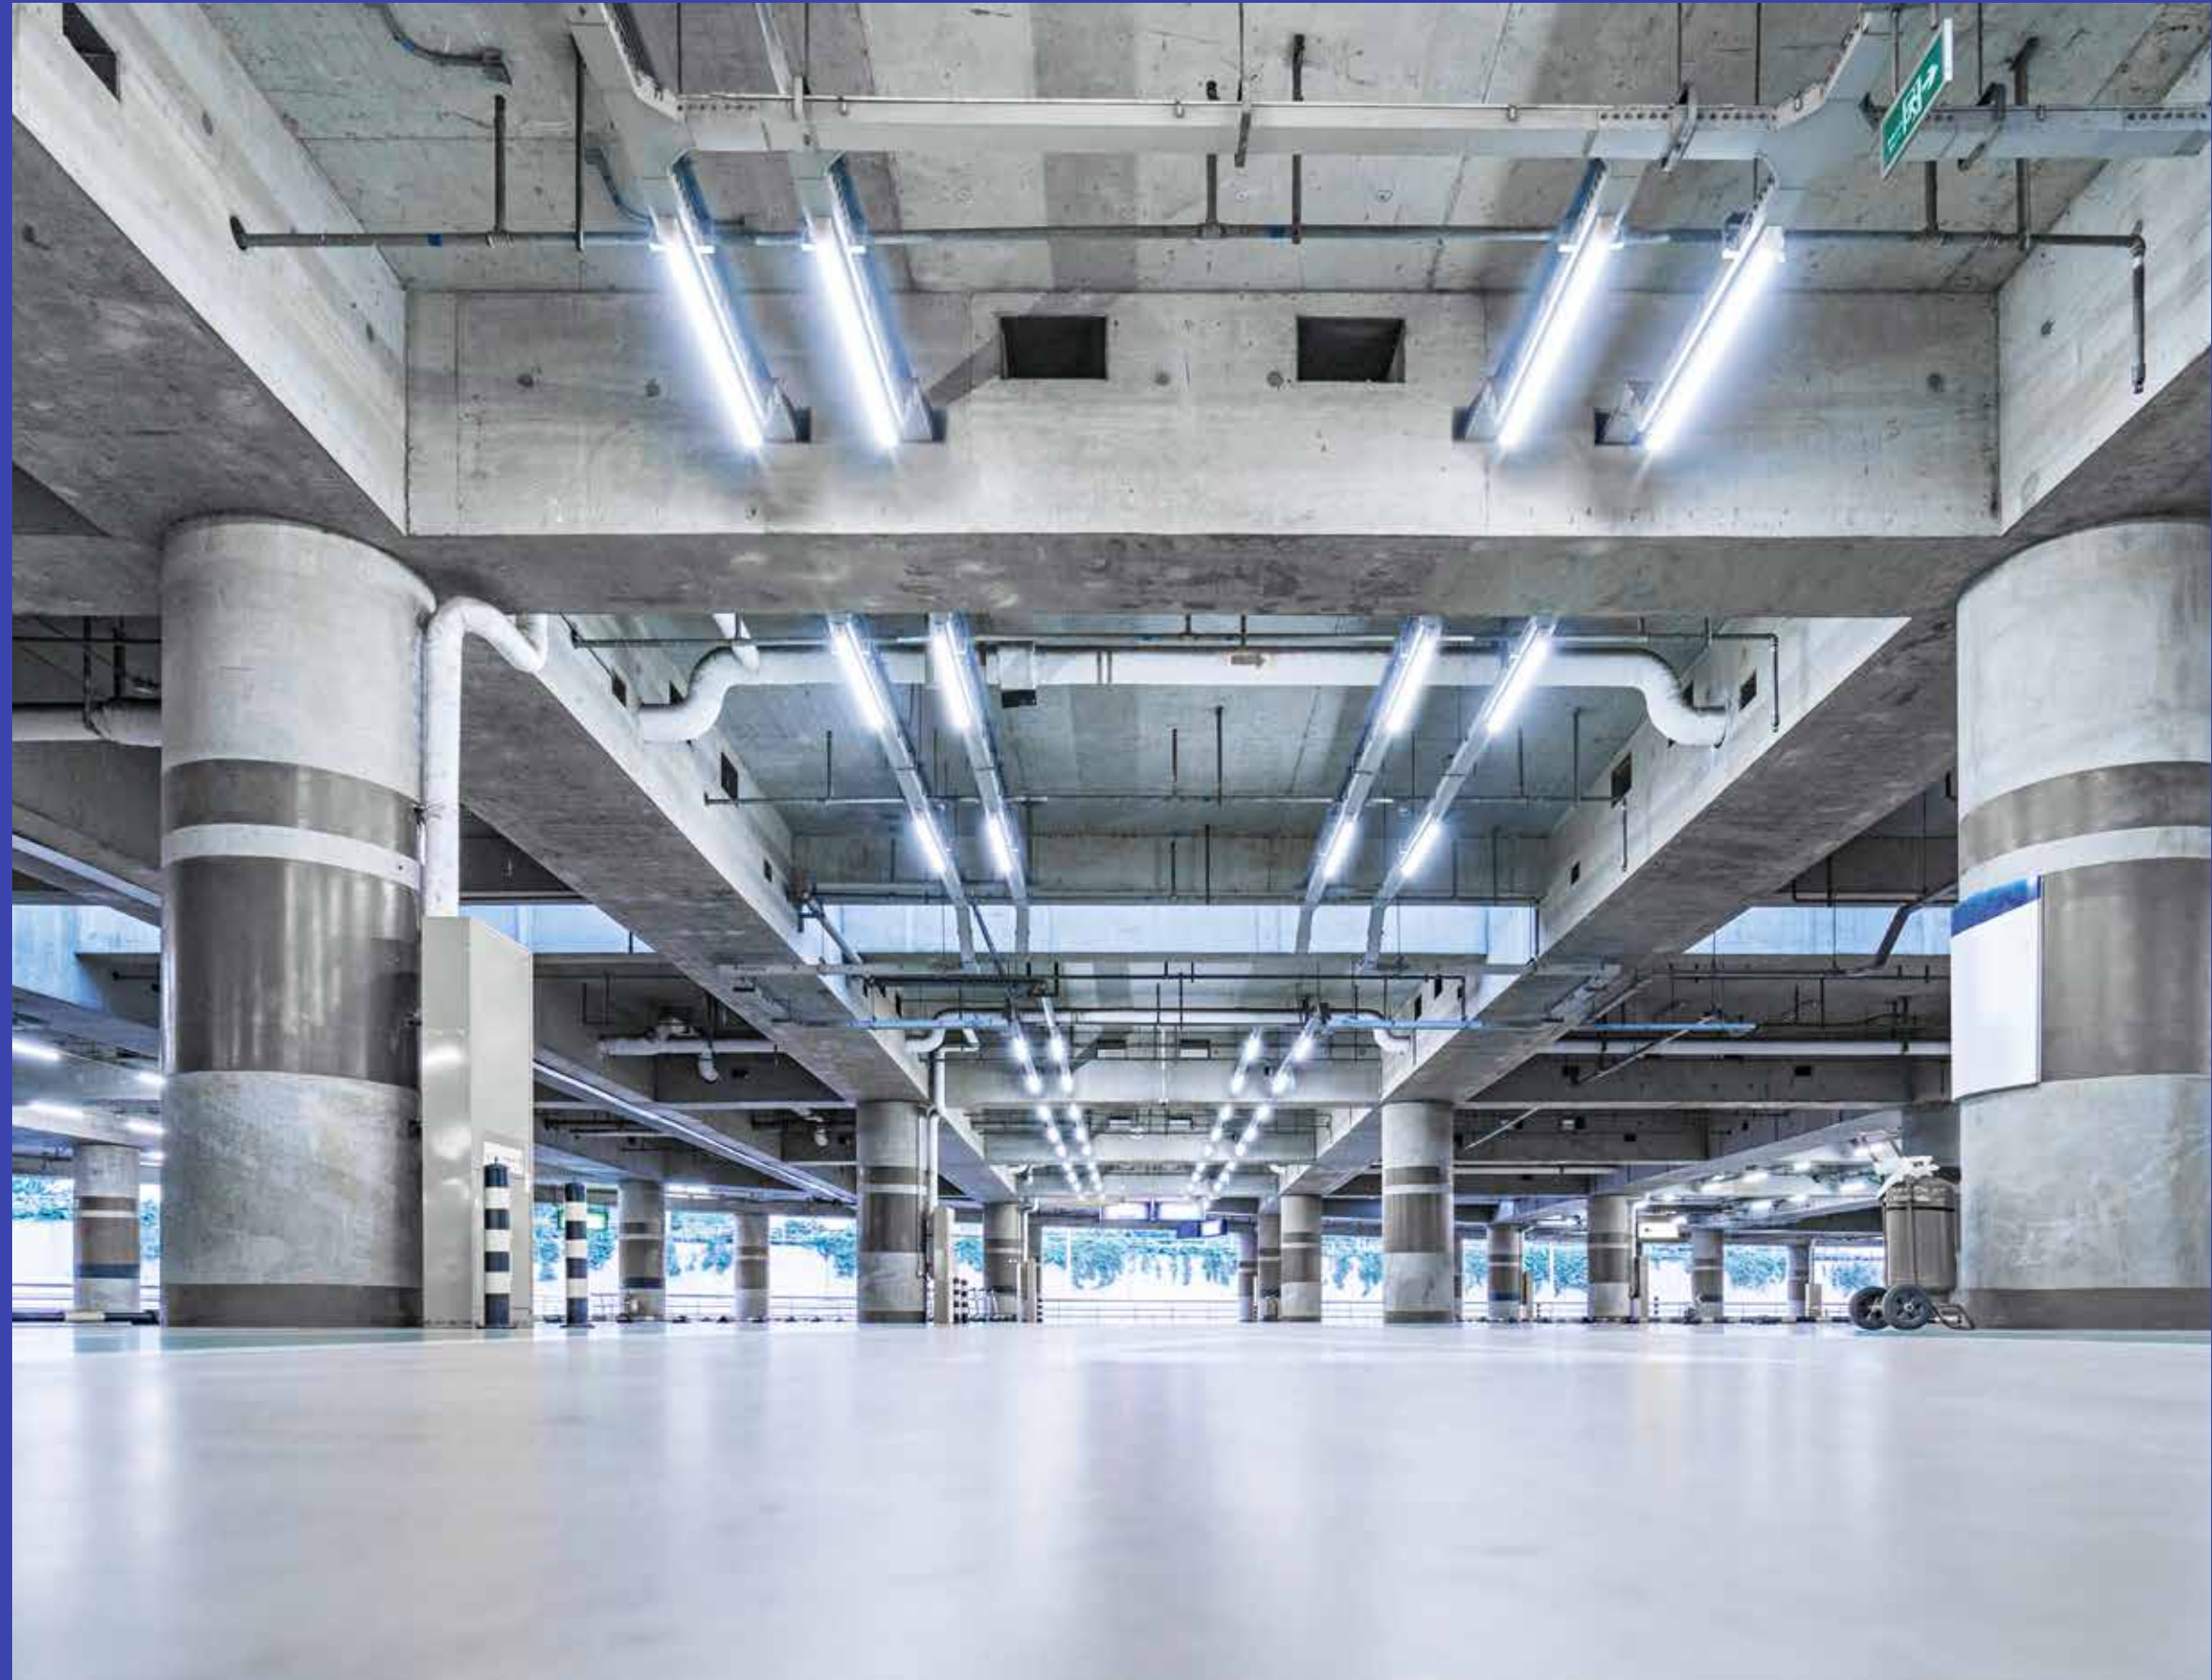


Schema di montaggio sistema binari.  
Assembling technical sheet track rail system.

# BUSBAR TRUNKING SYSTEM

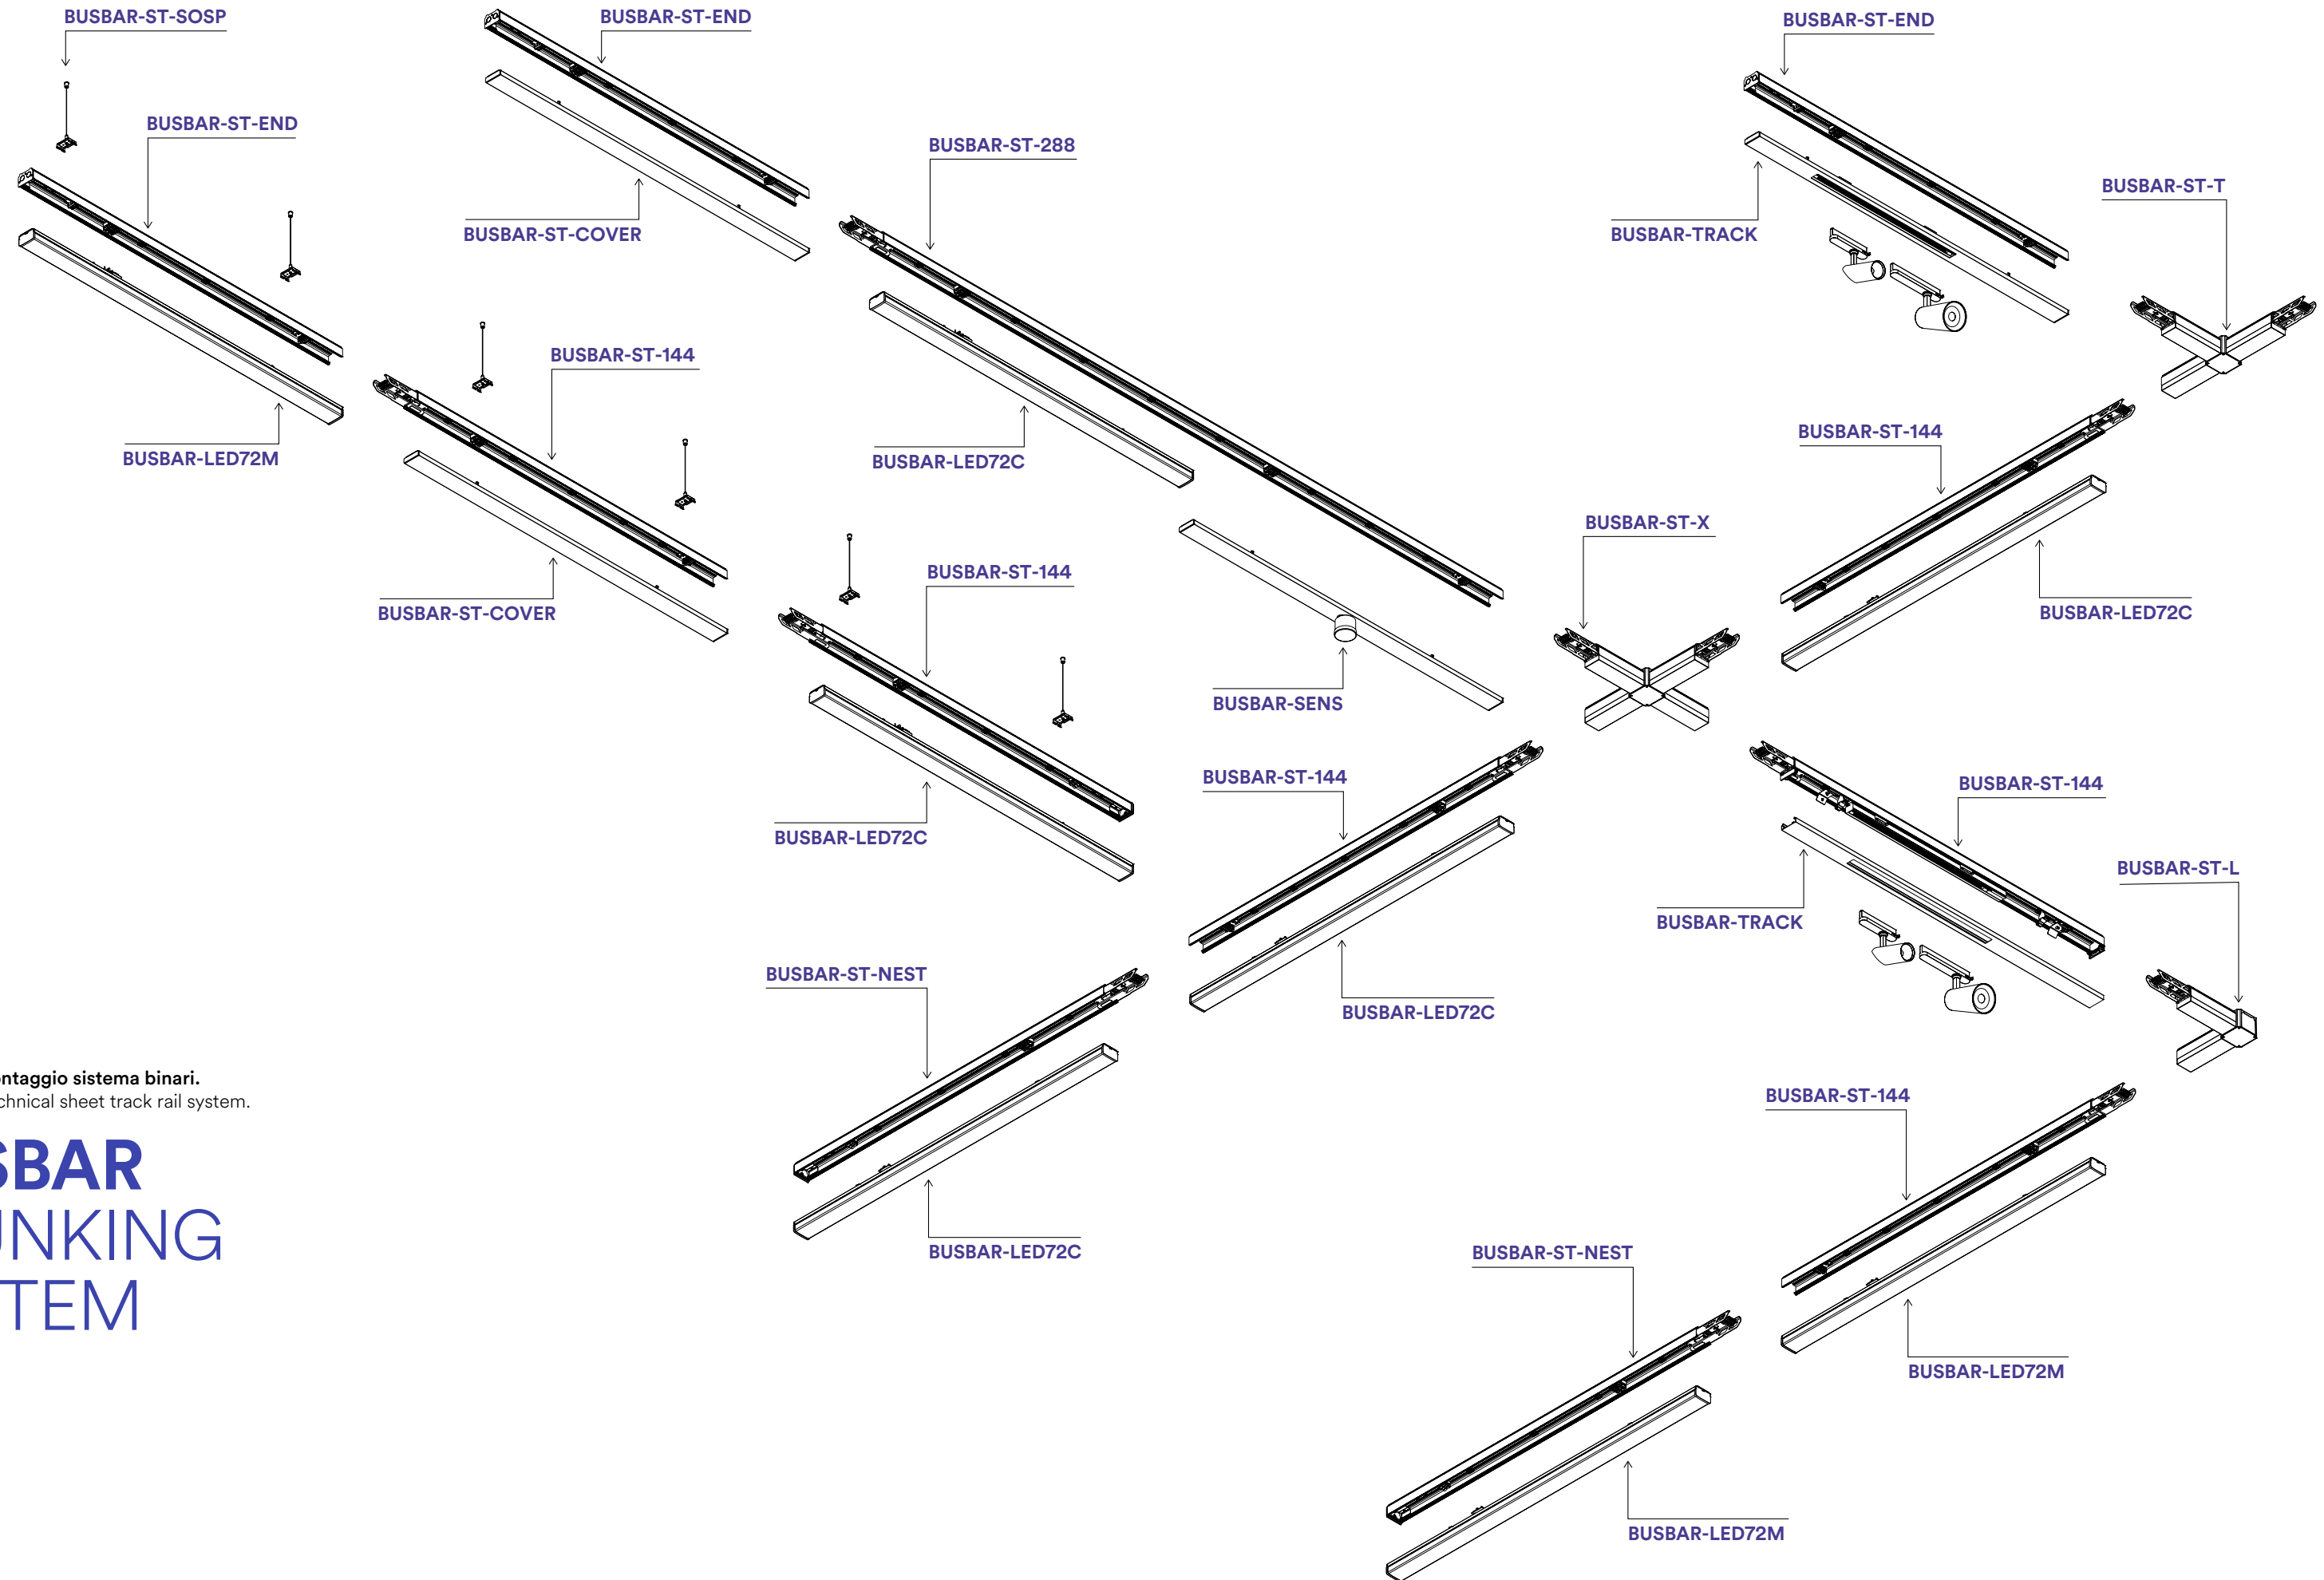

# BUSBAR


Sistema trunking lineare.  
Trunking linear system.



technical information **BUSBAR**



- Materiale**  
alluminio
- Colore**  
bianco
- Temperatura colore**  
3000K / 4000K
- Driver**  
integrato
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
aluminum
- Colour**  
white
- Colour temperature**  
3000K / 4000K
- Driver**  
built-in
- Life time and on/off**  
50.000h  
>25.000 on/off

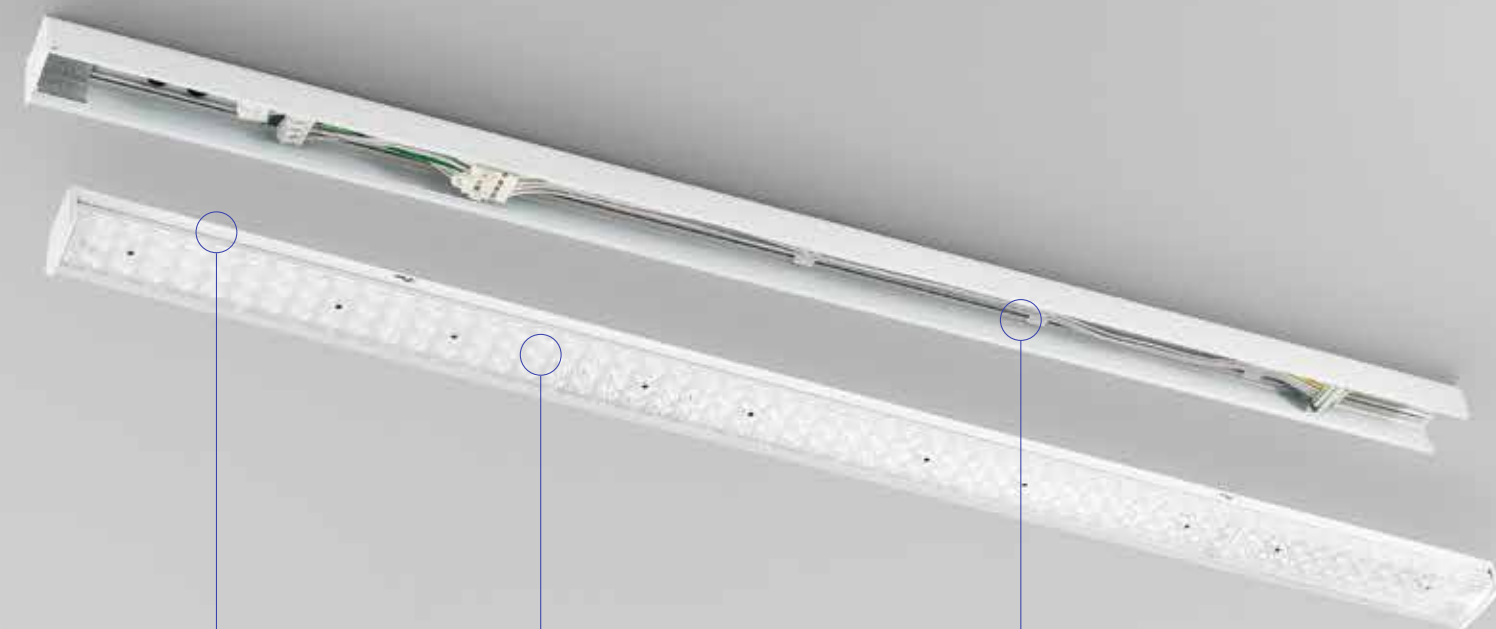

Antipolvere e antispruzzo /  
Dustproof and splashproof

Led rivestiti contro le influenze esterne /  
Coated LEDs against external influences

Montaggio senza attrezzi /  
Toolless mounting



Sistema di fissaggio a soffitto o a sospensione /  
Ceiling mount or pendant fixing system



Estensibile grazie ai moduli in 2 misure /  
Extendable thanks to the extruded aluminum modules



Sistema easy di aggancio binari /  
Track rail easy connection system




7 cavi L1 L2 L3 N E D+ D- trifase più dimmer /  
7 wire connection system L1 L2 L3 N E D+ D- three-phase + dimmer




Sistema easy di fissaggio della lampada /  
Lamp easy installation system


Lenti per diversi fasci di luce / Different beam angles optional lens



Lente inclusa /  
Included lens




**Lente opzionale**  
doppio fascio luminoso 25° /  
**Optional lens double lens 25°**



**Lente opzionale**  
fascio di luce asimmetrico 25° sx-dx /  
**Optional lens asymmetric lens 25° sx-dx**

# BUSBAR

Lampada lineare per sistema trunking.  
Linear lamp for trunking system.




technical information **BUSBAR**



- Materiale**  
alluminio
- Colore**  
bianco
- Temperatura colore**  
3000K / 4000K
- Driver**  
integrato
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
aluminum
- Colour**  
white
- Colour temperature**  
3000K / 4000K
- Driver**  
built-in
- Life time and on/off**  
50.000h  
>25.000 on/off



	colour temp.	colour		colour temp.	colour
<b>BUSBAR-LED72C</b> 8031414883936	9340 lm		<b>BUSBAR-LED72M-HELP</b> 8031414898367	9340 lm	
<b>BUSBAR-LED72M</b> 8031414883929	9340 lm				
watt		72W	emergency light		3 h - 600 lm
beam angle		90°	watt		4W
			beam angle		90°

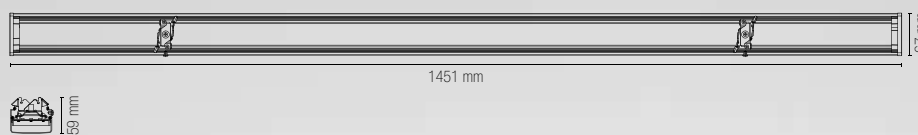


**Funzione MAINTAIN**  
sempre accesa /  
MAINTAIN  
function always on

**Funzione NON-MAINTAIN**  
emergenza /  
NON-MAINTAIN function  
only emergency


Compatibile con altri sistemi trunking in commercio / Compatible with other trunking systems



Fotometria del prodotto / Photometric curve




Accessori non inclusi / Not included accessories



**BUSMAX-LENS-25**  
8031414884117

Lente per doppio fascio luminoso 25° /  
Double lens 25°


Per tutta la lampada  
**BUSBAR** occorrono 5 pezzi /  
5 pieces need for the  
whole **BUSBAR** lamp



**BUSMAX-LENS-RL**  
8031414884124

Lente fascio di luce asimmetrica 25° sx-dx /  
Asymmetric lens 25° sx-dx

Per tutta la lampada  
**BUSBAR** occorrono 5 pezzi /  
5 pieces need for the  
whole **BUSBAR** lamp




# BUSBAR

**Sistema blindosbarra lineare per installazione a sospensione e plafoniera.**  
Busways linear system bar for suspended installation and ceiling light.


**BUSBAR-ST-NEST**  
8031414883943

Binario innesto  
7 cavi per  
alimentazione. Feed trunking  
with 7 input wire.




**BUSBAR-ST-END**  
8031414883950

Binario terminale  
7 cavi con sistema  
di connessione  
multipla. Terminal track  
rail 7 cables with  
multiple connection  
system.




**BUSBAR-ST-144**  
8031414883967

Binario  
intermedio 7 cavi  
da 145 cm. Intermediate  
trunking with 7  
wire of 145 cm.




**BUSBAR-ST-288**  
8031414883974

Binario  
intermedio 7 cavi  
da 290 cm. Intermediate  
trunking with 7  
wire of 290 cm.




**BUSBAR-ST-L**  
8031414884087

Connettore a L  
7 cavi. L connector  
with 7 wires.




**BUSBAR-ST-T**  
8031414884100

Connettore a T  
7 cavi. T connector  
with 7 wires.




**BUSBAR-ST-X**  
8031414884094

Connettore a X  
7 cavi. X connector  
with 7 wires.




**BUSBAR-ST-COVER**  
8031414883981

Cover di  
alluminio bianco. White  
aluminum cover.

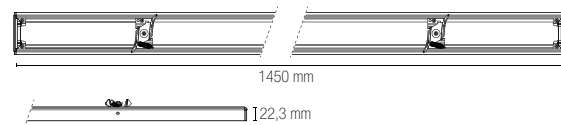

**BUSBAR-SENS**  
1 / function



In un ambiente sufficientemente  
luminoso la lampada non si accende  
anche se viene rilevato movimento.

With sufficient ambient light,  
the light will not be switched  
on even if with motion signal.



In un ambiente poco luminoso  
il sensore accende la lampada non  
appena viene rilevato un movimento.

With insufficient ambient light,  
the sensor switches on the light  
when motion is detected.



Trascorso il tempo di attesa,  
il sensore spegne la lampada quando  
non viene rilevato movimento.

After elapse of hold time, the  
sensor switches off the light  
when no motion is detected.

**BUSBAR-SENS**  
2 / function



Se non viene rilevato movimento  
la lampada rimane ad un  
basso livello di luminosità.

If there is motion detected,  
the light will be remained at  
a low light level all the time.



Quando viene rilevato movimento,  
il sensore porta la lampada  
al 100% di luminosità.


When motion is detected,  
the sensor will switch on the  
light to 100% brightness.



Trascorso il tempo di attesa, il sensore  
attenua la luce all'attuale livello di  
luminosità se non è rilevato movimento.

After elapse of hold time, the sensor  
dims the light at present low light  
level if no motion is detected.

**BUSBAR-SENS**  
3 / function



In un ambiente sufficientemente  
luminoso la lampada non si accende  
anche se viene rilevato movimento.

With sufficient ambient light,  
the light will not be switched  
on even if with motion signal.



In un ambiente poco luminoso il  
sensore accende la lampada non  
appena viene rilevato un movimento.

With insufficient ambient light,  
the sensor switches on the light  
when motion is detected.



Trascorso il tempo di attesa, il sensore  
attenua la luce all'attuale livello di  
luminosità se non è rilevato movimento.

After elapse of hold time, the sensor  
dims the light at present low light  
level if no motion is detected.




Trascorso il tempo di standby il  
sensore spegne la lampada se  
non è rilevato movimento.

After elapse of standby period,  
the sensor switches off the light  
if no motion is detected.

**BUSBAR-SENS**  
8031414884131

Cover elettrificata  
con sensore di  
movimento e  
crepuscolare da 3  
funzioni incluso.

Electrified cover with  
motion and  
crepuscular 3  
functions sensor.

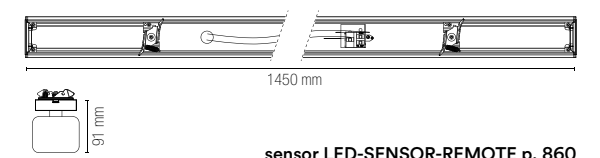


sensor LED-SENSOR-REMOTE p. 860

**BUSBAR-TRACK**  
8031414884148

Cover elettrificata  
con binario trifase.

Electrified cover  
with three phase  
track system.

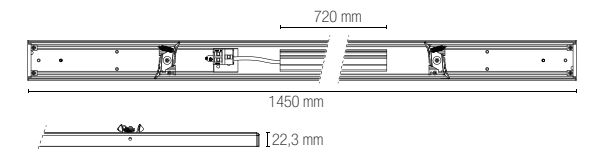

**BUSBAR-FIX**  
8031414884155

Kit 2 pz staffe  
per fissaggio  
a plafoniera.

Bracket kit 2 pcs  
for ceiling  
mounting.



**BUSBAR-ST-SOSP**  
8031414883998


Kit 2 pz cavi  
per binario  
a sospensione con  
cavo da 5 m.

Kit 2 pcs cables  
for suspension  
track with  
5 m cable.





# INDOOR

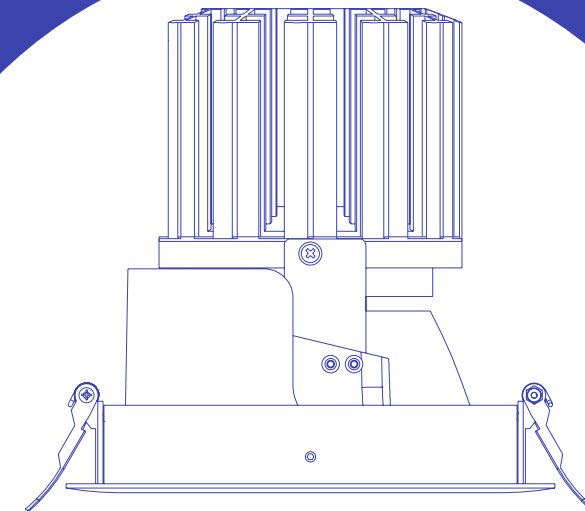


INCASSI  
RECESSED LAMPS

# APOLLO

Faretto ad incasso antiriflesso con struttura in alluminio e finitura con bordo bianco ed interno nero satinato. Luci spot con doppia orientabilità.

Anti-glare recessed spotlight with aluminum structure and finish with white border and satin black interior. Spot lights with double orientability.

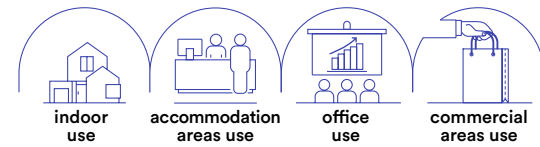

**Materiale**  
alluminio

**Colore**  
bordo bianco  
e interno  
nero satinato



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum


**Colour**  
body with white  
edge and  
satin black internal




**Colour temperature**  
3000K / 4000K



**Driver**  
included




collection APOLLO

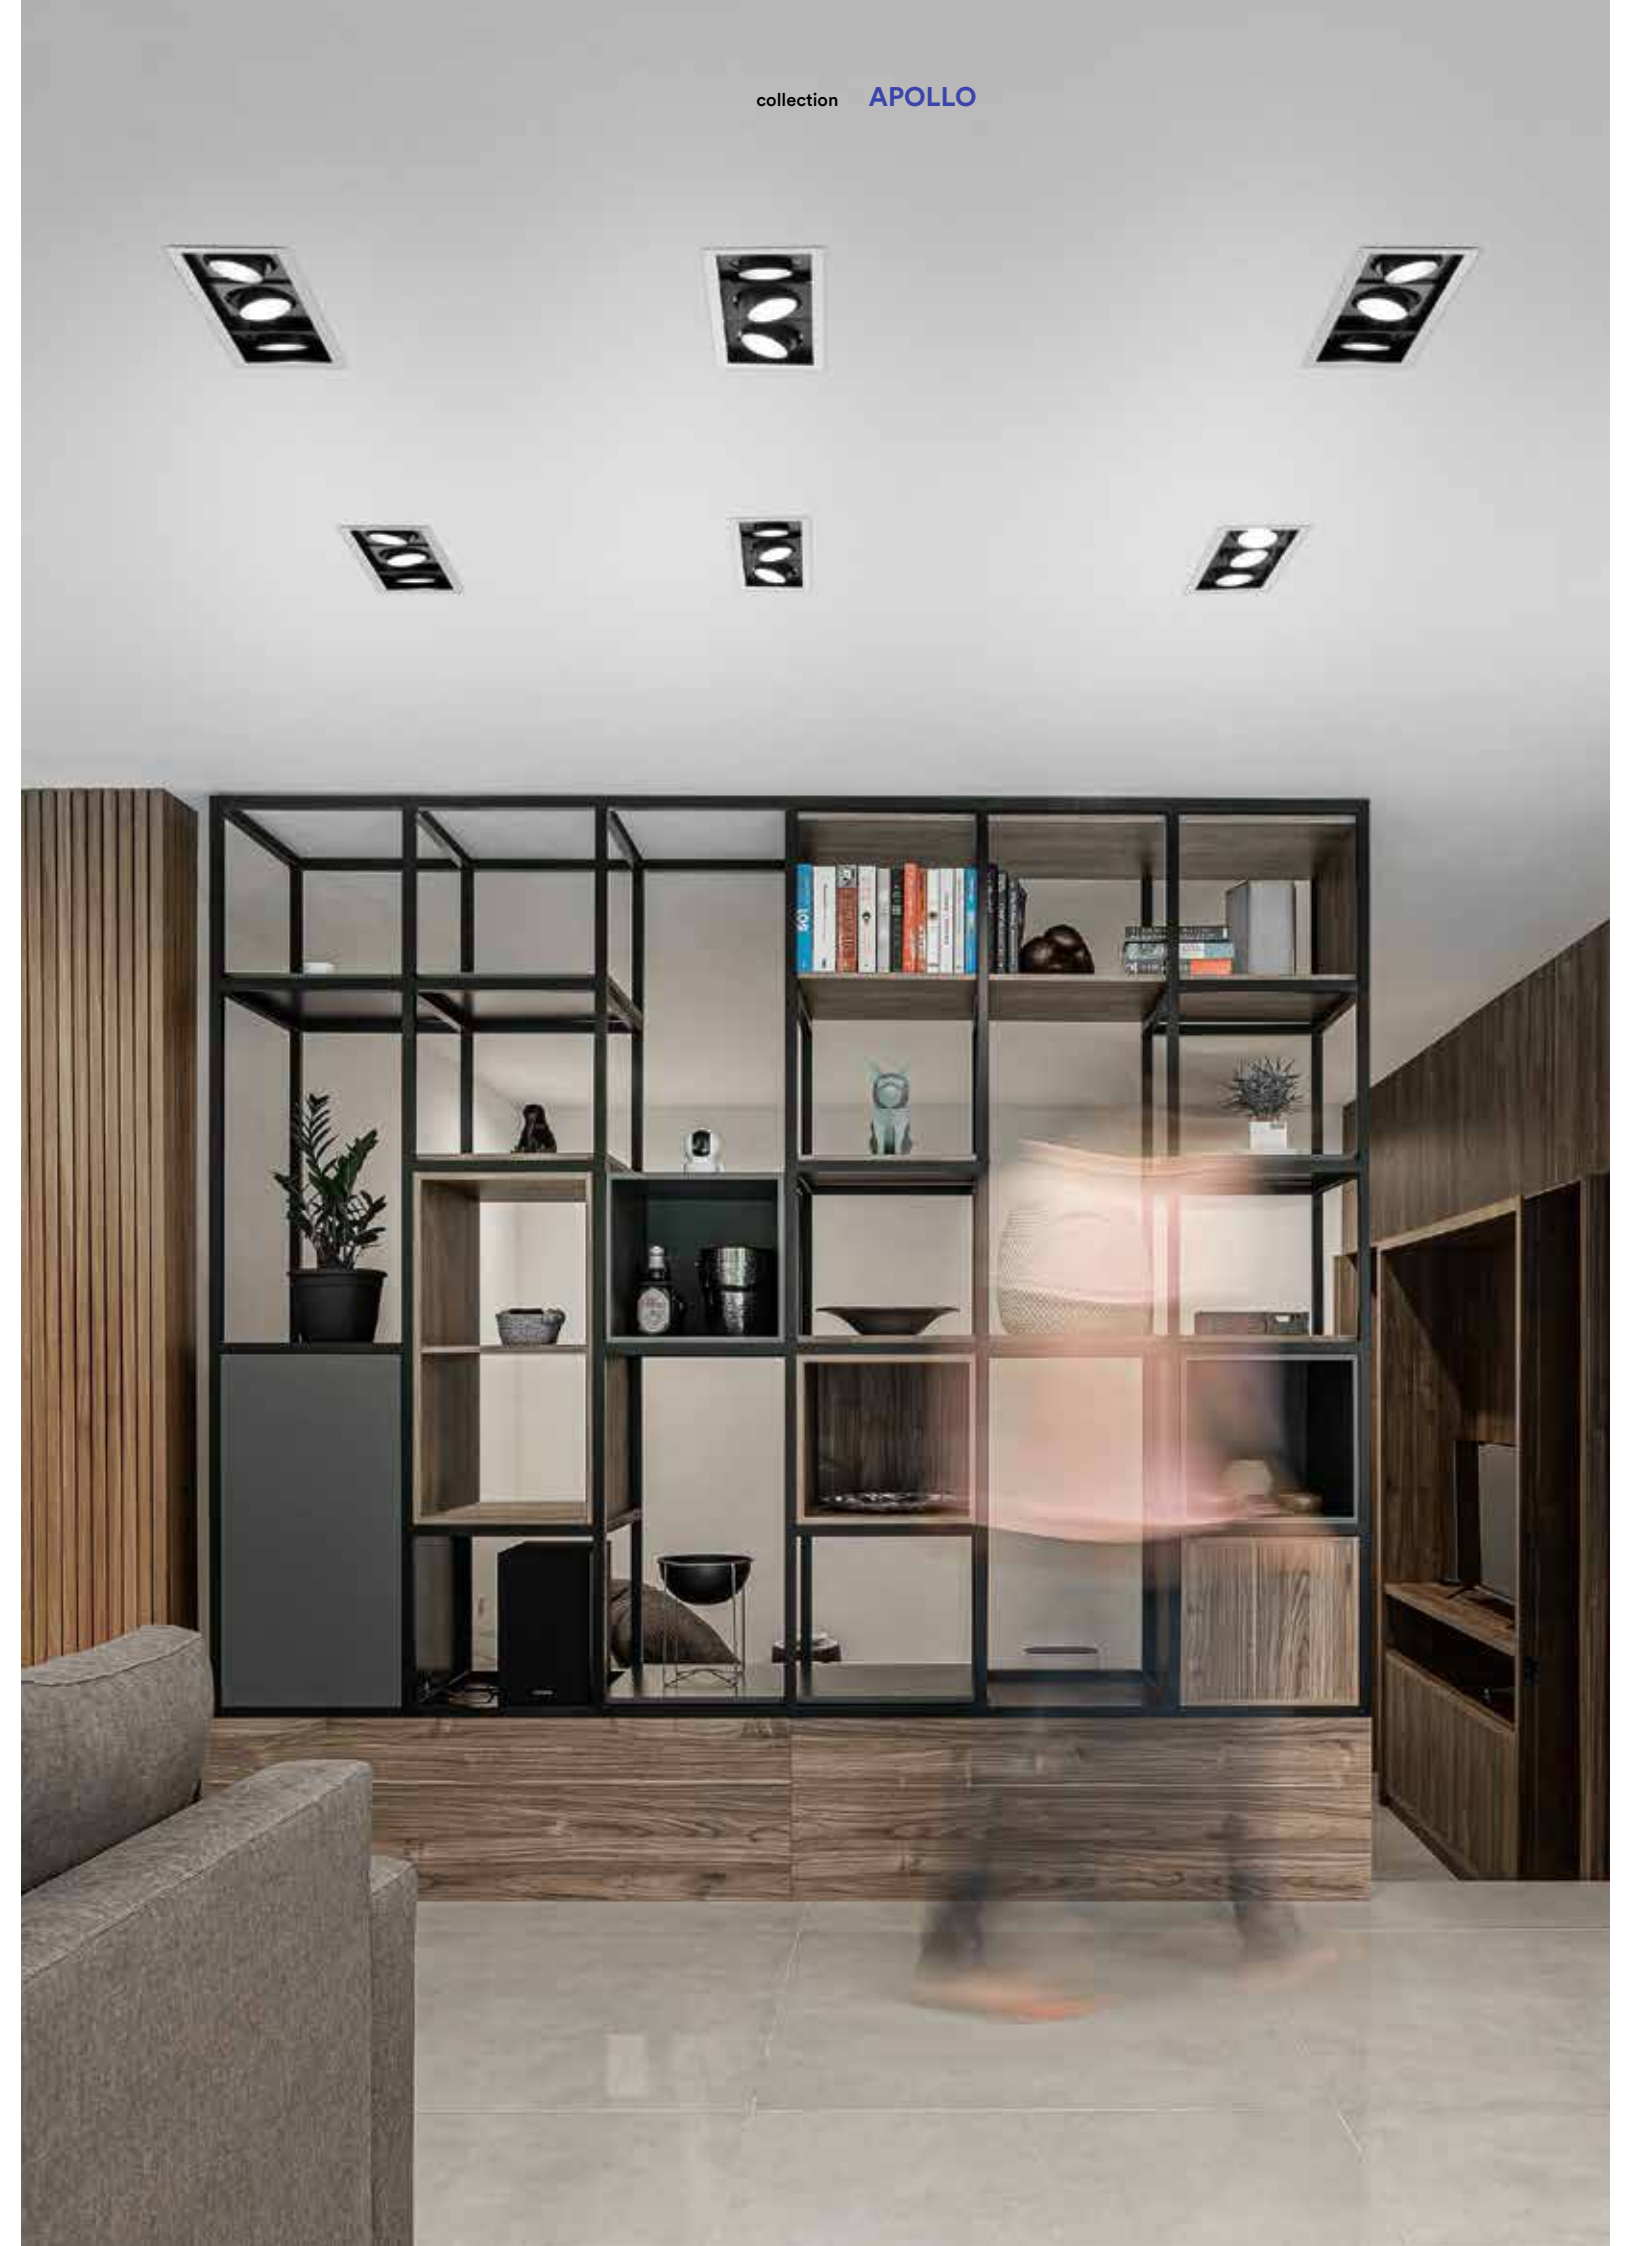




model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-1X10C</b> 8031440360623	3000K	White	1000 lm	1 × 10W	40°	-	100 × 100 mm
<b>INC-APOLLO-1X10M</b> 8031440360630	4000K	White	1000 lm	1 × 10W	40°	-	100 × 100 mm
<b>INC-APOLLO-1X20C</b> 8031440360692	3000K	White	2000 lm	1 × 20W	40°	-	125 × 125 mm
<b>INC-APOLLO-1X20M</b> 8031440360708	4000K	White	2000 lm	1 × 20W	40°	-	125 × 125 mm

model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-1X30C</b> 8031440360753	3000K	White	2900 lm	1 × 30W	40°	0.90	175 × 175 mm
<b>INC-APOLLO-1X30M</b> 8031440360760	4000K	White	2900 lm	1 × 30W	40°	0.90	175 × 175 mm
<b>INC-APOLLO-1X45C</b> 8031440360777	3000K	White	4500 lm	1 × 45W	40°	0.90	175 × 175 mm
<b>INC-APOLLO-1X45M</b> 8031440360784	4000K	White	4500 lm	1 × 45W	40°	0.90	175 × 175 mm

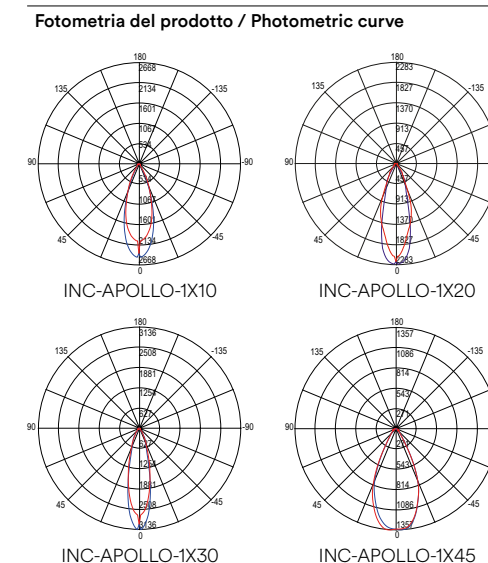


model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-2X10C</b> 8031440360647	3000K	White	2000 lm	2 × 10W	40°	-	190 × 100 mm
<b>INC-APOLLO-2X10M</b> 8031440360654	4000K	White	2000 lm	2 × 10W	40°	-	190 × 100 mm
<b>INC-APOLLO-2X20C</b> 8031440360715	3000K	White	4000 lm	2 × 20W	40°	-	245 × 125 mm
<b>INC-APOLLO-2X20M</b> 8031440360722	4000K	White	4000 lm	2 × 20W	40°	-	245 × 125 mm

model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-2X30C</b> 8031440360791	3000K	White	5800 lm	2 × 30W	40°	0.90	320 × 175 mm
<b>INC-APOLLO-2X30M</b> 8031440360807	4000K	White	5800 lm	2 × 30W	40°	0.90	320 × 175 mm
<b>INC-APOLLO-2X45C</b> 8031440360814	3000K	White	9000 lm	2 × 45W	40°	0.90	320 × 175 mm
<b>INC-APOLLO-2X45M</b> 8031440360821	4000K	White	9000 lm	2 × 45W	40°	0.90	320 × 175 mm

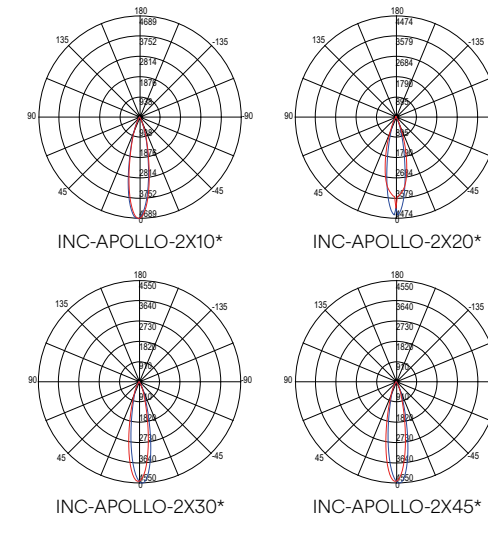

model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-3X10C</b> 8031440360661	3000K	White	3000 lm	3 × 10W	40°	-	290 × 100 mm
<b>INC-APOLLO-3X10M</b> 8031440360678	4000K	White	3000 lm	3 × 10W	40°	-	290 × 100 mm
<b>INC-APOLLO-3X20C</b> 8031440360746	3000K	White	6000 lm	3 × 20W	40°	-	355 × 125 mm
<b>INC-APOLLO-3X20M</b> 8031440360739	4000K	White	6000 lm	3 × 20W	40°	-	355 × 125 mm

model	colour temp.	colour	lumen	watt	beam angle	pf	dimensions
<b>INC-APOLLO-3X30C</b> 8031440360845	3000K	White	8700 lm	3 × 30W	40°	0.90	475 × 175 mm
<b>INC-APOLLO-3X30M</b> 8031440360838	4000K	White	8700 lm	3 × 30W	40°	0.90	475 × 175 mm
<b>INC-APOLLO-3X45C</b> 8031440360852	3000K	White	13500 lm	3 × 45W	40°	0.90	475 × 175 mm
<b>INC-APOLLO-3X45M</b> 8031440360869	4000K	White	13500 lm	3 × 45W	40°	0.90	475 × 175 mm

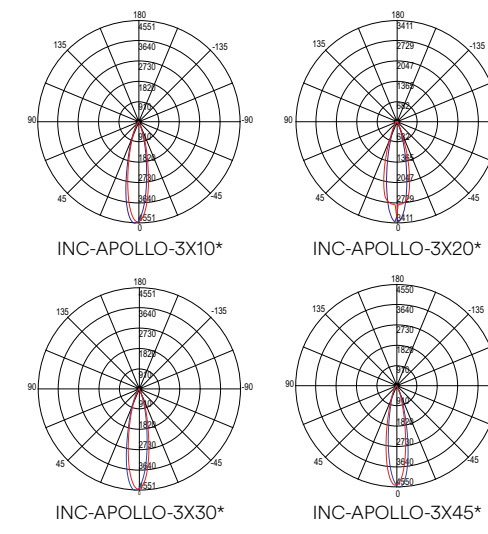


Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

# OUTSIDER

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco opaco e bordatura interna nera. Luci spot con testa estraibile e orientabile a 350°.

Anti-glare recessed spotlight with aluminum structure, matt white finish and black inner border. Spot lights with pull-out head and adjustable to 350°.

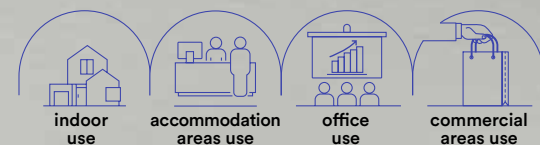

collection **OUTSIDER**



**Materiale**  
alluminio

**Material**  
aluminum

**Colore**

bianco opaco  
con bordatura  
interna nera

**Colour**

matt white  
color and black  
internal ring



**Temperatura colore**  
3000K / 4000K



**Colour temperature**  
3000K / 4000K



**Driver**  
incluso















**Driver**  
included




In.tec light **INCASSI / RECESSED LAMPS**









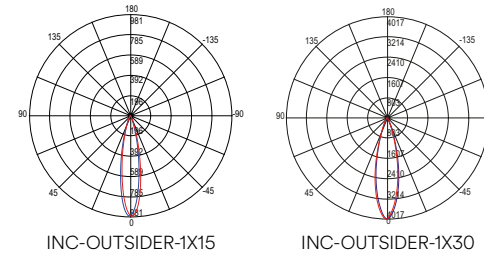






	colour temp.	colour		colour temp.	colour
<b>INC-OUTSIDER-1X15C</b> 8031414864225			<b>INC-OUTSIDER-1X30C</b> 8031414864256		
lumen	1375 lm		lumen	3100 lm	
<b>INC-OUTSIDER-1X15M</b> 8031414864119			<b>INC-OUTSIDER-1X30M</b> 8031414864133		
lumen	1375 lm		lumen	3100 lm	
watt	1 x 15W		watt	1 x 30W	
beam angle	24°		beam angle	24°	
pf	-		pf	0.90	
	90 x 90 x pr. 96 mm			116 x 116 x pr. 110 mm	







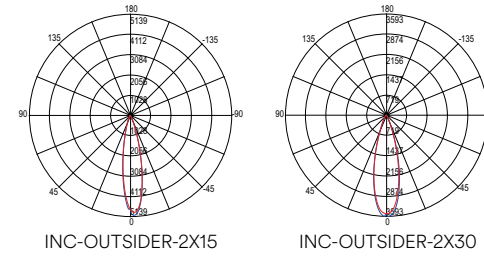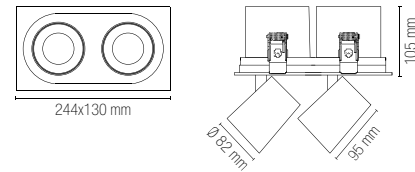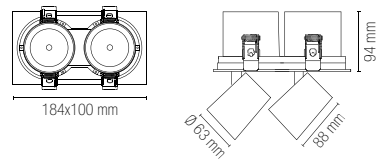








Fotometria del prodotto / Photometric curve



	colour temp.	colour		colour temp.	colour
<b>INC-OUTSIDER-2X15C</b> 8031414864232			<b>INC-OUTSIDER-2X30C</b> 8031414864263		
lumen	2750 lm		lumen	6200 lm	
<b>INC-OUTSIDER-2X15M</b> 8031414864126			<b>INC-OUTSIDER-2X30M</b> 8031414864140		
lumen	2750 lm		lumen	6200 lm	
watt	2 x 15W		watt	2 x 30W	
beam angle	24°		beam angle	24°	
pf	-		pf	0.90	
	174 x 90 x pr. 96 mm			230 x 116 x pr. 110 mm	



	colour temp.	colour		colour temp.	colour
<b>INC-OUTSIDER-3X15C</b> 8031414864249			<b>INC-OUTSIDER-3X30C</b> 8031414864270		
lumen	4125 lm		lumen	9300 lm	
<b>INC-OUTSIDER-3X15M</b> 8031414864102			<b>INC-OUTSIDER-3X30M</b> 8031414864157		
lumen	4125 lm		lumen	9300 lm	
watt	3 x 15W		watt	3 x 30W	
beam angle	24°		beam angle	24°	
pf	-		pf	0.90	
	260 x 90 x pr. 96 mm			335 x 116 x pr. 110 mm	

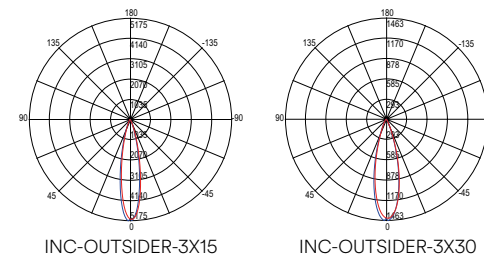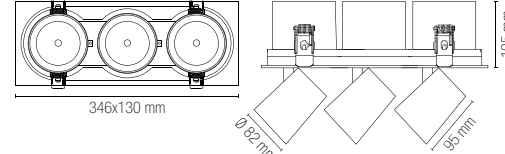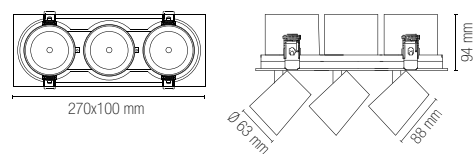

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curves represent the single module of each element

# DELTA INC

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco satinato e riflettore silver. Luci spot con testa estraibile e orientabile. Disponibile anche nella colorazione per la linea food.

Anti-glare recessed spotlight with aluminum structure, satin white finish and silver reflector. Spot lights with removable and adjustable head. Also available for lighting food line.

**Materiale**

alluminio

**Colore**

bianco satinato e riflettore silver

**Temperatura colore selezionabile**

3000K / 4000K / 6500K



**Driver**

incluso

**Material**

aluminum

**Colour**

satin white and silver reflector

**Selectable color temperature**

3000K / 4000K / 6500K



**Driver**

included



technical information **DELTA INC**



**INC-DELTA-38DA**

8031414923786

lumen

colour temp. colour  
6080 lm

watt 38W  
beam angle 60°  
pf 0.90  
Ø 160 mm




**INC-DELTA-38 INC**

8031414893546


lumen

colour temp. colour  
4300 lm

watt 38W  
beam angle 60°  
pf 0.90  
Ø 160 mm



Fotometria del prodotto / Photometric curve



INC-DELTA-38

Illuminazione per generi alimentari / Food lighting



**INC-DELTA-38BR**

8031414924226

lumen

K

CRI

colour temp. colour  
6080 lm  
2500 K  
>90



**INC-DELTA-38RM**

8031414924233

lumen

K

CRI

colour temp. colour  
6080 lm  
3100 K  
>70



**INC-DELTA-38FM**

8031414924240

lumen

K

CRI

colour temp. colour  
6080 lm  
3000 K  
>63



**INC-DELTA-38FR**

8031414924257

lumen

K

CRI

colour temp. colour  
6080 lm  
3000 K  
>93




watt 30W  
beam angle 24°  
pf 0.90  
Ø 150 mm

# LYBRA

Faretto ad incasso rettangolare con struttura in alluminio e finitura in bianco satinato. Diffusore con orientabilità verticale.

Rectangular recessed spotlight with aluminum structure and satin white finish. Diffuser with vertical orientability.



**Materiale**

alluminio + PC

**Colore**

bianco satinato



**Temperatura colore selezionabile**

3000K / 4000K / 6500K



**Driver**

incluso

**Material**

aluminum + PC

**Colour**

satin white



**Selectable color temperature**

3000K / 4000K / 6500K




**Driver**

included



**Fotometria del prodotto / Photometric curve**




INC-LYBRA-38



**INC-LYBRA-38**  
8031414893553  
lumen


colour temp. | colour  
4400 lm

watt 38W  
beam angle 120°  
pf 0.90  
220 x 140 mm



# DAMA

Faretto da incasso con struttura in policarbonato e doppia ghiera intercambiabile rotonda e quadrata. Disponibile in bianco o nero. Recessed light with polycarbonate structure and double interchangeable ring round or square. Available in black or white colors.

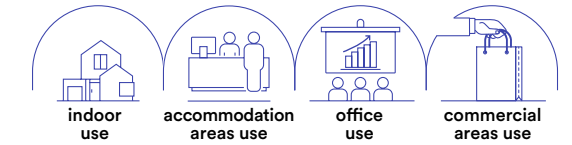

**Materiale**  
PC

**Colore**  
bianco  
nero



**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
PC

**Colour**  
white  
black




**Colour temperature**  
4000K



**Driver**  
included



**Fotometria del prodotto / Photometric curve**



INC-DAMA-QR44




**INC-DAMA-QR44-BCO**  
8031414881581  
lumen


colour temp. | colour  
300 lm

**INC-DAMA-QR44-NER**  
8031414881598  
lumen

colour temp. | colour  
300 lm

watt LED 3W  
beam angle 100°  
Ø 35 mm

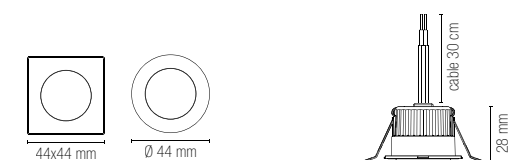

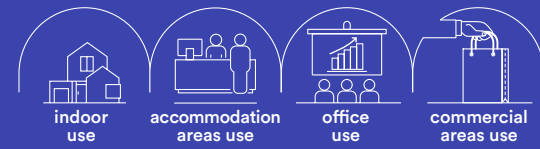

**Kit fibra ottica.**  
Fiber optic kit.



**Materiale**  
fibra ottica  
traslucente

**Temperatura colore**  
RGB + 4000K




**Material**  
translucent  
optical fiber

**Colour temperature**  
RGB + 4000K




**LED-OPTICAL-200**  
8031414925131

200 fiber of Ø 1mm  
Starry sky




**LED-OPTICAL-500**  
8031414925148

500 fiber of Ø 0,75mm  
Side glow



**LED-OPTICAL-ENG**  
8031414925155  
change color

colour temp.  
RGBW




DC12V + Adaptor 220V

16W



**LED-OPTICAL-ENG-TW**  
8031414925162  
Change color twinkle effect

colour temp.  
RGBW



DC12V + Adaptor 220V

16W



# STARLIGHT STARLIGHT30



## STARLIGHT

**Materiale**  
alluminio

**Colore**  
bianco, argento



**Temperatura colore**  
4000K / BLU



**Driver**  
non incluso

**Material**  
aluminum

**Colour**  
white, silver



**Colour temperature**  
4000K / BLU



**Driver**  
not included

## STARLIGHT 30

**Materiale**  
alluminio

**Colore**  
bianco, argento



**Temperatura colore**  
4000K



**Driver**  
12V DC 100mA 6W

**Material**  
aluminum


**Colour**  
white, silver



**Colour temperature**  
4000K



**Driver**  
12V DC 100mA 6W

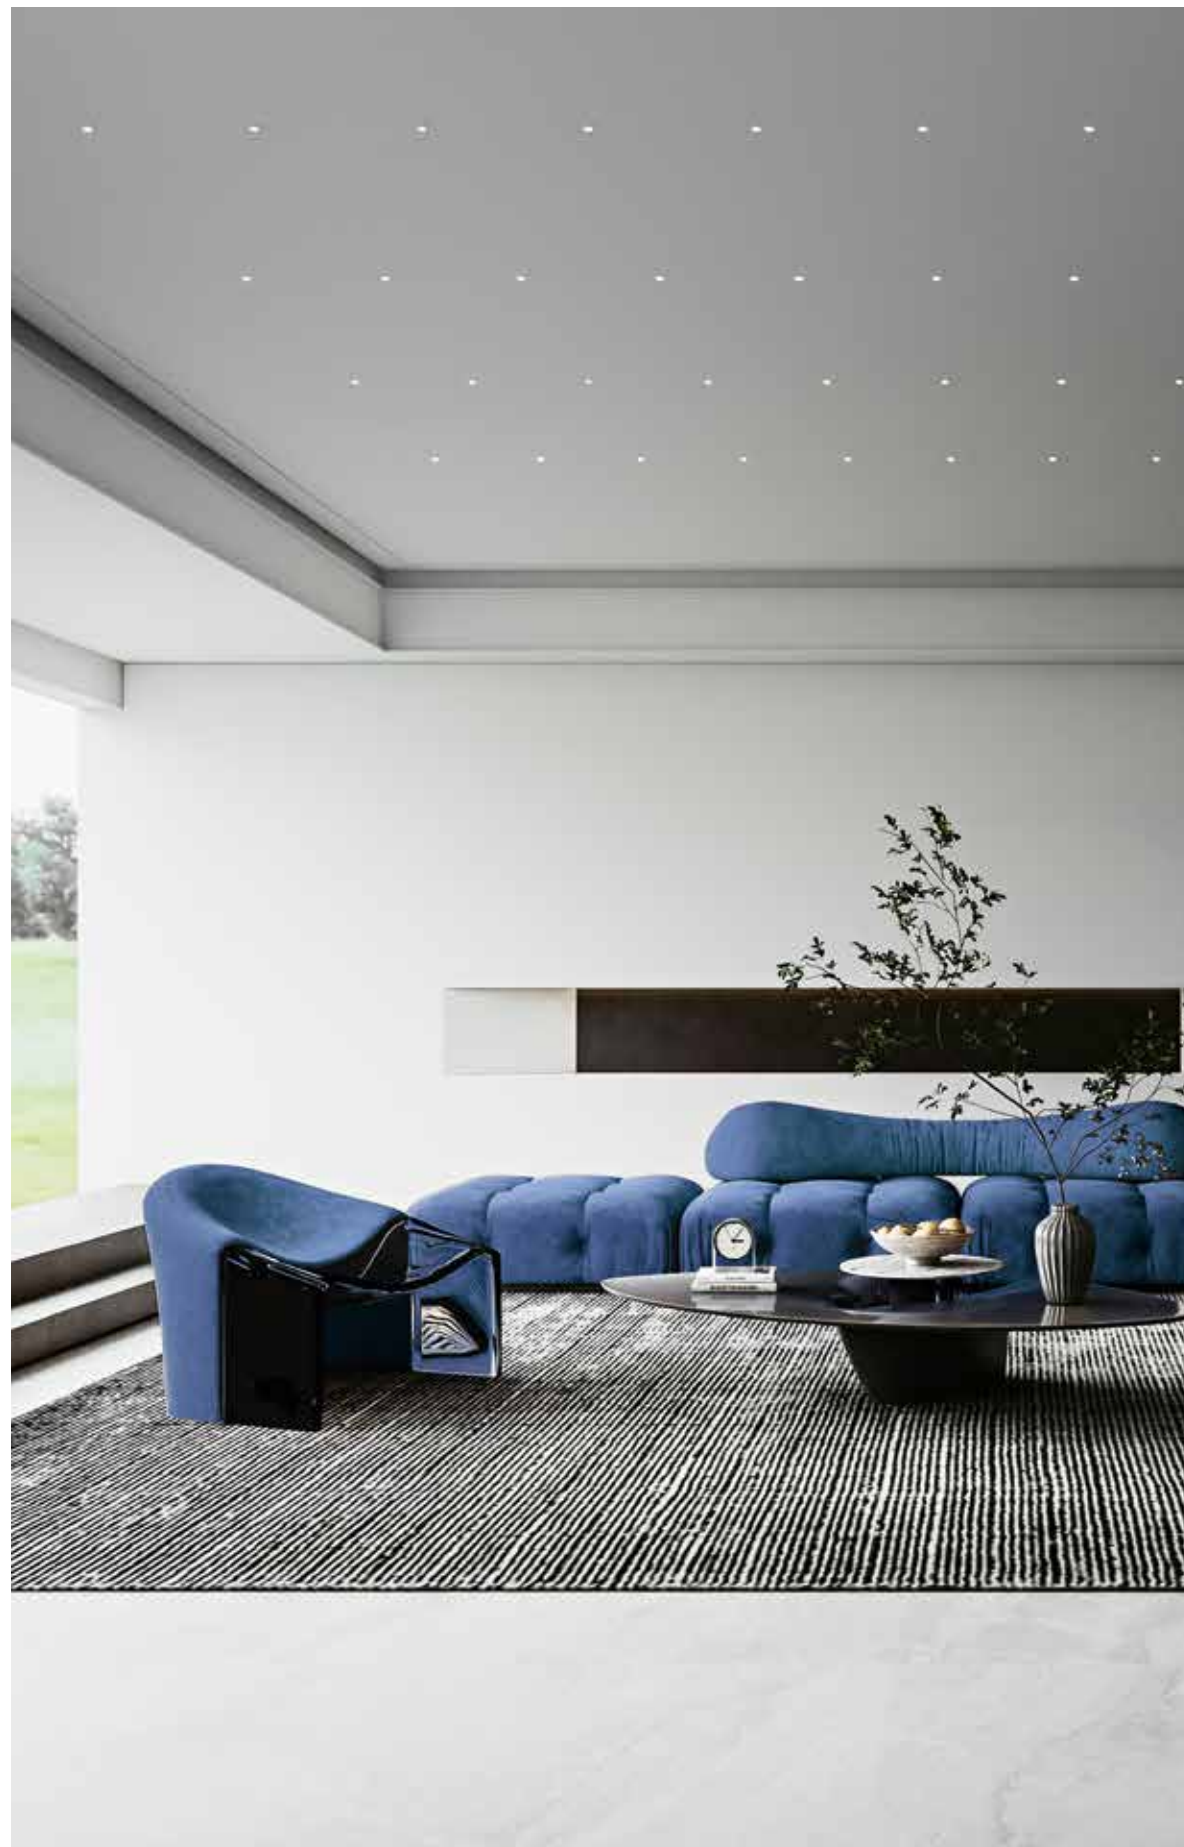

CRI  
>80

technical information



## STARLIGHT

Connessione in parallelo / Parallel connection



**Mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.**  
Downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

**LED-STARLIGHT-W**  
8031440361682

lumen

**LED-STARLIGHT-BLU**  
8031440361699

colour temp.	colour

with 1 m. cable  
watt

LED 0,2W



Ø 14 mm

## STARLIGHT 30



**Kit 30 mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.**  
Kit 30 downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

**LED-STARLIGHT-30-W**  
8031440357692

lumen

with 1 m. cable  
watt

colour temp.	colour

LED 30 x 0,2W



Ø 14 mm

Accessori inclusi / Included accessories



Ghiera bianca intercambiabile /  
White changeable ring



Ghiera silver intercambiabile /  
Silver changeable ring

Accessori non inclusi / Not included accessories

**LED-STARLIGHT-NEX**  
8031440364430

Scatola connessione per 10  
teste 12V DC 1A incl. Cavo 1m. /  
Box connection for 10 pcs  
12V DC 1A with 1m. cable


**LED-STARLIGHT-CONN**  
8031440364843

Connettore con singola entrata  
3 uscite per kit cielo stellato  
12V DC 1A incl. Cavo 1m. /  
Connector one input three  
output for starlight 12V  
DC 1A with 1m. cable

**LED-STARLIGHT-DR**  
8031440364447

Driver 12V DC 100mA  
6W incl. Cavo 1m. /  
Driver 12V DC 100mA  
6W incl. 1m. cable

Fotometria del prodotto /  
Photometric curve



LED-STARLIGHT 0,2W

Accessori inclusi / Included accessories



Ghiera bianca intercambiabile /  
White changeable ring




Ghiera silver intercambiabile /  
Silver changeable ring

3 Scatole connessione per 10 teste  
12V DC 1A incl. cavo 1m. /  
3 Boxes connection for 10 pcs  
12V DC 1A with 1m. cable

1 Connettore con singola entrata  
3 uscite per kit cielo stellato  
12V DC 1A incl. cavo 1m. /  
1 Connector one input three  
output for starlight  
12V DC 1A with 1m. cable

1 Driver 12V DC 100mA  
6W incl. Cavo 1m. /  
1 Driver 12V DC 100mA  
6W incl. 1m. cable

Fotometria del prodotto /  
Photometric curve




LED-STARLIGHT 0,2W

# ASSO KIT 3

**Kit 3 faretti da incasso con struttura in alluminio disponibile nella versione silver quadrata o rotonda.**

Kit 3 recessed spotlights with aluminum structure available in silver square or round.

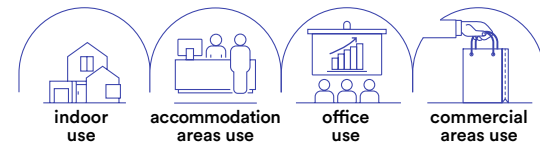

technical information **ASSO KIT 3**



**Materiale**  
alluminio

**Colore**  
argento



**Temperatura colore**  
4000K



**Driver**  
230V incluso

**Material**  
aluminum

**Colour**  
silver



**Colour temperature**  
4000K



**Driver**  
230V included




## Kit 3 pz / Kit 3 pcs



**INC-ASSO-Q3**  
8031414881628  
lumen

colour temp.	colour
3x100 lm	




watt	LED 1,2 W
beam angle	30°
	Ø 25 mm

## Kit 3 pz / Kit 3 pcs




**INC-ASSO-R3**  
8031414881611  
lumen

colour temp.	colour
3x100 lm	




watt	LED 1,2 W
beam angle	30°
	Ø 25 mm

## Fotometria del prodotto / Photometric curve




## Accessori inclusi / Included accessories

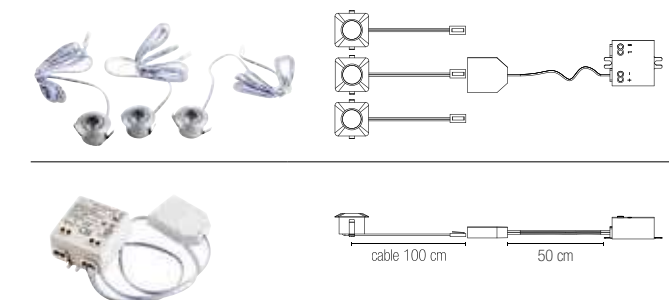

# ASSO

Faretto da incasso con struttura in alluminio disponibile in bianco nero nella forma quadrata o rotonda.

Recessed spotlight with aluminum structure available in black white in square or round shape.

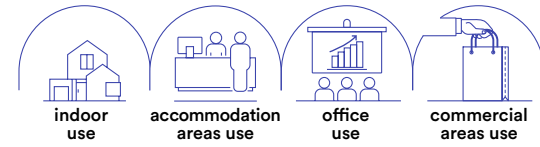

CRI >80

technical information ASSO

EASY DOMOTICA



**Materiale**  
alluminio

**Colore**  
bianco  
nero



**Temperatura colore**  
3000K / 4000K / BLU



**Driver**  
DC 24V  
tensione costante  
non incluso

**Material**  
aluminum

**Colour**  
white  
black



**Colour temperature**  
3000K / 4000K



**Driver**  
DC 24V  
constant voltage  
not included



1 pz / 1 pcs



**INC-ASSO-Q30C**

8031414881642

lumen

**INC-ASSO-Q30M**

8031414881659

lumen

colour temp. colour



100 lm

100 lm


100 lm

100 lm

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



**INC-ASSO-Q30C-NER**

8031414881666

lumen

**INC-ASSO-Q30M-NER**

8031414881673

lumen

colour temp. colour



100 lm

100 lm


100 lm

100 lm

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



**INC-ASSO-R30C**

8031414877829

lumen

**INC-ASSO-R30M**

8031414877928

lumen

**INC-ASSO-R30-BLU**

8031414877935

colour temp. colour



100 lm

100 lm

100 lm


100 lm

blu

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



**INC-ASSO-R30C-NER**

8031414881635

lumen

**INC-ASSO-R30M-NER**

8031414881680

lumen

colour temp. colour



100 lm

100 lm

100 lm

100 lm


watt LED 1,2 W

beam angle 30°



Ø 25 mm



Fotometria del prodotto / Photometric curve



Accessori inclusi / Included accessories



Connessione in parallelo / Parallel connection system

Driver p. 843-852

Controller pag. 854-857

# DOT

Faretto da incasso con struttura in alluminio disponibile in bianco nero.  
Recessed spotlight with aluminum structure available in black or white.



technical information **DOT**



**Materiale**  
alluminio + PC

**Colore**  
bianco satinato  
nero satinato



**Temperatura colore selezionabile**  
3000K / 4000K / 6500K



**Driver**  
incluso

**Material**  
aluminum + PC

**Colour**  
satin white  
satin black




**Selectable color temperature**  
3000K / 4000K / 6500K



**Driver**  
included



Fotometria del prodotto /  
Photometric curve



INC-DOT-R5



**INC-DOT-R5DA-BCO**

8031414923793

lumen

colour temp.



600 lm



**INC-DOT-R5DA-NER**

8031414923809

lumen



600 lm

watt

5W

beam angle

24°



Ø 37 mm



**INC-DOT-R5-BCO**

8031414893584

lumen



480 lm

**INC-DOT-R5-NER**

8031414893614

lumen



480 lm

watt


5W

beam angle

24°




Ø 37 mm



# HYDE

Faretto da incasso con struttura in alluminio disponibile in bianco nero.

Recessed spotlight with aluminum structure available in black or white.

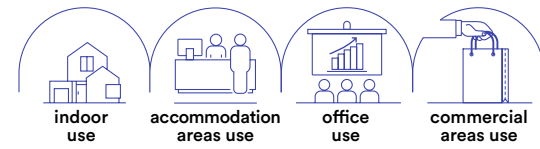

technical information **HYDE**




- Materiale**  
alluminio + PC
- Colore**  
bianco satinato  
nero satinato
- Temperatura colore selezionabile**  
2700K / 3000K / 4000K / 6500K
- Driver**  
incluso
- Material**  
aluminum + PC
- Colour**  
satin white  
satin black
- Selectable color temperature**  
2700K / 3000K / 4000K / 6500K
- Driver**  
included




**INC-HYDE-BCO**  
8031414893560  
lumen 750 lm

watt 8W  
beam angle 60°  
Ø 70 mm




**INC-HYDE-NER**  
8031414893577  
lumen 750 lm

watt 8W  
beam angle 60°  
Ø 70 mm




Fotometria del prodotto / Photometric curve



# SINKRO

Faretto da incasso lineare antiriflesso con struttura in alluminio pressofuso, finitura con bordo bianco e interno nero lucido.

Anti-glare linear recessed spotlight with die-cast aluminum structure, finish with white border and glossy black interior.

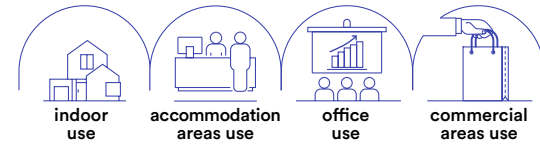


technical information **SINKRO**



**Materiale**  
alluminio pressofuso

**Colore**  
bordo bianco e  
interno nero lucido




**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
die cast aluminum


**Colour**  
white and glossy  
black inside



**Colour temperature**  
4000K




**Driver**  
included

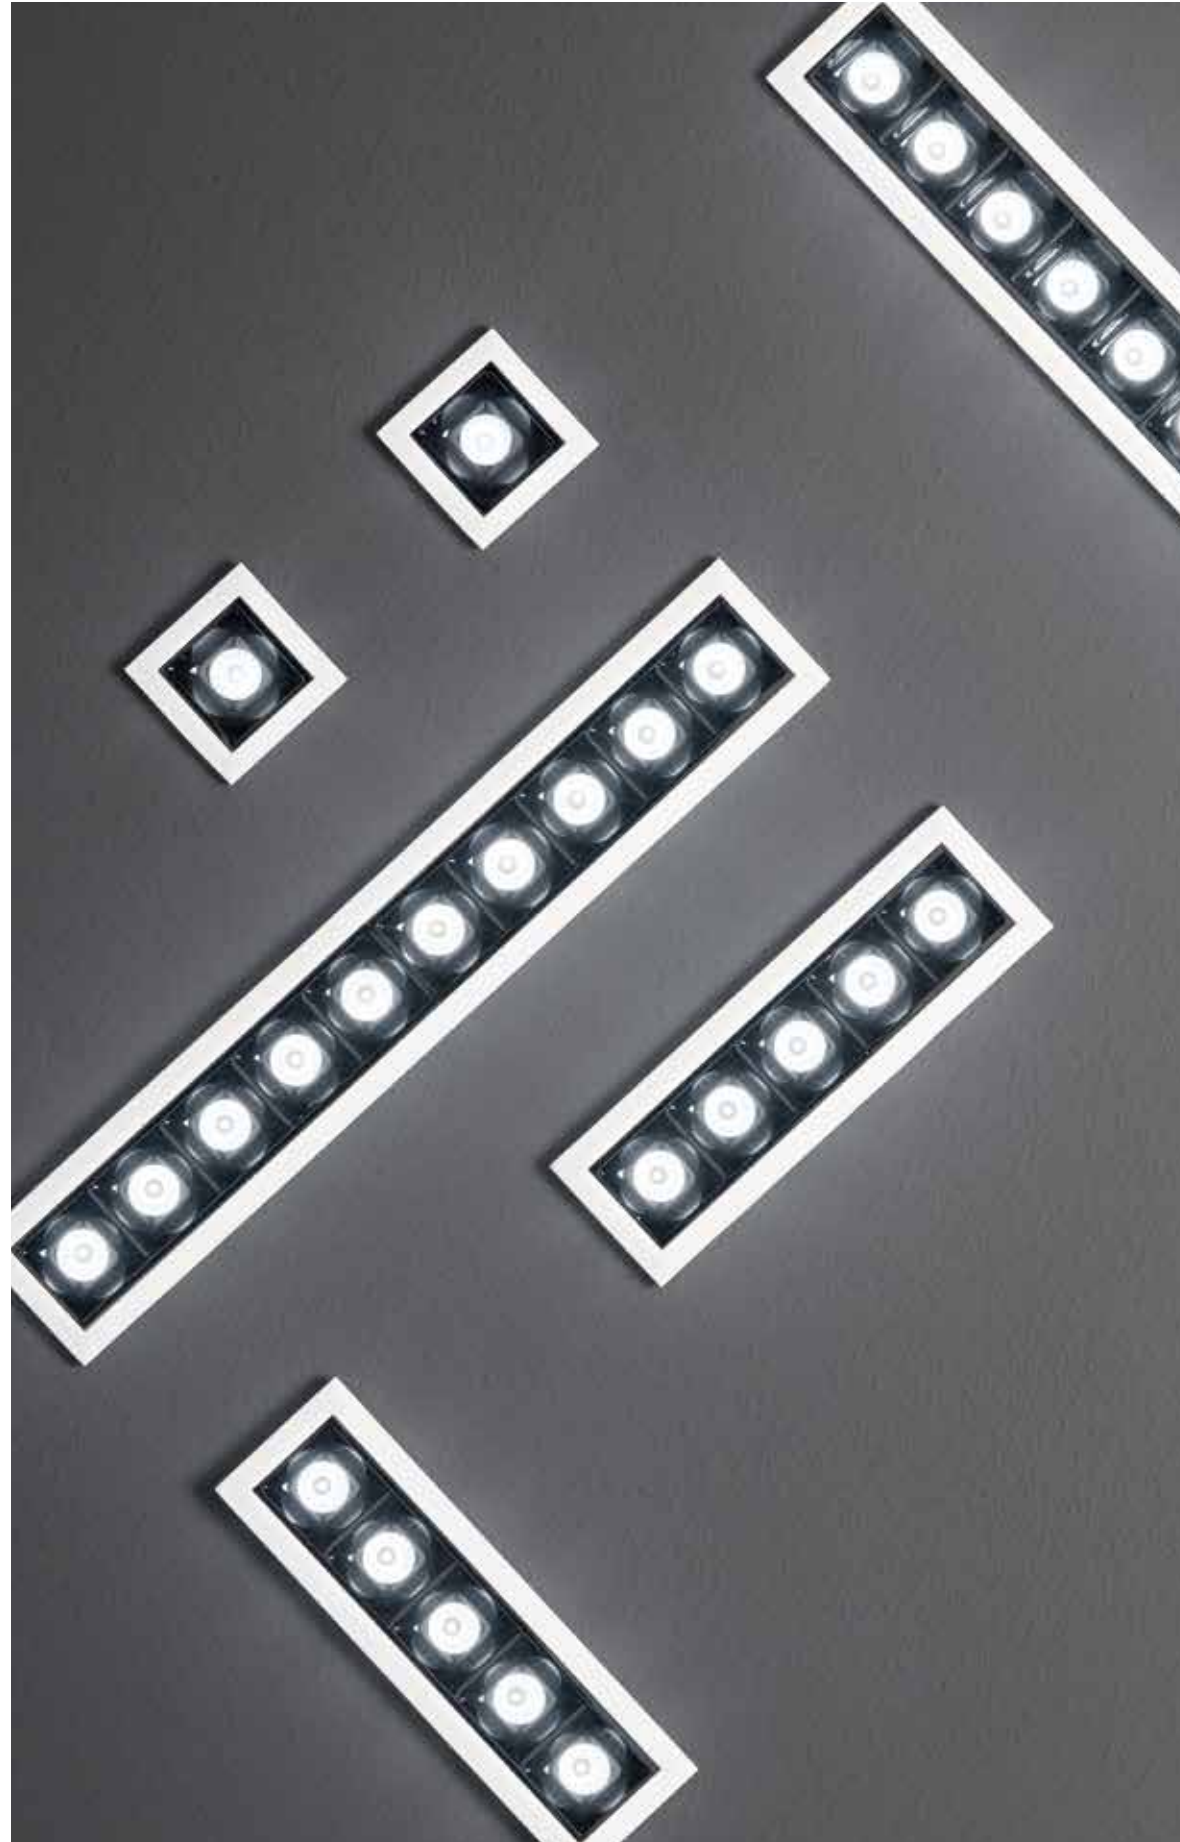

**INC-SINKRO-2M**  
8031440360876  
lumen

colour temp.	colour
230 lm	


watt	2W
beam angle	45°
	34 × 34 mm



**INC-SINKRO-10M**  
8031440360890  
lumen

colour temp.	colour
1130 lm	


watt	5 × 2W
beam angle	45°
	136 × 34 mm




**INC-SINKRO-20M**  
8031440360906  
lumen

colour temp.	colour
2260 lm	


watt	10 × 2W
beam angle	45°
	269 × 34 mm

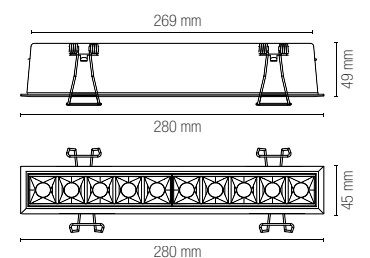


Fotometria del prodotto / Photometric curve



INC-SINKRO-2M



INC-SINKRO-10M




INC-SINKRO-20M

# ELITE

Faretto da incasso antiriflesso con struttura in alluminio e finitura in bianco gofrato. Luce spot orientabile.

Anti-glare recessed spotlight with aluminum frame and embossed white finish. Adjustable spot light.

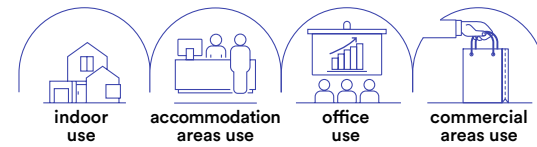

technical information ELITE



**Materiale**  
alluminio

**Colore**  
bianco  
gofrato

**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
Embossed  
white


**Colour temperature**  
3000K / 4000K




**Driver**  
included




	colour temp.	colour
<b>INC-ELITE-1X10C</b> 8031440363396 lumen		
	1000 lm	
<b>INC-ELITE-1X10M</b> 8031440363365 lumen		
	1000 lm	
watt	10W	
beam angle	40°	
pf	-	
	Ø 95 mm	




	colour temp.	colour
<b>INC-ELITE-1X20C</b> 8031440363372 lumen		
	2000 lm	
<b>INC-ELITE-1X20M</b> 8031440363341 lumen		
	2000 lm	
watt	20W	
beam angle	40°	
pf	-	
	Ø 107 mm	




	colour temp.	colour
<b>INC-ELITE-1X30C</b> 8031440363358 lumen		
	2900 lm	
<b>INC-ELITE-1X30M</b> 8031440363327 lumen		
	2900 lm	
watt	30W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	



	colour temp.	colour
<b>INC-ELITE-1X45C</b> 8031440363334 lumen		
	4500 lm	
<b>INC-ELITE-1X45M</b> 8031440363303 lumen		
	4500 lm	
watt	45W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	




Fotometria del prodotto / Photometric curve

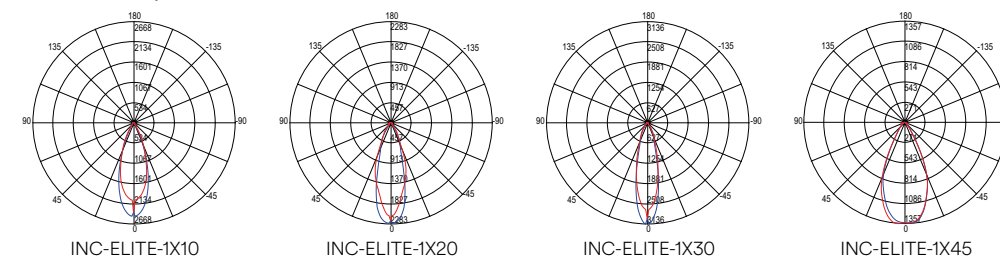

# QUARK

Faretto da incasso con struttura in alluminio antiriflesso e finitura in bianco o nero satinato. Recessed spotlight with anti-reflective aluminum structure and satin black or white finish.

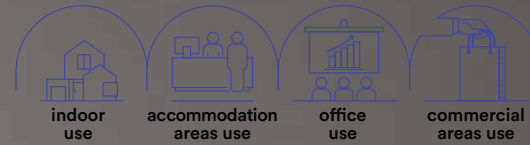

technical information **QUARK**






- Materiale**  
alluminio + PC
- Colore**  
bianco satinato  
nero satinato
- Temperatura colore selezionabile**  
3000K / 4000K / 6500K
- Driver**  
incluso
- Material**  
aluminum + PC
- Colour**  
satin white  
satin black
- Selectable color temperature**  
3000K / 4000K / 6500K
- Driver**  
included



ModelPart Number	Colour Temp.	Colour	Lumen	Watt	Beam Angle	Ø	Height
<b>INC-QUARK-R8DA-BCO</b> 8031414923816	3000K / 4000K / 6500K	White	1040 lm	8W	38°	Ø 50 mm	55 mm
<b>INC-QUARK-R8DA-NER</b> 8031414923847	3000K / 4000K / 6500K	Black	1040 lm	8W	38°	Ø 50 mm	55 mm
<b>INC-QUARK-R12DA-BCO</b> 8031414923823	3000K / 4000K / 6500K	White	1480 lm	12W	38°	Ø 75 mm	80 mm
<b>INC-QUARK-R12DA-NER</b> 8031414923854	3000K / 4000K / 6500K	Black	1480 lm	12W	38°	Ø 75 mm	80 mm
<b>INC-QUARK-R18DA-BCO</b> 8031414923830	3000K / 4000K / 6500K	White	2350 lm	18W	38°	Ø 80 mm	95 mm
<b>INC-QUARK-R18DA-NER</b> 8031414923861	3000K / 4000K / 6500K	Black	2350 lm	18W	38°	Ø 80 mm	95 mm
<b>INC-QUARK-R8-BCO</b> 8031414893621	3000K / 4000K / 6500K	White	830 lm	8W	38°	Ø 50 mm	55 mm
<b>INC-QUARK-R8-NER</b> 8031414893652	3000K / 4000K / 6500K	Black	830 lm	8W	38°	Ø 50 mm	55 mm
<b>INC-QUARK-R12-BCO</b> 8031414893638	3000K / 4000K / 6500K	White	1300 lm	12W	38°	Ø 75 mm	80 mm
<b>INC-QUARK-R12-NER</b> 8031414893669	3000K / 4000K / 6500K	Black	1300 lm	12W	38°	Ø 75 mm	80 mm
<b>INC-QUARK-R18-BCO</b> 8031414893645	3000K / 4000K / 6500K	White	2000 lm	18W	38°	Ø 80 mm	95 mm
<b>INC-QUARK-R18-NER</b> 8031414893676	3000K / 4000K / 6500K	Black	2000 lm	18W	38°	Ø 80 mm	95 mm

Fotometria del prodotto / Photometric curve






# XANTO

Faretto da incasso con struttura in alluminio pressofuso antiriflesso con finitura in bianco satinato. Disponibile dalla forma quadrata o rotonda in diverse misure.


Recessed spotlight with anti-glare die-cast aluminum structure with satin white finish. Available in square or round shape different sizes.

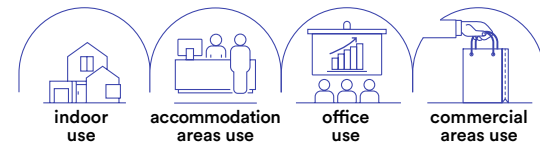

- Materiale**  
alluminio pressofuso
- Colore**  
bianco satinato
- Temperatura colore**  
3000K / 4000K / 5000K
- Driver**  
incluso
- Material**  
die cast aluminum
- Colour**  
satin white
- Colour temperature**  
3000K / 4000K / 5000K
- Driver**  
included




collection XANTO

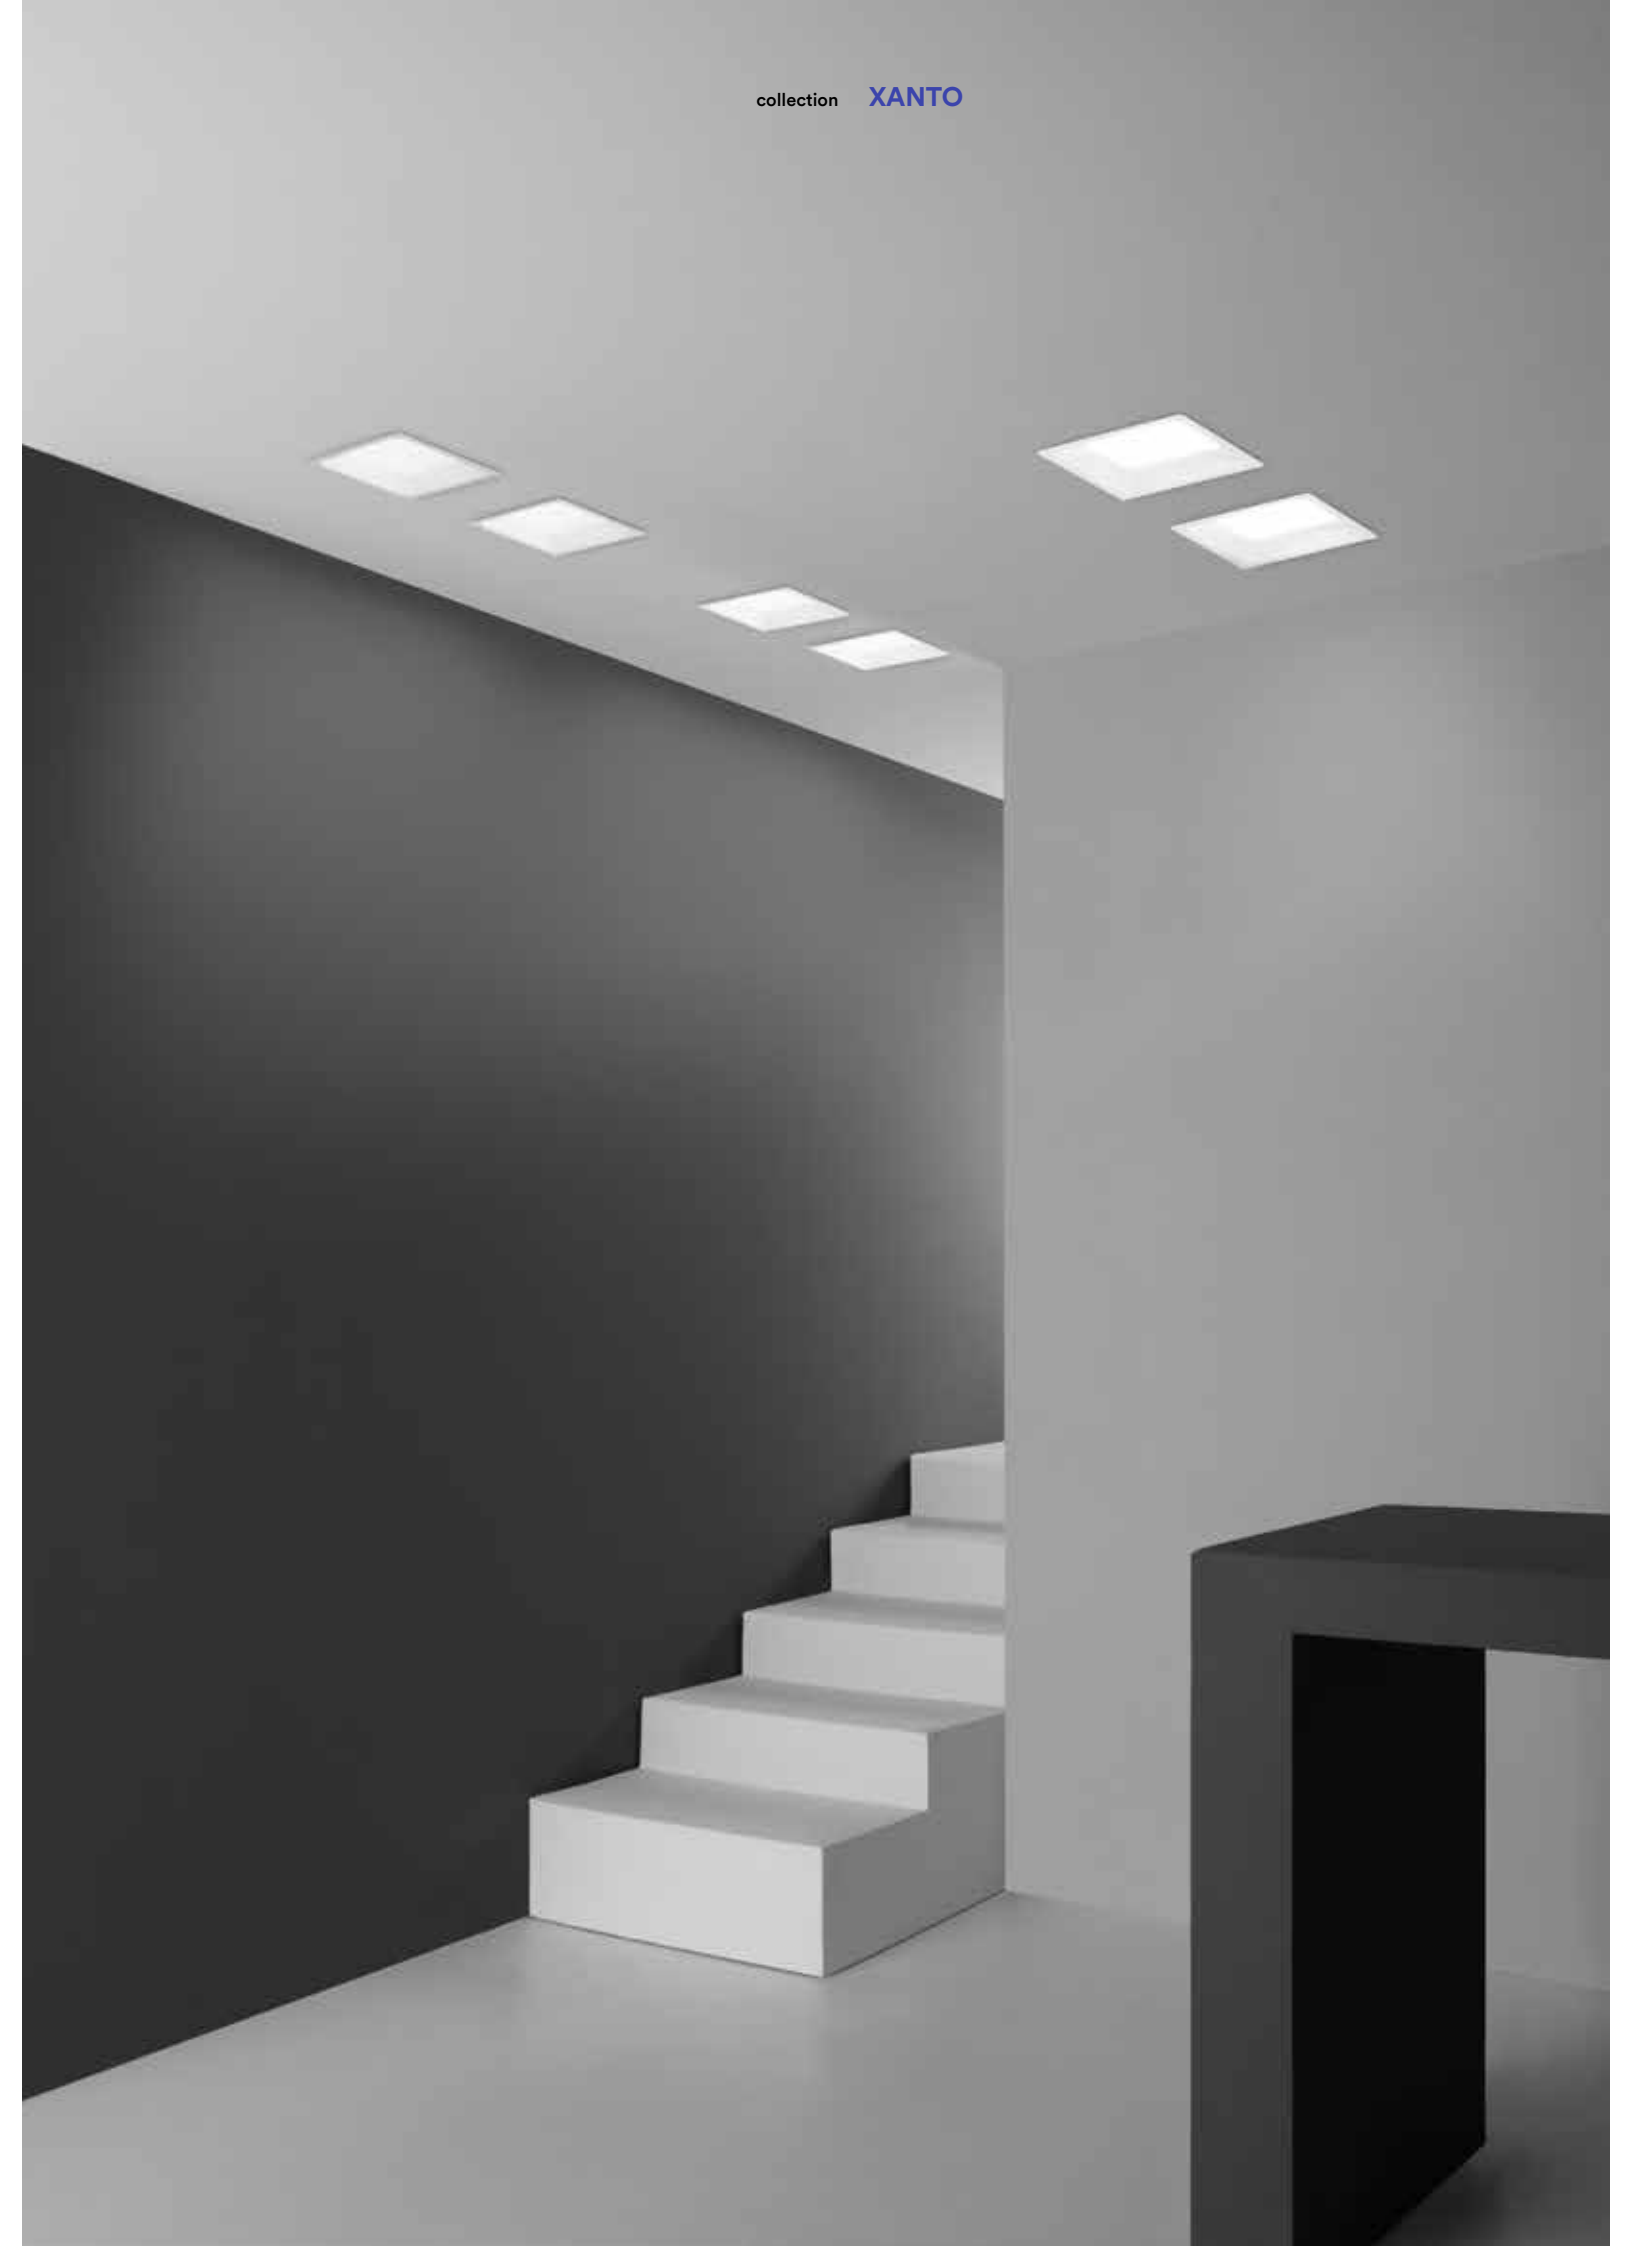






	colour temp.	colour
<b>INC-XANTO-C-R120</b> 8031414861101 lumen	3000 K	White
<b>INC-XANTO-M-R120</b> 8031414861224 lumen	3000 K	White
<b>INC-XANTO-F-R120</b> 8031414861163 lumen	3000 K	White
watt	12W	
beam angle	98°	
pf	-	
	Ø 110 mm	




	colour temp.	colour
<b>INC-XANTO-C-Q110</b> 8031414861071 lumen	3000 K	White
<b>INC-XANTO-M-Q110</b> 8031414861194 lumen	3000 K	White
<b>INC-XANTO-F-Q110</b> 8031414861132 lumen	3000 K	White
watt	12W	
beam angle	98°	
pf	-	
	100 × 100 mm	




	colour temp.	colour
<b>INC-XANTO-C-R154</b> 8031414861118 lumen	3000 K	White
<b>INC-XANTO-M-R154</b> 8031414861231 lumen	3000 K	White
<b>INC-XANTO-F-R154</b> 8031414861170 lumen	3000 K	White
watt	18W	
beam angle	98°	
pf	-	
	Ø 145 mm	

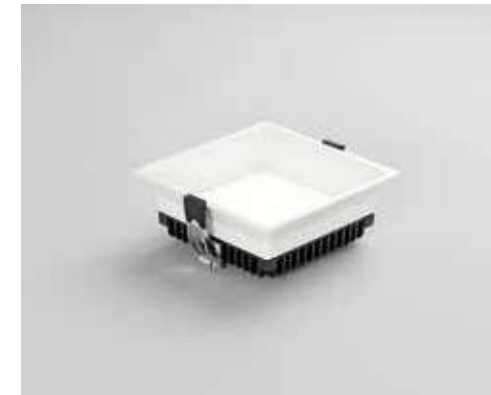


	colour temp.	colour
<b>INC-XANTO-C-Q145</b> 8031414861088 lumen	3000 K	White
<b>INC-XANTO-M-Q145</b> 8031414861200 lumen	3000 K	White
<b>INC-XANTO-F-Q145</b> 8031414861149 lumen	3000 K	White
watt	18W	
beam angle	98°	
pf	-	
	136 × 136 mm	




	colour temp.	colour
<b>INC-XANTO-C-R220</b> 8031414861125 lumen	3000 K	White
<b>INC-XANTO-M-R220</b> 8031414861248 lumen	3000 K	White
<b>INC-XANTO-F-R220</b> 8031414861187 lumen	3000 K	White
watt	30W	
beam angle	98°	
pf	0.90	
	Ø 200 mm	




	colour temp.	colour
<b>INC-XANTO-C-Q220</b> 8031414861095 lumen	3000 K	White
<b>INC-XANTO-M-Q220</b> 8031414861217 lumen	3000 K	White
<b>INC-XANTO-F-Q220</b> 8031414861156 lumen	3000 K	White
watt	30W	
beam angle	98°	
pf	0.90	
	200 × 200 mm	



Fotometria del prodotto / Photometric curve

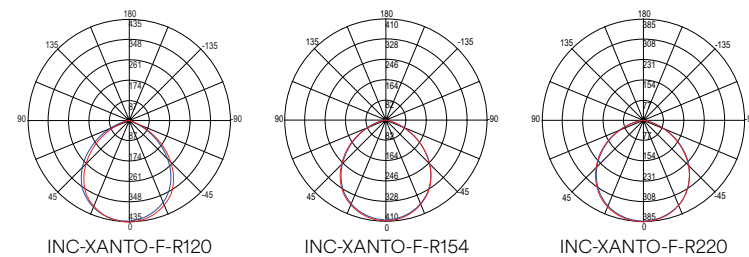


Fotometria del prodotto / Photometric curve

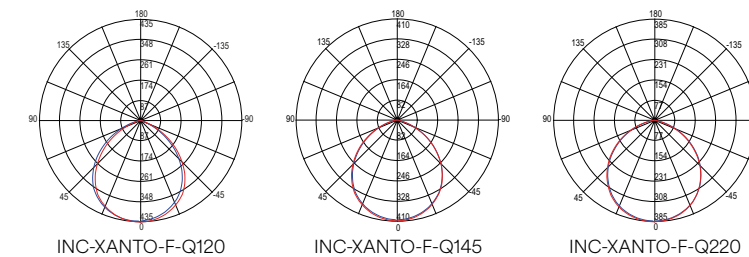

# MACK

Faretto da incasso in policarbonato anti  
abbagliamento con diffusore bianco e riflettore cromato.

Recessed spotlight in anti-glare polycarbonate  
with white diffuser and chromed reflector.

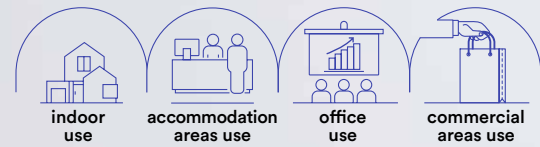

technical information **MACK**



**Materiale**  
PC

**Colore**  
bianco con  
riflettore cromato



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
PC

**Colour**  
white with  
chrome reflector



**Colour temperature**  
3000K / 4000K




**Driver**  
built-in



**INC-MACK-15C**  
8031414873913  
lumen

colour temp.	colour
1650 lm	



**INC-MACK-15**  
8031414867974  
lumen


colour temp.	colour
1650 lm	

watt 15W  
beam angle 75°  
 Ø 125 mm



**INC-MACK-20C**  
8031414873906  
lumen

colour temp.	colour
2500 lm	



**INC-MACK-20**  
8031414867981  
lumen


colour temp.	colour
2500 lm	

watt 20W  
beam angle 75°  
 Ø 160 mm



**INC-MACK-25C**  
8031414873890  
lumen

colour temp.	colour
3050 lm	




**INC-MACK-25**  
8031414867998  
lumen

colour temp.	colour
3050 lm	

watt 25W  
beam angle 75°  
 Ø 200 mm


Fotometria del prodotto / Photometric curve

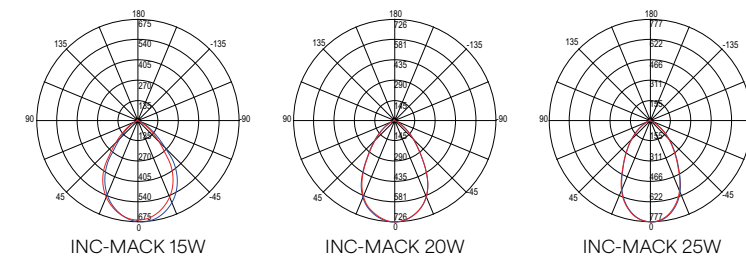

# TRON

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco con interruttore per regolazione temperatura colore.

Recessed spotlight with aluminum structure and matt white acrylic diffuser with switch for color temperature regulation.

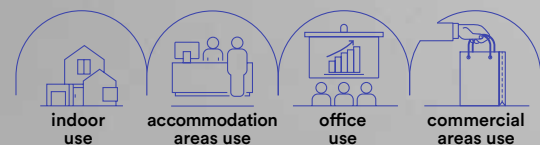

## Materiale

struttura in alluminio,  
diffusore in acrilico

## Colore

bianco opaco



## Temperatura colore selezionabile

3000K / 4000K / 6000K



## Driver

incluso

## Material

aluminum structure,  
acrylic diffuser

## Colour

matt white



## Selectable color temperature

3000K / 4000K / 6000K



## Driver

included




technical information **TRON**



**INC-TRON-7**  
8031414876198  
lumen

colour temp. | colour  
720 lm


watt 7W  
beam angle 120°  
pf -  
Ø 75 mm



**INC-TRON-20**  
8031414876204  
lumen

colour temp. | colour  
2480 lm


watt 20W  
beam angle 120°  
pf 0.90  
Ø 175 mm




**INC-TRON-30**  
8031414876211  
lumen

colour temp. | colour  
3300 lm

watt 30W  
beam angle 120°  
pf 0.90  
Ø 210 mm





## Fotometria del prodotto / Photometric curve

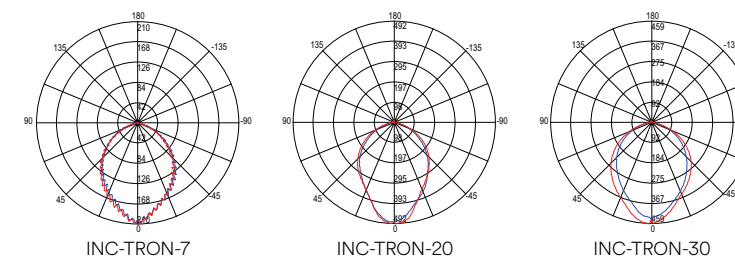

# SLIM CCT

Faretto da incasso con struttura rotonda in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.  
Recessed spotlight with round structure in ultra-thin die-cast aluminum with switch for color temperature regulation.



technical information **SLIM CCT**





- Materiale**  
alluminio pressofuso
- Colore**  
bianco
- Temperatura colore selezionabile**  
3000K / 4000K / 6500K
- Driver**  
incluso
- Material**  
die cast aluminum
- Colour**  
white
- Selectable color temperature**  
3000K / 4000K / 6500K
- Driver**  
included





**INC-SLIM-8CCT**  
8031414892310  
lumen 780 lm

watt 8W  
beam angle 120°  
Ø 110 mm





**INC-SLIM-12CCT**  
8031414892280  
lumen 1260 lm

watt 12W  
beam angle 120°  
Ø 160 mm






**INC-SLIM-18CCT**  
8031414892297  
lumen 1980 lm

watt 18W  
beam angle 120°  
Ø 205 mm



**INC-SLIM-24CCT**  
8031414892303  
lumen 2700 lm

watt 24W  
beam angle 120°  
Ø 220 mm

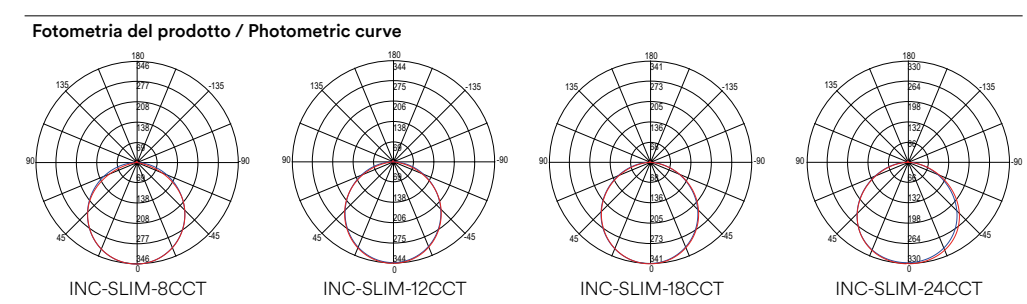


In.tec light **INCASSI / RECESSED LAMPS**

# FLAP CCT


Faretto da incasso con struttura quadrata in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.  
Recessed spotlight with square structure in ultra-thin die-cast aluminum with switch for color temperature regulation.



- Materiale**  
alluminio pressofuso
- Colore**  
bianco
- Temperatura colore selezionabile**  
3000K / 4000K / 6500K
- Driver**  
incluso
- Material**  
die cast aluminum
- Colour**  
white
- Selectable color temperature**  
3000K / 4000K / 6500K
- Driver**  
included





technical information **FLAP CCT**

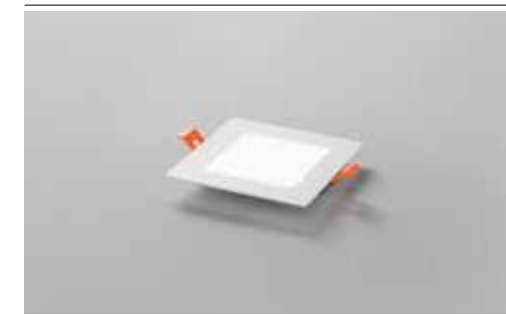



**INC-FLAP-8CCT**  
8031414892273  
lumen 780 lm

watt 8W  
beam angle 120°  
110 × 110 mm





**INC-FLAP-12CCT**  
8031414892242  
lumen 1260 lm

watt 12W  
beam angle 120°  
160 × 160 mm






**INC-FLAP-18CCT**  
8031414892259  
lumen 1980 lm

watt 18W  
beam angle 120°  
205 × 205 mm



**INC-FLAP-24CCT**  
8031414892266  
lumen 2700 lm

watt 24W  
beam angle 120°  
220 × 220 mm

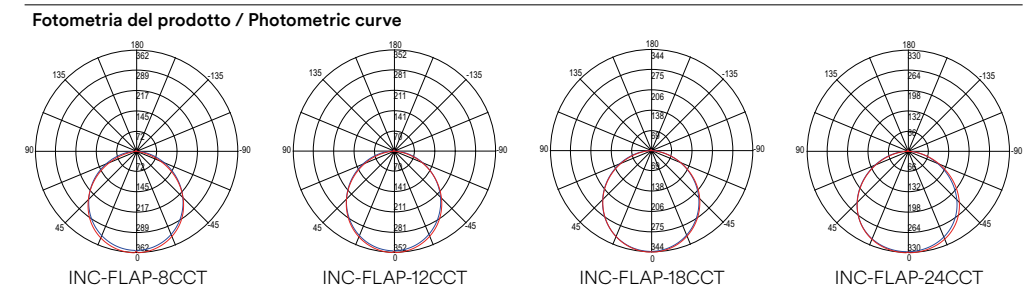

# TOTAL

Incasso in alluminio con diffusore in policarbonato effetto plafoniera con bordi illuminati.  
Built-in aluminum with polycarbonate diffuser with illuminated edges.

**Materiale**  
alluminio + PC

**Colore**  
bianco

**Temperatura colore selezionabile**  
3000K / 4000K / 6500K



**Driver**  
incluso


**Material**  
aluminum + PC

**Colour**  
white

**Selectable color temperature**  
3000K / 4000K / 6500K



**Driver**  
included




technical information **TOTAL**



**INC-TOTAL-R15**  
8031414893744  
lumen

colour temp. | colour  
1600 lm


watt 15W  
beam angle 120°  
Ø 70 - 115 mm



**INC-TOTAL-R24**  
8031414893751  
lumen

colour temp. | colour  
2680 lm


watt 24W  
beam angle 120°  
Ø 110 - 160 mm




**INC-TOTAL-R30**  
8031414893768  
lumen

colour temp. | colour  
3300 lm


watt 30W  
beam angle 120°  
Ø 130 - 200 mm




Fotometria del prodotto / Photometric curve



INC-TOTAL-R15



INC-TOTAL-R24




INC-TOTAL-R30

# PLUS

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco.

Recessed spotlight with aluminum frame and matt white acrylic diffuser.

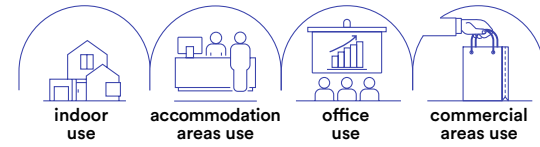

technical information **PLUS**



**Materiale**  
struttura in alluminio  
diffusore in acrilico

**Colore**  
bianco opaco

**Temperatura colore**  
4000K

**Driver**  
incluso

**Material**  
aluminum structure,  
acrylic diffuser

**Colour**  
satin white

**Colour temperature**  
4000K

**Driver**  
included



**INC-PLUS-R8M**  
8031414876105  
lumen

colour temp.	colour
780 lm	




watt	8W
beam angle	120°
pf	-
	Ø 75 mm



**INC-PLUS-R20M**  
8031414876136  
lumen

colour temp.	colour
2220 lm	



watt	20W
beam angle	120°
pf	-
	Ø 155 mm




**INC-PLUS-R30M**  
8031414876167  
lumen

colour temp.	colour
3420 lm	




watt	30W
beam angle	120°
pf	0.90
	Ø 205 mm


Fotometria del prodotto / Photometric curve



INC-PLUS-R8M



INC-PLUS-R20M




INC-PLUS-R30M




# SNIPER

Faretto da incasso con struttura in fibre di plastica e punto luce orientabile.

Recessed spotlight with plastic fibre structure and adjustable light point.

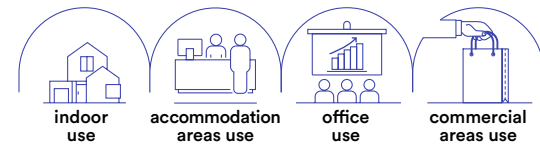

- Materiale**  
PC
- Colore**  
bianco
- Temperatura colore selezionabile**  
3000K / 4000K / 6500K
- Driver**  
integrato
- Material**  
PC
- Colour**  
white
- Selectable color temperature**  
3000K / 4000K / 6500K
- Driver**  
built-in



**INC-SNIPER-QR90**  
8031414888719

lumen 660 lm

watt 7W

beam angle 38°

Ø 70 mm

**Accessori inclusi / Included accessories**

due ghiera intercambiabili  
1 rotonda 1 quadrata /  
interchangeable ring

INC-SNIPER-QR90

95x95 mm

53 mm

**INC-SNIPER-QR120**  
8031414888726

lumen 1165 lm

watt 12W

beam angle 38°

Ø 90 mm

**Accessori inclusi / Included accessories**

due ghiera intercambiabili  
1 rotonda 1 quadrata /  
interchangeable ring

INC-SNIPER-QR120


117x117 mm

53 mm

# GLOW

Faretto da incasso BBC in PC con punto luce orientabile.

BBC recessed spotlight in PC with adjustable light point.

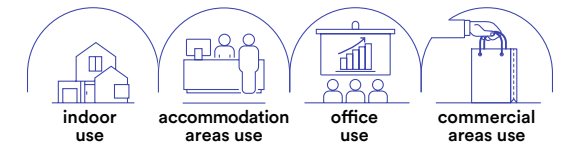

- Materiale**  
PC
- Colore**  
bianco
- Temperatura colore selezionabile**  
2700K / 3000K / 4000K
- Driver**  
integrato
- Material**  
PC
- Colour**  
white
- Selectable color temperature**  
2700K / 3000K / 4000K
- Driver**  
built-in



**INC-GLOW-R90**  
8031414925933

lumen 600 lm

watt 6W

beam angle 68°

Ø 68 mm

**Accessori inclusi / Included accessories**

INC-GLOW-R90

Ø 68 mm


46,7 mm

INCASSI / RECESSED LAMPS


In.tec light

# POLARIS

Faretto da incasso con struttura in alluminio e punto luce orientabile.  
Recessed spotlight with aluminum structure and adjustable light point.

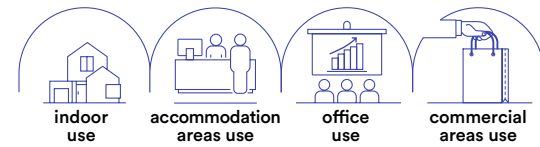


- Materiale**  
alluminio
- Colore**  
bianco goffrato  
silver goffrato
- Temperatura colore**  
4000K
- Driver**  
incluso
- Durata e on/off**  
25.000 h  
>10.000 on/off
- Material**  
aluminum
- Colour**  
embossed white  
embossed silver
- Colour temperature**  
4000K
- Driver**  
included
- Life time and on/off**  
25.000 h  
>10.000 on/off



<b>INC-POLARIS-R3 BCO</b> 8031429681169	colour temp.	colour	
lumen	300 lm		
<b>INC-POLARIS-R3</b> 8031432041196	colour temp.	colour	
lumen	300 lm		

INC-POLARIS R3  
watt 3W  
beam angle 24°  
Ø 55 mm

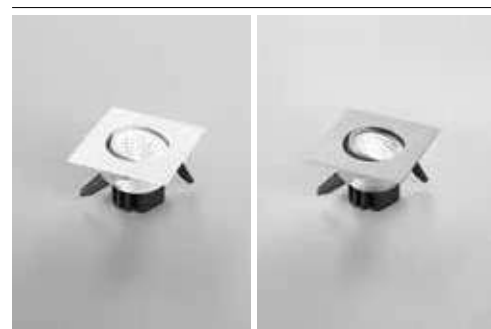


<b>INC-POLARIS-Q3 BCO</b> 8031429761168	colour temp.	colour	
lumen	300 lm		
<b>INC-POLARIS-Q3</b> 8031432051195	colour temp.	colour	
lumen	300 lm		


INC-POLARIS Q3  
watt 3W  
beam angle 24°  
Ø 55 mm

# ORIONE

Faretto da incasso in alluminio nei colori bianco goffrato o silver goffrato.  
Recessed aluminum spotlight in white or embossed silver.

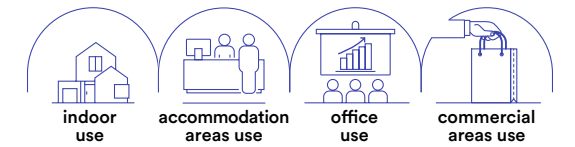

- Materiale**  
alluminio
- Colore**  
bianco goffrato  
silver goffrato
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
embossed white  
embossed silver
- Colour temperature**  
4000K
- Driver**  
included



<b>INC-ORIONE-R6 BCO</b> 8031429771167	colour temp.	colour	
lumen	650 lm		
<b>INC-ORIONE-R6</b> 8031432021198	colour temp.	colour	
lumen	650 lm		

INC-ORIONE R6  
watt 7W  
beam angle 87°  
Ø 75 mm




<b>INC-ORIONE-Q6 BCO</b> 8031434361216	colour temp.	colour	
lumen	650 lm		
<b>INC-ORIONE-Q6</b> 8031432031197	colour temp.	colour	
lumen	650 lm		

INC-ORIONE Q6  
watt 7W  
beam angle 87°  
Ø 75 mm

# FUSION

Faretto da incasso in alluminio con finitura in nikel, bianco satinato o oro.  
Recessed aluminum spotlight with nikel, satin white or gold finish.

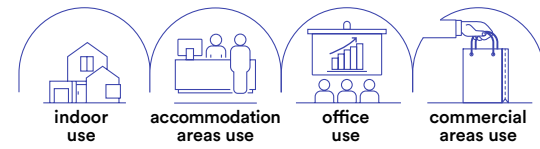

technical information **FUSION**




- Materiale**  
alluminio
- Colore**  
bianco satinato  
nikel  
oro
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
white  
nikel  
gold
- Colour temperature**  
4000K
- Driver**  
built-in



## 1 pz / 1 pcs




	colour temp.	colour
<b>INC-FUSION-5W BCO</b> 8031440361736 lumen	4000K	white
<b>INC-FUSION-5W NIK</b> 8031440361705 lumen	4000K	nikel
<b>INC-FUSION-5W ORO</b> 8031440361712 lumen	4000K	gold
watt	5W	
beam angle	120°	
	Ø 60 mm	




## Kit 3 pz / Kit 3 pcs



	colour temp.	colour
<b>INC-FUSION-3X5W BCO</b> 8031440353335 lumen	4000K	white
<b>INC-FUSION-3X5W NIK</b> 8031440353342 lumen	4000K	nikel
<b>INC-FUSION-3X5W ORO</b> 8031440353359 lumen	4000K	gold
watt	3 × 5W	
beam angle	120°	
	Ø 60 mm	



### Fotometria del prodotto / Photometric curve




INC-FUSION 5W


Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

# BLITZ

Lampada sottopensile kit 3pz con struttura in alluminio in policarbonato bianco opaco.  
Cabinet ceiling lamp kit 3pz with aluminum structure in opal white polycarbonate.



- Materiale**  
struttura in alluminio  
diffusore in pc
- Colore**  
bianco opaco
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
aluminum structure with PC diffuser
- Colour**  
satin white and silver reflector
- Colour temperature**  
4000K
- Driver**  
included




Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

Accessori inclusi / Included accessories



x3  
Driver + morsettiera con cavo 1,5m / Driver + connector with 1,5m cable included




Kit 3 pz / Kit 3 pcs



**LED-BLITZ-R3**  
8031440353274  
lumen


colour temp.	colour
350 lm	

watt	3 x 5W
beam angle	105°




# NEMO

Lampada sottopensile da incasso con struttura in termoplastica con finitura in bianco o silver.  
Recessed cabinet lamp with thermoplastic structure with white or silver finish.

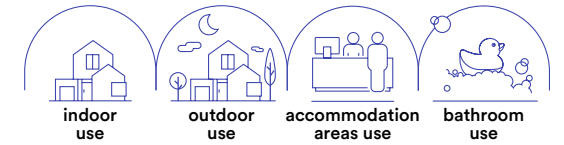

- Materiale**  
struttura in termoplastica
- Colore**  
bianco  
silver
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
thermoplastic structure
- Colour**  
white  
silver
- Colour temperature**  
4000K
- Driver**  
built-in




**INC-NEMO-65 BCO**  
8031414877065  
lumen

colour temp.	colour
277 lm	

**INC-NEMO-65 SIL**  
8031414877072  
lumen


colour temp.	colour
277 lm	

watt	3,5W
beam angle	120°
	Ø 55 mm



# RAINBOW

Faretto da incasso in alluminio in bianco o cromato.  
Recessed aluminum spotlight in white or chromed.

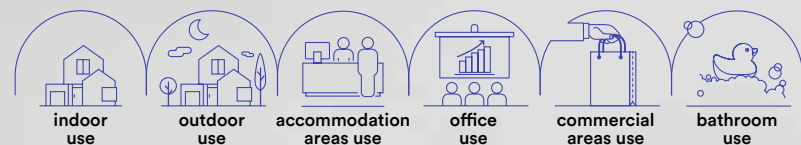

**Materiale**  
alluminio

**Colore**  
bianco  
cromo



**Temperatura colore**  
RGB + 4000K



**Driver**  
DC 12V  
tensione costante  
non incluso

**Material**  
aluminum

**Colour**  
white  
chrome




**Colour temperature**  
RGB + 4000K




**Driver**  
DC 12V  
constant voltage  
not included





EASY  
DOMOTICA



	colour temp.	colour
<b>INC-RAINBOW-M BCO</b> 8031414862627	110 lm	
<b>INC-RAINBOW-M</b> 8031414862603	110 lm	
<b>watt</b>	5W	
<b>beam angle</b>	120°	
	Ø 90 mm	




**Sistema di connessione / Connection system**  
Driver pag. 843-852  
Controller pag. 854-857



INC-RAINBOW 4000K

# ZENIT

Faretto da incasso orientabile con struttura in policarbonato e finitura in nikel, bianco satinato, cromo o oro.  
Adjustable recessed spotlight with polycarbonate structure and nikel, satin white, chrome or gold finish.

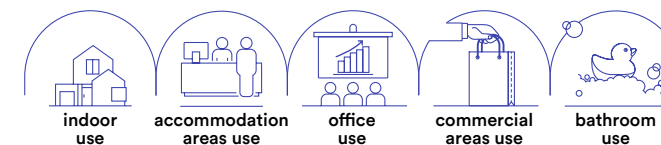

**Materiale**  
policarbonato

**Colore**  
bianco satinato  
nikel  
cromo  
oro



**Temperatura colore**  
3000K



**Driver**  
integrato

**Material**  
polycarbonate

**Colour**  
satin white  
nikel  
chrome  
gold finish




**Colour temperature**  
3000K




**Driver**  
built-in



	colour temp.	colour
<b>INC-ZENIT-5W BCO</b> 8031439881276	390 lm	
<b>INC-ZENIT-5W NIK</b> 8031439901271	390 lm	
<b>INC-ZENIT-5W CR</b> 8031439891275	390 lm	
<b>INC-ZENIT-5W ORO</b> 8031439911270	390 lm	
<b>watt</b>	5W	
<b>beam angle</b>	120°	
	Ø 65 mm	




INC-ZENIT 5W



# QUANTUM

Faretto da incasso con struttura in alluminio nelle versioni bianco e nero satinato. Recessed spotlight with aluminum structure in white and satin black versions.

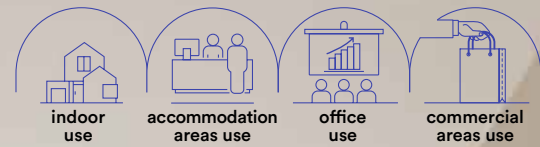

**Materiale**  
alluminio + PC

**Colore**  
bianco satinato  
nero satinato



**Temperatura colore selezionabile**  
3000K / 4000K / 6500K



**Driver**  
integrato

**Material**  
aluminum + PC

**Colour**  
satin white  
satin black



**Selectable color temperature**  
3000K / 4000K / 6500K



**Driver**  
built-in



technical information **QUANTUM**



DALI		colour temp.	colour
	<b>INC-QUANTUM-R18DA-BCO</b> 8031414923878		
	lumen	2350 lm	
	<b>INC-QUANTUM-R18-NER</b> 8031414923908		
	lumen	2350 lm	
watt	18W		
beam angle	60°		
pf	-		
	Ø 120 mm		




DALI		colour temp.	colour
	<b>INC-QUANTUM-R30DA-BCO</b> 8031414923885		
	lumen	4200 lm	
	<b>INC-QUANTUM-R30DA-NER</b> 8031414923915		
	lumen	4200 lm	
watt	30W		
beam angle	60°		
pf	0.90		
	Ø 140 mm		




DALI		colour temp.	colour
	<b>INC-QUANTUM-R40DA-BCO</b> 8031414923892		
	lumen	5500 lm	
	<b>INC-QUANTUM-R40DA-NER</b> 8031414923922		
	lumen	5500 lm	
watt	40W		
beam angle	60°		
pf	0.90		
	Ø 165 mm		


DALI		colour temp.	colour
	<b>INC-QUANTUM-R18-BCO</b> 8031414893683		
	lumen	2000 lm	
	<b>INC-QUANTUM-R18-NER</b> 8031414893713		
	lumen	2000 lm	
watt	18W		
beam angle	60°		
pf	-		
	Ø 120 mm		






DALI		colour temp.	colour
	<b>INC-QUANTUM-R30-BCO</b> 8031414893690		
	lumen	3300 lm	
	<b>INC-QUANTUM-R30-NER</b> 8031414893720		
	lumen	3300 lm	
watt	30W		
beam angle	60°		
pf	0.90		
	Ø 140 mm		



DALI		colour temp.	colour
	<b>INC-QUANTUM-R40-BCO</b> 8031414893706		
	lumen	4300 lm	
	<b>INC-QUANTUM-R40-NER</b> 8031414893737		
	lumen	4300 lm	
watt	40W		
beam angle	60°		
pf	0.90		
	Ø 165 mm		




Fotometria del prodotto / Photometric curve



# HORUS

Faretto da incasso dimmerabile con struttura in policarbonato bianco opaco.  
Dimmable recessed spotlight with matt white polycarbonate structure.

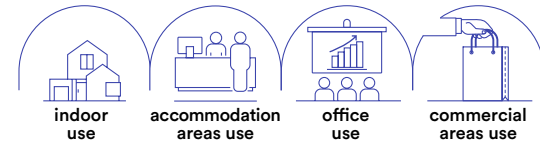


technical information **HORUS**




- Materiale**  
policarbonato
- Colore**  
bianco opaco
- Temperatura colore**  
4000K
- Dimmer**  
dimmer 1-10
- Driver**  
integrato
- Material**  
polycarbonate
- Colour**  
matt white
- Colour temperature**  
4000K
- Dimmer**  
dimmable 1-10
- Driver**  
built-in




<b>INC-HORUS-10W</b> 8031440363501	colour temp.	colour
lumen	1050 lm	
watt	10W	
beam angle	100°	
pf	-	
	Ø 90 mm	




<b>INC-HORUS-15W</b> 8031440363518	colour temp.	colour
lumen	1900 lm	
watt	15W	
beam angle	100°	
pf	-	
	Ø 120 mm	




<b>INC-HORUS-20W</b> 8031440363464	colour temp.	colour
lumen	2600 lm	
watt	20W	
beam angle	100°	
pf	-	
	Ø 170 mm	



<b>INC-HORUS-25W</b> 8031440363495	colour temp.	colour
lumen	3250 lm	
watt	25W	
beam angle	100°	
pf	0.90	
	Ø 200 mm	



Fotometria del prodotto / Photometric curve

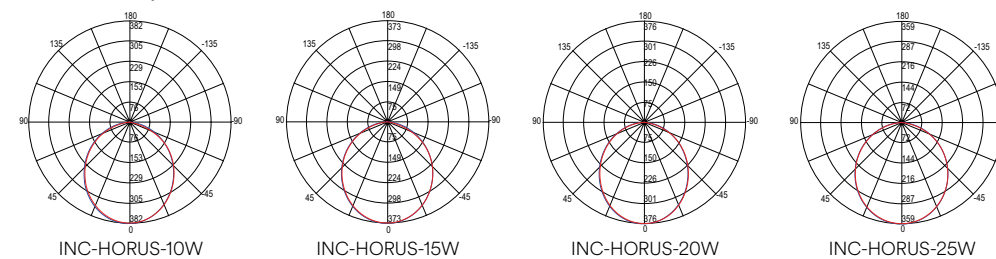

# MATRIX

Faretto da incasso in metallo con lampadina GU10  
inclusa disponibile nei colori bianco, nikel, oro e cromo.  
Recessed metal spotlight with GU10 bulb included  
available in white, nikel, gold and chrome.



**Materiale**  
metallo

**Colore**  
bianco  
nikel  
cromo  
oro



**Temperatura colore**  
3000K



**Material**  
metal

**Colour**  
white  
nikel  
chrome  
gold



**Colour temperature**  
3000K



collection **MATRIX**








Kit 3 pz / Kit 3 pcs

Ø 80 mm



**INC-MATRIX-LEDF3 BCO**  
8031440359320



**INC-MATRIX-LEDF3 NIK**  
8031440359337



3 x GU10

5W LED  
Ø 60 mm



**3 lampadine LED SMD /  
3 LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm



**Staffa con connettore /  
Bracket with connector**

3 pz inclusi / 3 pcs included




**GU10 230V~50Hz  
Portalamпада /  
Lampholder**

3 pz inclusi / 3 pcs included

Kit 3 pz / Kit 3 pcs

Ø 100 mm  
orientabile / adjustable



**INC-MATRIX-LEDM3 BCO**  
8031429651162



**INC-MATRIX-LEDM3 NIK**  
8031431571182



**INC-MATRIX-LEDM3 CR**  
8031440313032



**INC-MATRIX-LEDM3 ORO**  
8031440313025



3 x GU10

5W LED  
Ø 80 mm



**3 lampadine LED SMD /  
3 LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm



**Staffa con connettore /  
Bracket with connector**

3 pz inclusi / 3 pcs included




**Portalamпада /  
Lampholder  
GU10 230V~50Hz**

3 pz inclusi / 3 pcs included

1 pz / 1 pcs

Ø 100 mm  
orientabile / adjustable



**INC-MATRIX-LEDM1 BCO**  
8031440313063



**INC-MATRIX-LEDM1 NIK**  
8031440313049



**INC-MATRIX-LEDM1 CR**  
8031440313056



**INC-MATRIX-LEDM1 ORO**  
8031440313070



1 x GU10

5W LED  
Ø 80 mm



**Lampadina LED SMD /  
LED SMD light bulb**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	413 lm



**Staffa con connettore /  
Bracket with connector**

3 pz inclusi / 3 pcs included




**Portalamпада /  
Lampholder  
GU10 230V~50Hz**

3 pz inclusi / 3 pcs included

# TUBEX

**Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante. Punto luce regolabile e orientabile con finitura in bianco o nero goffrato.**  
Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body. Adjustable light point with embossed black or white finish.

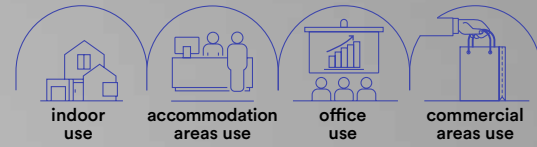

technical information **TUBEX**



**INC-TUBEX-2C-BCO**  
8031414883752  
lumen

colour temp.	colour
190 lm	



**INC-TUBEX-2M-BCO**  
8031414883769  
lumen

colour temp.	colour
190 lm	



**INC-TUBEX-2C-NER**  
8031414883776  
lumen




colour temp.	colour
190 lm	

**INC-TUBEX-2M-NER**  
8031414883783  
lumen


colour temp.	colour
190 lm	

**INC-TUBEX-BASE**  
8031414883745

watt	2,5W
beam angle	30°
	165 x 165 mm



Modular system:  
INC-TUBEX-BASE  
+ INC-TUBEX-2



Staffa regolabile /  
Adjustable bracket

**Materiale**  
gesso e alluminio

**Colore**  
bianco goffrato  
nero goffrato



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
gypsum and aluminum

**Colour**  
embossed white  
embossed black



**Colour temperature**  
3000K / 4000K




**Driver**  
included

# STARRY

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.


Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

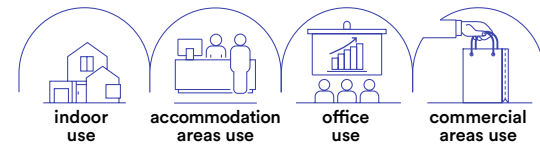

- Materiale**  
gesso  
alluminio
- Colore**  
bianco
- Temperatura colore**  
3000K / 4000K
- Driver**  
incluso
- Material**  
gypsum  
aluminum
- Colour**  
white
- Colour temperature**  
3000K / 4000K
- Driver**  
included





Modular system:  
LED-STARRY +  
INC-STARRY-R1



**LED-STARRY-C**  
8031414884476  
lumen 160 lm

**LED-STARRY-M**  
8031414884483  
lumen 160 lm

watt 2,5W  
beam angle 45°






**INC-STARRY-R1**  
8031414884452  
Ø 75 mm

**INC-STARRY-Q1**  
8031414884469  
75 x 75 mm

# GHOST

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.




Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

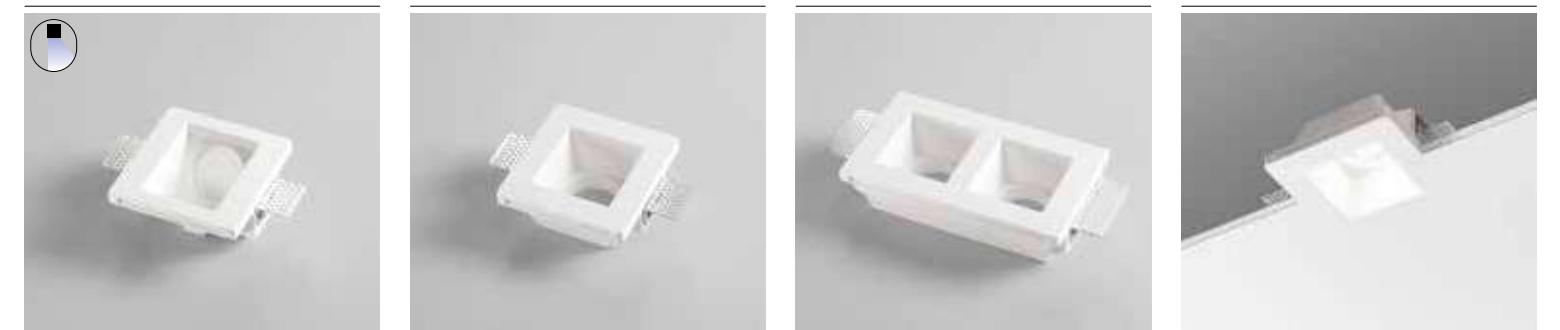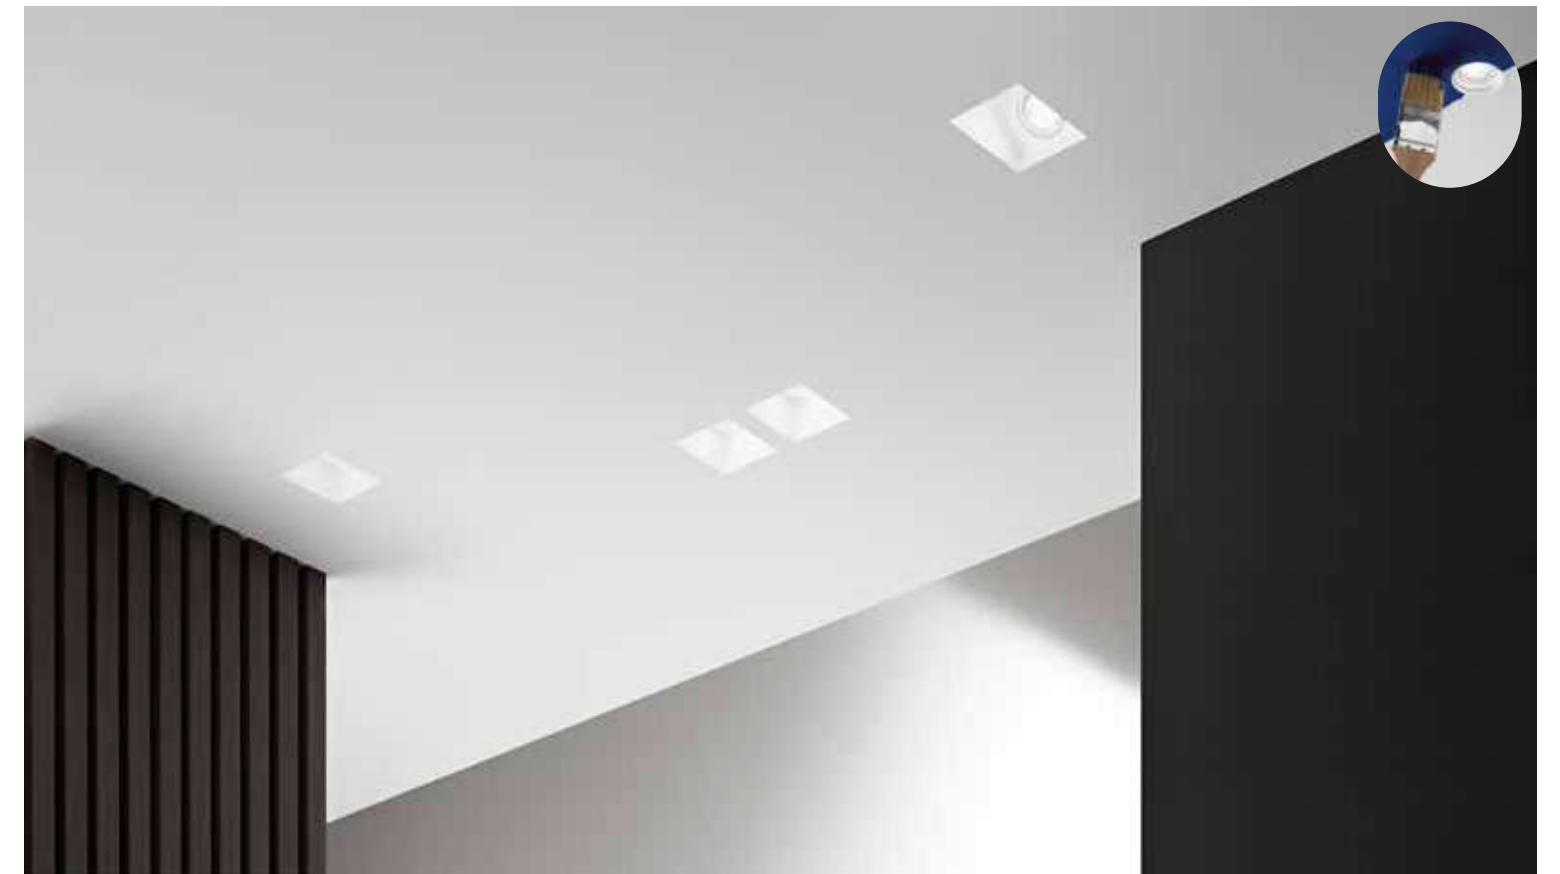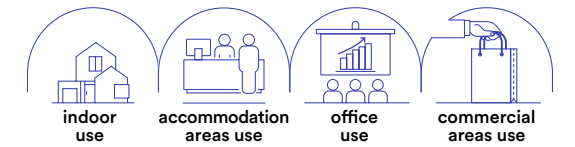

**INC-GHOST-Q1D**  
8031434241211  
1 x GU10 MAX 35W  
125 x 125 mm

**INC-GHOST-Q1**  
8031434261219  
1 x GU10 MAX 35W  
125 x 125 mm

**INC-GHOST-Q2**  
8031434301212  
2 x GU10 MAX 35W  
219 x 123 x 8-15 mm



8/15 mm  
Staffa regolabile /  
Adjustable bracket



Portalamпада incluso /  
Lampholder included

Lampadina non inclusa /  
Light bulb not included


# VULKAN

**Incasso in gesso verniciabili con cilindri intercambiabili e finiture bianco, nero e oro satinato.**

Gypsum down light paintable with interchangeable cylinders and in white, black and satin gold finishes.

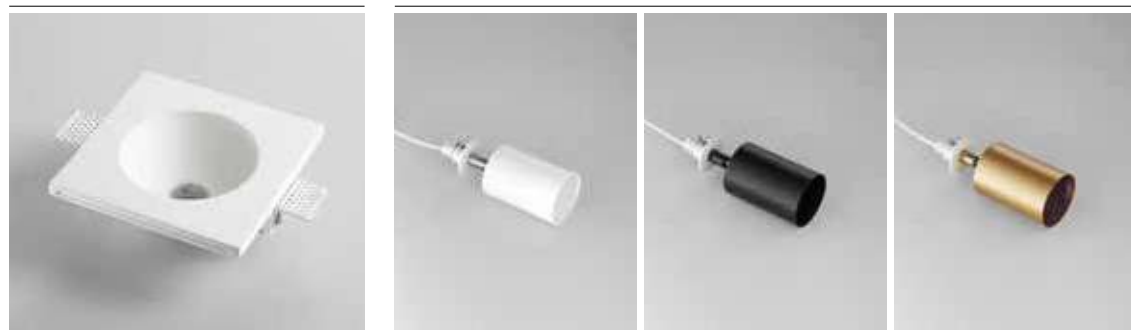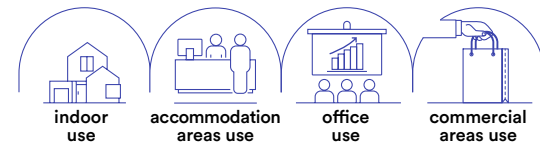

Modular system:  
INC-VULKAN-BASE  
+ INC-VULKAN



Staffa regolabile /  
Adjustable bracket



Portalampana incluso /  
Lampholder included




Lampadina non inclusa /  
Light bulb not included

colour



**INC-VULKAN-BASE**  
8031414883707


1 x GU10 MAX 35W  
170 x 170 mm



**INC-VULKAN-BCO**  
8031414883714

**INC-VULKAN-NER**  
8031414883721


**INC-VULKAN-ORO**  
8031414883738  
1 x GU10 MAX 35W




# ENTITY

**Incasso in gesso verniciabile con ghiera intercambiabili in finiture bianco, oro e cromo.**

Gypsum down light paintable with interchangeable cylinders white, black and satin gold finishes.

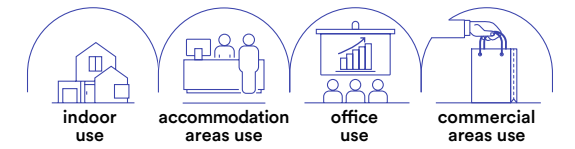

Modular system:  
INC-ENTITY-Q  
+ ENTITY-RING



Staffa regolabile /  
Adjustable bracket



Portalampana incluso /  
Lampholder included




Lampadina non inclusa /  
Light bulb not included

colour



**INC-ENTITY-Q**  
8031414883790

1 x GU10 MAX 10W  
125 x 125 mm




**ENTITY-RING-CR**  
8031414883813

**ENTITY-RING-NER**  
8031414883820

**ENTITY-RING-ORO**  
8031414883806  
1 x GU10 MAX 35W

# GOBLET

**Incasso con struttura sporgente in gesso verniciabile e portalampane incluso.**  
Gypsum prominent down light paintable and lamp holder included.

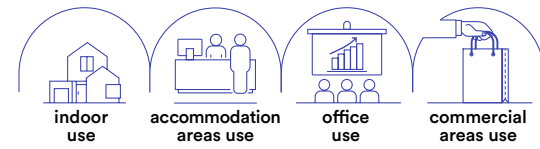



**INC-GOBLET-R**  
8031414882960

1 x GU10 MAX 35W  
Ø 75 mm



**INC-GOBLET-Q**  
8031414882977

1 x GU10 MAX 35W  
Ø 75 mm




Portalampana incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included

# SHADOW

**Incasso con struttura in gesso verniciabile e portalampane incluso.**  
Gypsum downlight paintable and lamp holder included.

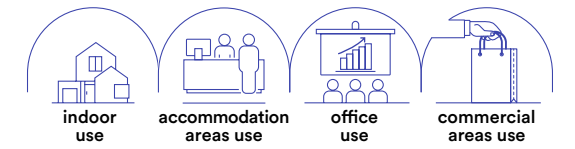



**INC-SHADOW-R**  
8031414882984

1 x GU10 MAX 35W  
Ø 90 mm



**INC-SHADOW-Q**  
8031414882991

1 x GU10 MAX 35W  
Ø 100 mm




Portalampana incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included

# PHANTOM

Incasso con struttura in gesso verniciabile e portalampane incluso.  
Gypsum downlight paintable and lamp holder included.

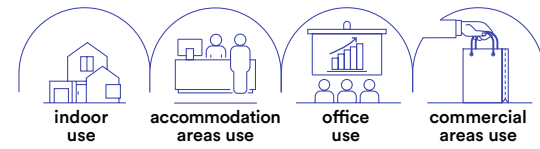



**INC-PHANTOM-R1**  
8031431551184

1x GU10 MAX 35W  
Ø 83 mm



**INC-PHANTOM-Q1**  
8031431561183

1x GU10 MAX 35W  
82 x 82 mm




Portalampane incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included

# SPETTRO

Incasso con struttura in gesso verniciabile e portalampane incluso.  
Gypsum downlight paintable and lamp holder included.

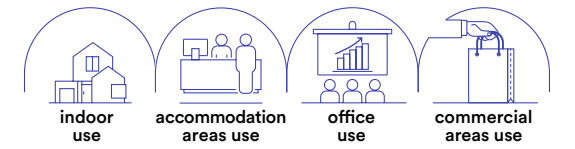



**INC-SPETTRO-R1**  
8031431531186

1x GU10 MAX 35W  
Ø 85 mm



**INC-SPETTRO-Q1**  
8031431541185

1x GU10 MAX 35W  
Ø 95 x 95 mm



Portalampane incluso /  
Lampholder included




Lampadina non inclusa /  
Light bulb not included

# MINI


**Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.**

Recessed gypsum downlight to be integrated into te plasterboard to give homogeneity between the ceiling and the lighting body.

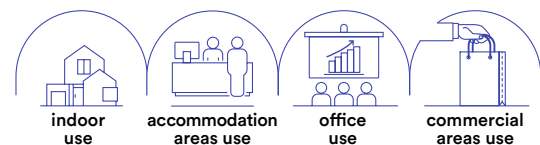


**INC-MINI-R1**  
8031414873623

1 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
 $\varnothing$  73 mm



**INC-MINI-Q1**  
8031414873616

1 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
73 x 73 mm



Portalamпада incluso /  
Lampholder included




Lampadina non inclusa /  
Light bulb not included

# HIVE


**Incasso in gesso verniciabile con 4 punti luce da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.**

Recessed gypsum paintable downlight with 4 light to be integrated into the plasterboard to give homogeneity between ceiling and lighting body.

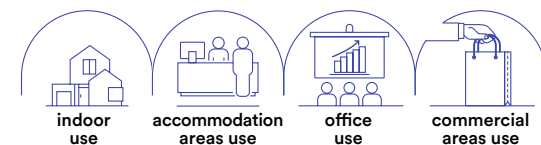

**INC-HIVE-RT4**  
8031414884278

4 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
275 x 125 mm



Staffa regolabile /  
Adjustable bracket



Portalamпада incluso /  
Lampholder included




Lampadina non inclusa /  
Light bulb not included

# SPIRIT


**Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.**

Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

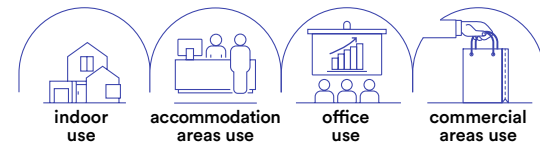

**INC-SPIRIT-R1**  
8031440362177

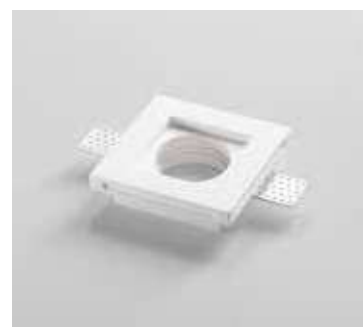

1 x GU10 MAX 35W  
Ø 103 mm





**INC-SPIRIT-Q1**  
8031440362160

1 x GU10 MAX 35W  
103 x 103 mm




-  Portalampada incluso / Lampholder included
-  Lampadina non inclusa / Light bulb not included



# SNOW

**Incasso in gesso verniciabile con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminato.**

Recessed paintable gypsum downlight with satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

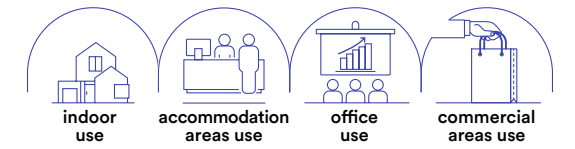



**INC-SNOW-R**  
8031440351607




1 x GU10 MAX 10W  
Ø 125 mm



**INC-SNOW-Q**  
8031440351577

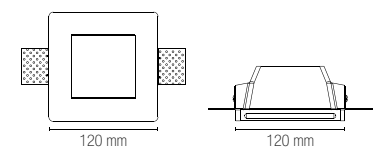1 x GU10 MAX 10W  
125 x 125 mm





-  Staffa regolabile / Adjustable bracket
-  Portalampada incluso / Lampholder included
-  Lampadina non inclusa / Light bulb not included



# MORGANA


**Incasso orientabile in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.**

Adjustable and paintable recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

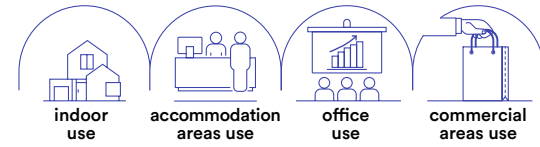


**INC-MORGANA-R1**  
8031434211214

1 x GU10 MAX 35W  
Ø 155 mm





**INC-MORGANA-Q1**  
8031434231212

1 x GU10 MAX 35W  
160 x 160 mm



**INC-MORGANA-Q2**  
8031434201215

2 x GU10 MAX 35W  
260 x 160 mm



Staffa regolabile /  
Adjustable bracket



Portalamпада incluso /  
Lampholder included





Lampadina non inclusa /  
Light bulb not included

# SENSO


**Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.**

Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

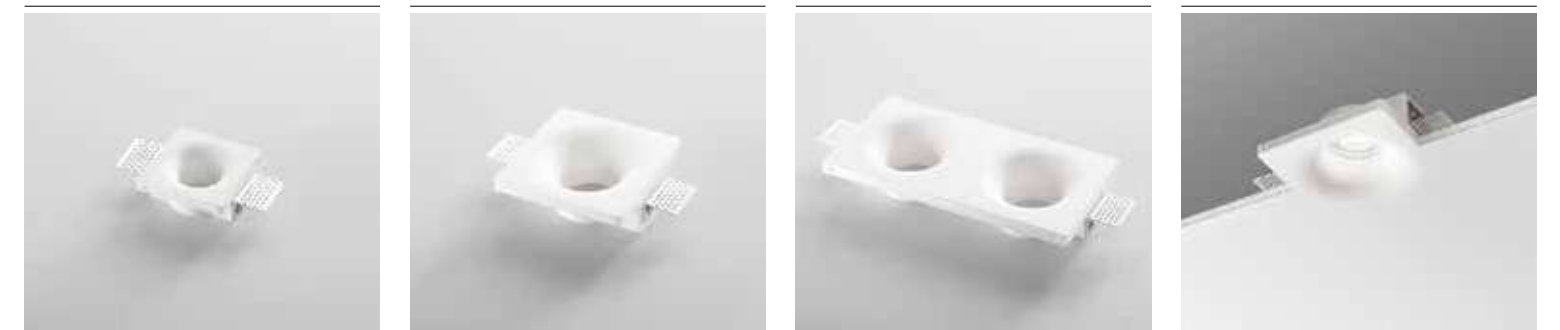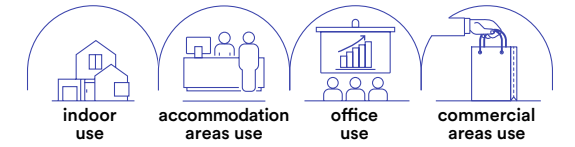


**INC-SENSO-MINI**  
8031414892723

1 x MINI GU10 MAX 10W  
85 x 85 mm





**INC-SENSO-1**  
8031434221213

1 x GU10 MAX 35W  
125 x 125 mm



**INC-SENSO-2**  
8031414873593

2 x GU10 MAX 35W  
243 x 123 mm



Staffa regolabile /  
Adjustable bracket




Portalamпада incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included


# BRICK


**Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante con steli dalle forme modulari che sporgono dalla parete.**  
 Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body with modular stems protruding from the wall.

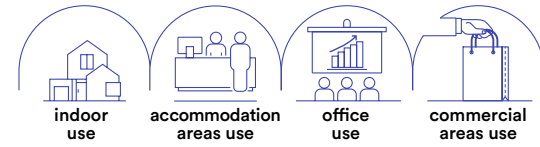


**INC-BRICK-Q1**  
8031414873586

1 x GU10 MAX 35W  
 123 x 123 mm




 Staffa regolabile / Adjustable bracket

 Portalampada incluso / Lampholder included


 Lampadina non inclusa / Light bulb not included


# EVA

**Struttura ad incasso a scomparsa in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.**  
 Recessed structure in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and lighting body.

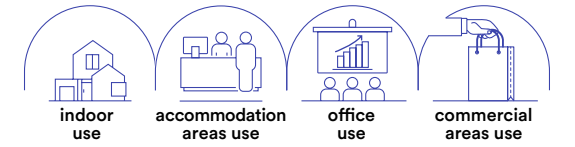


**INC-EVA-R1**  
8031414873609

1 x E27 MAX 35W  
 Ø 185 mm




 Portalampada incluso / Lampholder included

 Lampadina non inclusa / Light bulb not included

# SKILIFT


Sistema componibile da incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.  
Modular recessed system in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

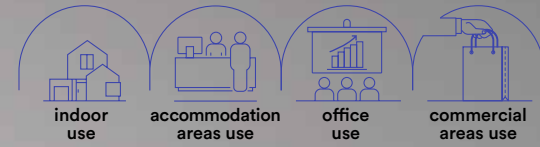


technical information **SKILIFT**




**INC-SKILIFT-40CM**  
8031414884346  
405 x 115 mm




**INC-SKILIFT-20CM**  
8031414884322  
205 x 115 mm




**INC-SKILIFT-L16CM**  
8031414884360  
165 x 165 mm




**INC-SKILIFT-CAP**  
8031414886869  
55 x 115 mm




**INC-SKILIFT-6**  
8031414884339  
6 x MINI GU10 MAX 35W  
bulb size Ø 34 mm  
405 x 115 mm





**INC-SKILIFT-3**  
8031414884315  
3 x MINI GU10 MAX 35W  
bulb size Ø 34 mm  
205 x 115 mm



**INC-SKILIFT-L3**  
8031414884353  
3 x MINI GU10 MAX 35W  
bulb size Ø 34 mm  
165 x 165 mm




-  Portalamпада incluso / Lampholder included
-  Lampadina non inclusa / Light bulb not included

In.tec light INCASSI / RECESSED LAMPS

# ARIEL

Segnapasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.

Paintable gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and lighting body.

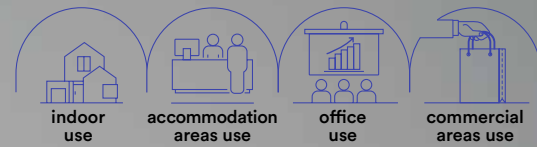


technical information **ARIEL**




**I-ARIEL-QL1**  
8031434151213

1 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
115 x 250 x 12 mm




**I-ARIEL-RM1**  
8031434121216




1 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
125 x 185 x 12 mm




**I-ARIEL-RS1**  
8031434131215

1 x MINI GU10 MAX 35W  
bulb size  $\varnothing$  34 mm  
105 x 105 x 12 mm





-  Staffa regolabile / Adjustable bracket
-  Portalamпада incluso / Lampholder included
-  Lampadina non inclusa / Light bulb not included





**I-ARIEL-QL1-BOX**  
8031414868360

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation




**I-ARIEL-RM1-BOX**  
8031414868384

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation





**I-ARIEL-RS1-BOX**  
8031414868377

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation




# ANIMA

Applique in gesso verniciabile con leggera sporgenza da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.  
Wall lamp in paintable gypsum with slight protrusion to be integrated into the plasterboard to give homogeneity between the part and the illuminating body.

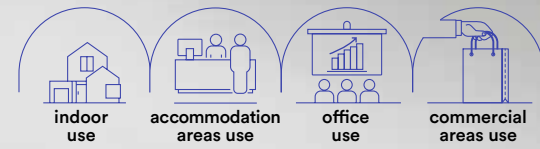

technical information **ANIMA**



Staffa regolabile /  
Adjustable bracket




Portalampada incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included


**I-ANIMA-AP2**  
8031414861323

2 x E14 MAX 14W  
320 x 260 x 90 mm





**I-ANIMA-AP2-BOX**  
8031414868391

Cassa di derivazione opzionale per fissaggio a parete in muratura materiale alluminio / Aluminum optional recess box for brickwork recess installation



# STENOS

Faretto da incasso con struttura in termoplastica orientabile ed antiriflesso.  
Recessed spotlight with adjustable and anti-reflective thermoplastic structure.

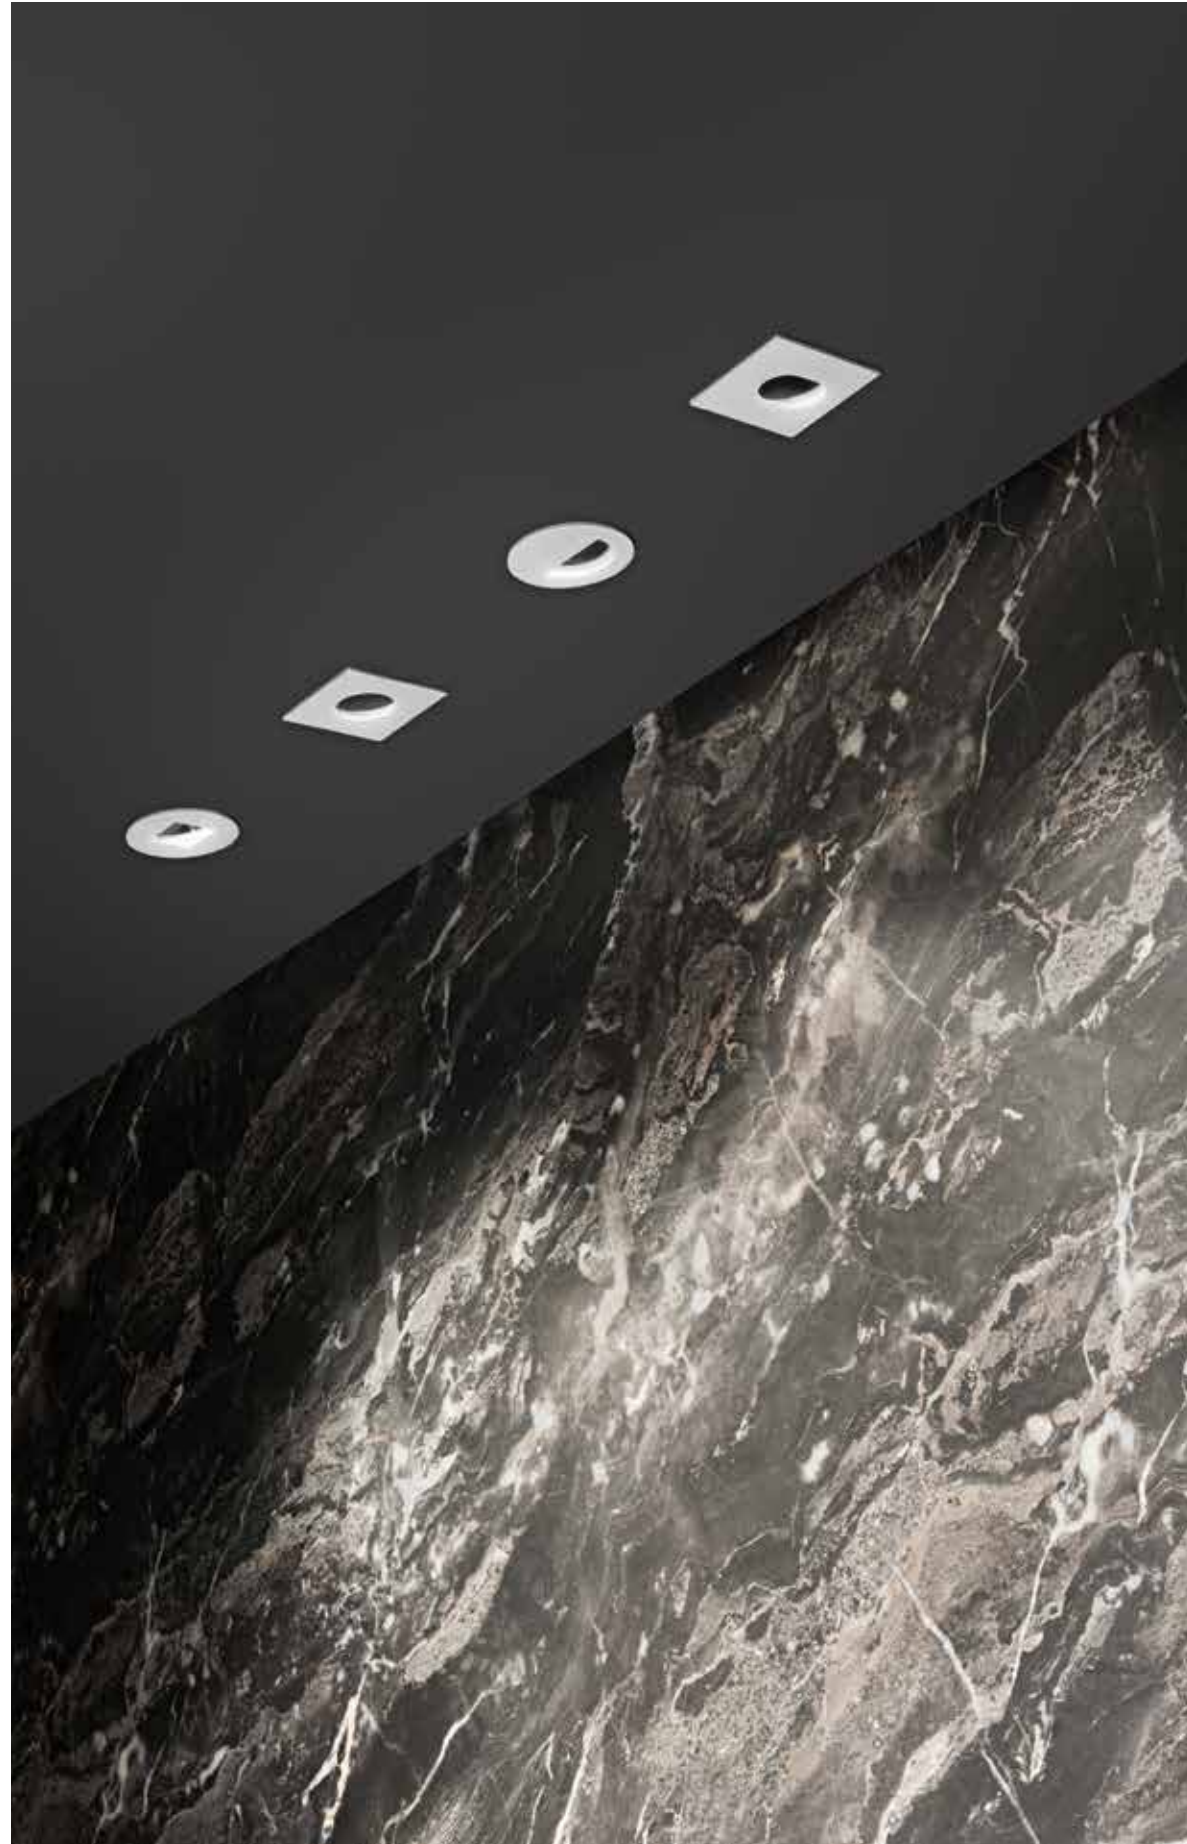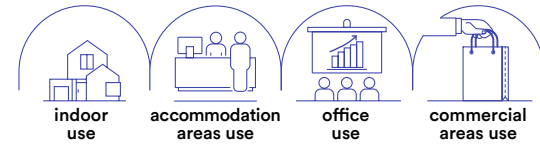

technical information **STENOS**



**INC-STENOS-R-OV**  
8031414875818



**INC-STENOS-Q-OV**  
8031414875856



**INC-STENOS-R-QU**  
8031414875832



**INC-STENOS-Q-QU**  
8031414875870



**INC-STENOS-R-RO**  
8031414875801




**INC-STENOS-Q-RO**  
8031414875849




**INC-STENOS-R-ML**  
8031414875825



**INC-STENOS-Q-ML**  
8031414875863



Ø 75 mm



Ø 75 mm



Lampadina non inclusa / Light bulb not included




Portalamпада GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included



Lampadina non inclusa / Light bulb not included



Portalamпада GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included

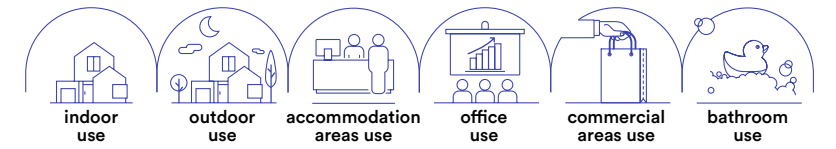

**Faretto con struttura in metallo e diffusore in vetro satinato.**  
Spotlight with metal structure and satin glass diffuser.

- Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included
- Lampadina non inclusa / Light bulb not included



		colour
<b>INC-VIPER-R-BCO</b> 8031414861590		
<b>INC-VIPER-R-NIK</b> 8031414861576		
		Ø 74 mm

- Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included
- Lampadina non inclusa / Light bulb not included



		colour
<b>INC-VIPER-Q-BCO</b> 8031414861866		
<b>INC-VIPER-Q-NIK</b> 8031414861873		
		Ø 74 mm




**Faretto ad incasso antiriflesso in alluminio nero o bianco goffrato.**  
Recessed spotlight with anti-reflective in black or white embossed aluminum.



Portalamпада incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included



**INC-AYRIS-R BCO**  
8031414868216

colour



**INC-AYRIS-R NER**  
8031414868193



1 x GU10 MAX 35W


Ø 75 mm



Portalamпада incluso /  
Lampholder included



Lampadina non inclusa /  
Light bulb not included



**INC-AYRIS-Q BCO**  
8031414868223

colour



**INC-AYRIS-Q NER**  
8031414868186



1 x GU10 MAX 35W

72 x 72 mm




# REFLEX



## Incasso in metallo Metal down light

**INC-REFLEX-SF1 BCO**  
8031439321260

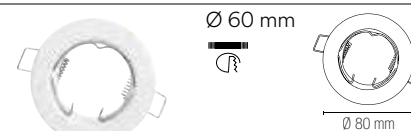

**INC-REFLEX-SF1 NER**  
8031414861552



**INC-REFLEX-SF1 CR**  
8031439301262



**INC-REFLEX-SF1 ORO**  
8031439341268



**INC-REFLEX-SF1 NIK**  
8031439311261



**INC-REFLEX-SF1 BR**  
8031439331269



**INC-REFLEX-Q-SF1 BCO**  
8031414861538



**INC-REFLEX-Q-SF1 NER**  
8031414885053



**INC-REFLEX-Q-SF1 NIK**  
8031414861545



Lampadina  
non inclusa /  
Light bulb  
not included



Portalampada GU10  
o MR16 non inclusi/  
GU10 or MR16 lamp  
holder not included

## Incasso in metallo orientabile Metal down light adjustable



**INC-REFLEX-SM1 BCO**  
8031439251260



**INC-REFLEX-SM1 NER**  
8031414861569



**INC-REFLEX-SM1 CR**  
8031439281267



**INC-REFLEX-SM1 ORO**  
8031439271268




**INC-REFLEX-SM1 NIK**  
8031439261269



**INC-REFLEX-SM1 BR**  
8031439291266



**INC-REFLEX-Q-SM1 BCO**  
8031440363310

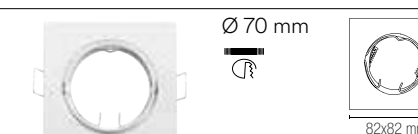

**INC-REFLEX-Q-SM1 NER**  
8031414885060



**INC-REFLEX-Q-SM1 NIK**  
8031440363280




Lampadina  
non inclusa /  
Light bulb  
not included



Portalampada GU10  
o MR16 non inclusi/  
GU10 or MR16 lamp  
holder not included

INDOOR

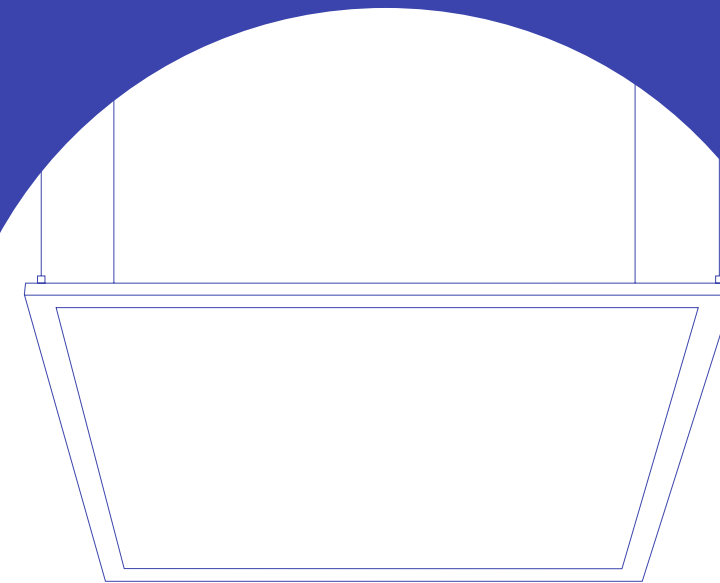

SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE  
MULTI-FUNCTION LIGHTING SYSTEM

# SHAPE

Barre in PC con connettori per composizioni personalizzate.  
PC bars with connectors for customized compositions.

**Materiale**  
PC

**Colore**  
bianco



**Temperatura colore**  
4000K / 6500K



**Driver**  
integrato

**Material**  
PC

**Colour**  
white



**Colour temperature**  
4000K / 6500K



**Driver**  
built-in




collection **SHAPE**






technical information **SHAPE**

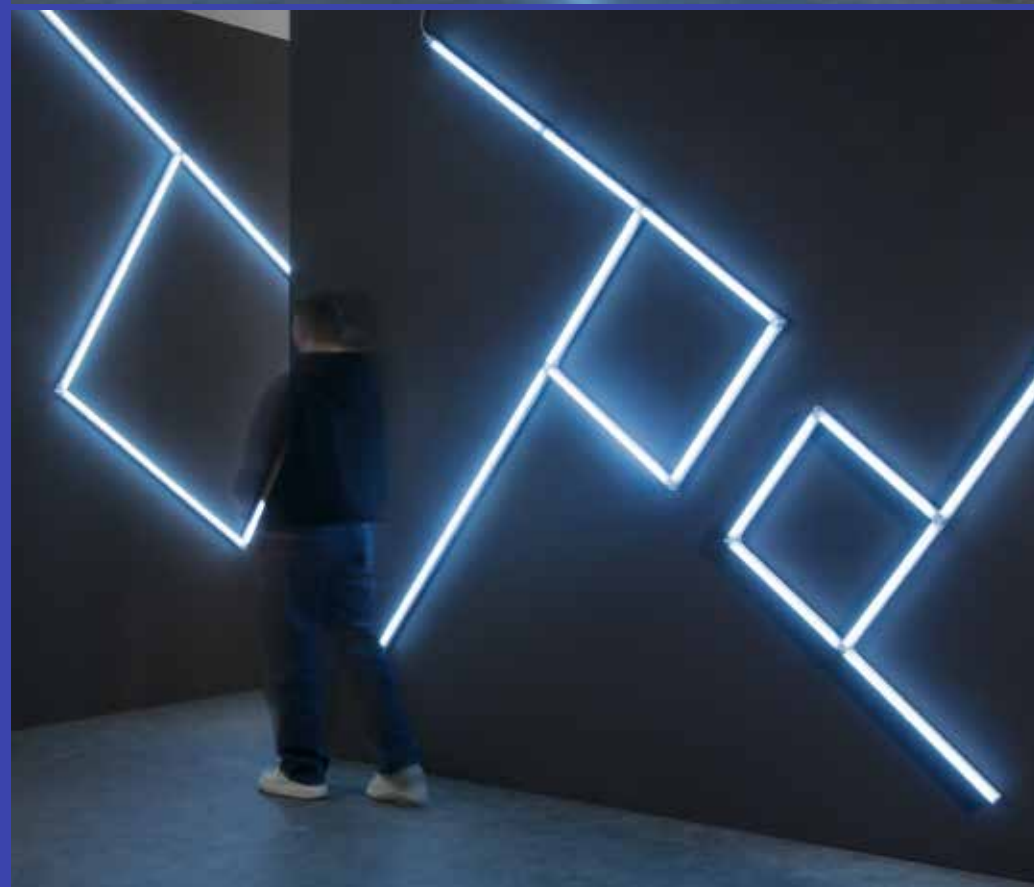

<b>LEDBAR-SHAPE-44M</b> 8031414925384	colour temp.	colour
lumen	700 lm	
<b>LEDBAR-SHAPE-44F</b> 8031414925391	colour temp.	colour
lumen	700 lm	

watt	7W
beam angle	120°




<b>LEDBAR-SHAPE-56M</b> 8031414925407	colour temp.	colour
lumen	900 lm	
<b>LEDBAR-SHAPE-56F</b> 8031414925414	colour temp.	colour
lumen	900 lm	


watt	9W
beam angle	120°



<b>LEDBAR-SHAPE-117M</b> 8031414925421	colour temp.	colour
lumen	1800 lm	
<b>LEDBAR-SHAPE-117F</b> 8031414925438	colour temp.	colour
lumen	1800 lm	

watt	18W
beam angle	120°




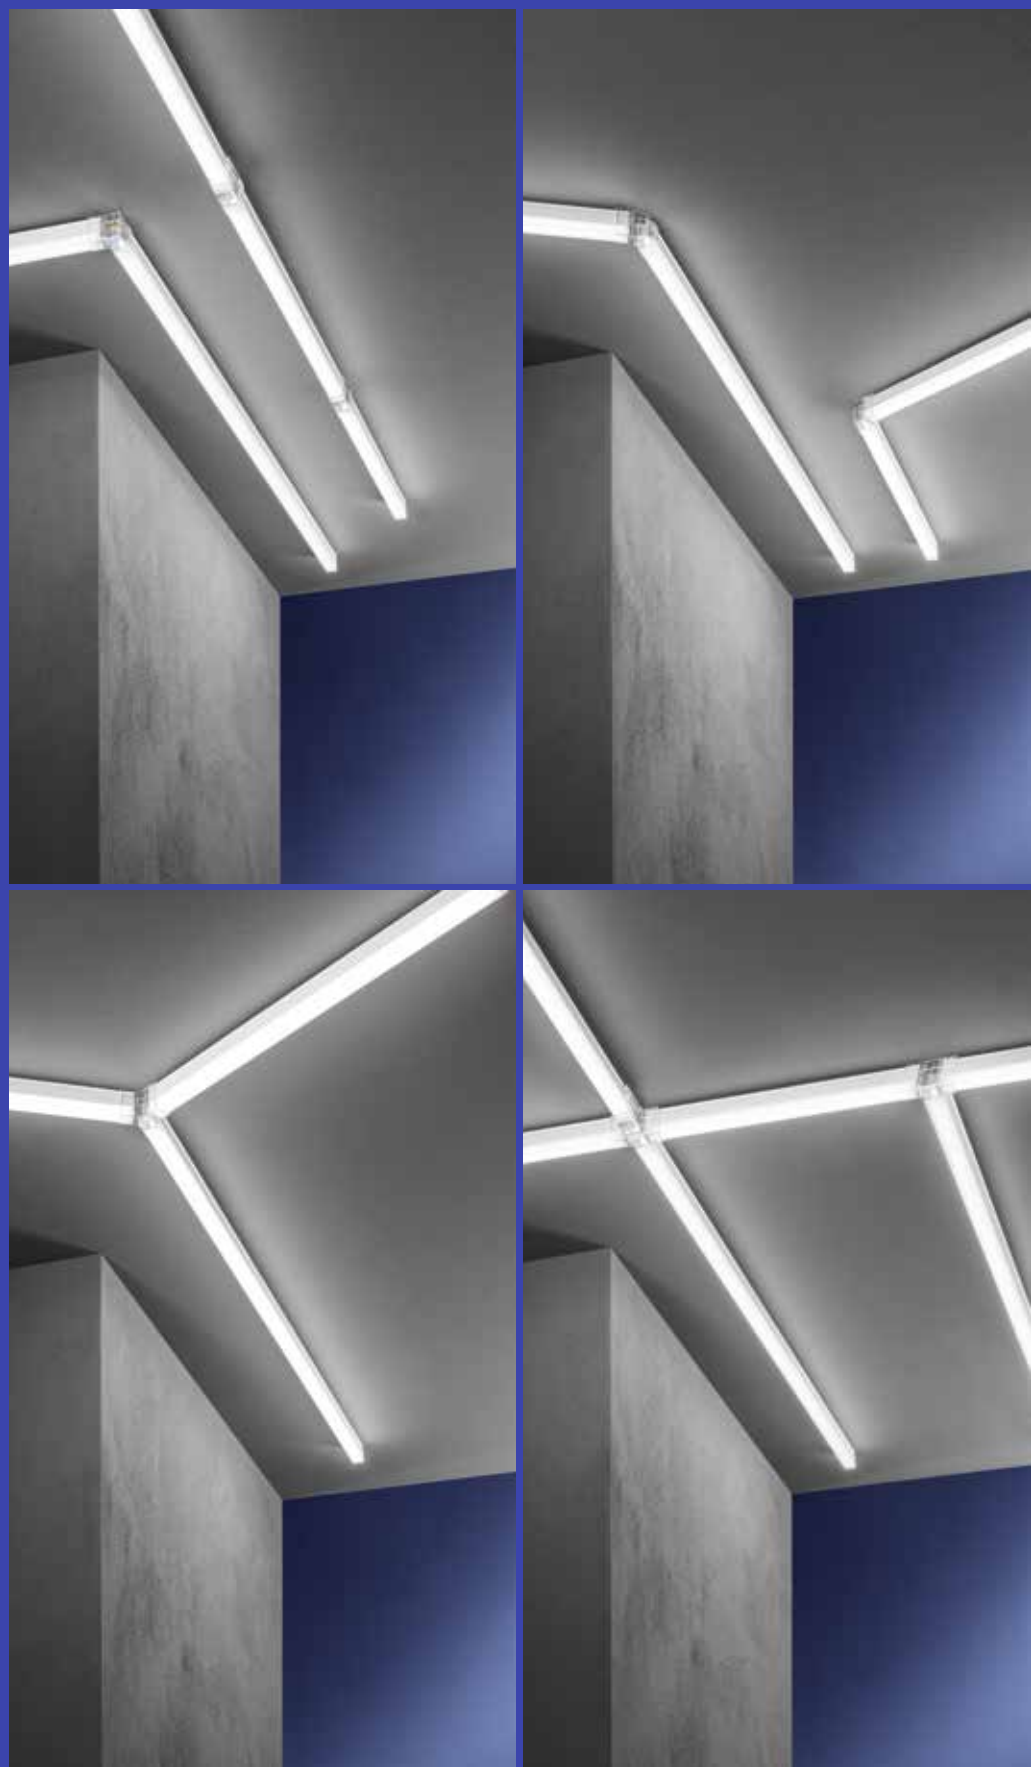

accessories **SHAPE**



**LEDBAR-SHAPE-I**  
8031414925445  
Connettore lineare      Linear connector



**LEDBAR-SHAPE-L**  
8031414925469  
Connettore a L      L connector



**LEDBAR-SHAPE-ANG**  
8031414925452  
Connettore angolo 120°      120° edge connector



**LEDBAR-SHAPE-T**  
8031414925483  
Connettore a T      T connector



**LEDBAR-SHAPE-T120**  
8031414925476  
Connettore a 3 angoli 120°      3 120° edge connector




**LEDBAR-SHAPE-X**  
8031414925490  
Connettore a X      X connector



**LEDBAR-SHAPE-NEST**  
8031414925506  
Innesto elettrico      Electrical nest

# NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.  
Metal LED bar satin white or black finish with antiglare diffuser.

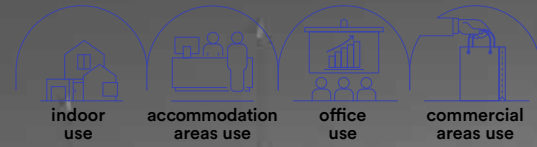

**Materiale**  
metallo

**Colore**  
bianco satinato  
nero satinato



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
metal

**Colour**  
satin white  
satin black



**Colour temperature**  
3000K / 4000K



**Driver**  
included



collection **NEXT**



Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.  
Metal LED bar satin white or black finish with antiglare diffuser.

- Materiale**  
metallo
- Colore**  
bianco satinato  
nero satinato
- Temperatura colore**  
3000K / 4000K
- Driver**  
incluso
- Material**  
metal
- Colour**  
satin white  
satin black
- Colour temperature**  
3000K / 4000K
- Driver**  
included

<p><b>LED-NEXT-W-L</b> 8031414921782 lumen</p> <p>colour temp.   colour 640 lm   3000K / 4000K</p>	<p><b>LED-NEXT-W-T</b> 8031414921768 lumen</p> <p>colour temp.   colour 800 lm   3000K / 4000K</p>	<p><b>LED-NEXT-W-X</b> 8031414921744 lumen</p> <p>colour temp.   colour 960 lm   3000K / 4000K</p>
<p><b>LED-NEXT-B-L</b> 8031414921775 lumen</p> <p>colour temp.   colour 640 lm   3000K / 4000K</p>	<p><b>LED-NEXT-B-T</b> 8031414921751 lumen</p> <p>colour temp.   colour 800 lm   3000K / 4000K</p>	<p><b>LED-NEXT-B-X</b> 8031414921737 lumen</p> <p>colour temp.   colour 960 lm   3000K / 4000K</p>
watt 8W beam angle 100° pf -	watt 10W beam angle 100° pf -	watt 12W beam angle 100° pf -

<p><b>LED-NEXT-W-60</b> 8031414921645 lumen</p> <p>colour temp.   colour 1920 lm   3000K / 4000K</p>	<p><b>LED-NEXT-W-90</b> 8031414921669 lumen</p> <p>colour temp.   colour 2880 lm   3000K / 4000K</p>	<p><b>LED-NEXT-W-200</b> 8031414921683 lumen</p> <p>colour temp.   colour 6400 lm   3000K / 4000K</p>
<p><b>LED-NEXT-B-60</b> 8031414921638 lumen</p> <p>colour temp.   colour 1920 lm   3000K / 4000K</p>	<p><b>LED-NEXT-B-90</b> 8031414921652 lumen</p> <p>colour temp.   colour 2880 lm   3000K / 4000K</p>	<p><b>LED-NEXT-B-200</b> 8031414921676 lumen</p> <p>colour temp.   colour 6400 lm   3000K / 4000K</p>
watt 24W beam angle 100° pf 0.90	watt 36W beam angle 100° pf 0.90	watt 80W beam angle 100° pf 0.90

**Accessori inclusi / Included accessories**

Connettore / Connector

Staffa per montaggio a plafoniera / Ceiling mounting brackets

**Accessori inclusi / Included accessories**

Connettore / Connector

Staffa per montaggio a plafoniera / Ceiling mounting brackets


**Accessori inclusi / Included accessories**

Connettore / Connector

Staffa per montaggio a plafoniera / Ceiling mounting brackets


# NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.  
Metal LED bar satin white or black finish with antiglare diffuser.

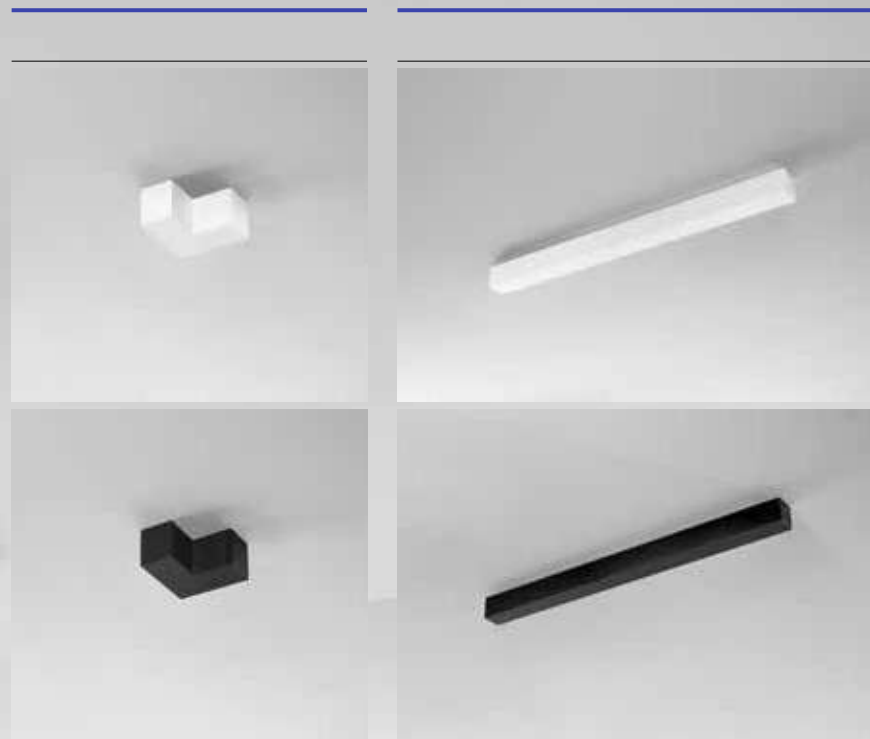

Barre NEXT senza sorgente luminosa per creare "tratti bui" /  
NEXT bar without light source to create "dark lines".

	colour		colour
<b>LED-NEXT-W-ST-L</b> 8031414921720	●	<b>LED-NEXT-W-ST60</b> 8031414921706	●
<b>LED-NEXT-B-ST-L</b> 8031414921713	●	<b>LED-NEXT-B-ST60</b> 8031414921690	●



#### Accessori inclusi / Included accessories

	Connettore / Connector
	Staffa per montaggio a plafoniera / Ceiling mounting brackets

accessories **NEXT**



**LED-NEXT-W-FIX**  
8031414921850  
Staffa per fissaggio bianca White fixing bracket



**LED-NEXT-B-FIX**  
8031414921799  
Staffa per fissaggio nera Black fixing bracket



**LED-NEXT-W-S**  
8031414921812  
Kit sospensione bianco Suspension kit white color





**LED-NEXT-PL-FIX**  
8031414921843  
Kit per fissaggio a plafoniera Ceiling mounting kit






# SEGMENTO

Supporto lineare modulare in acciaio rivestito in silicone nero.  
Modular linear support in steel and coated in black silicone.

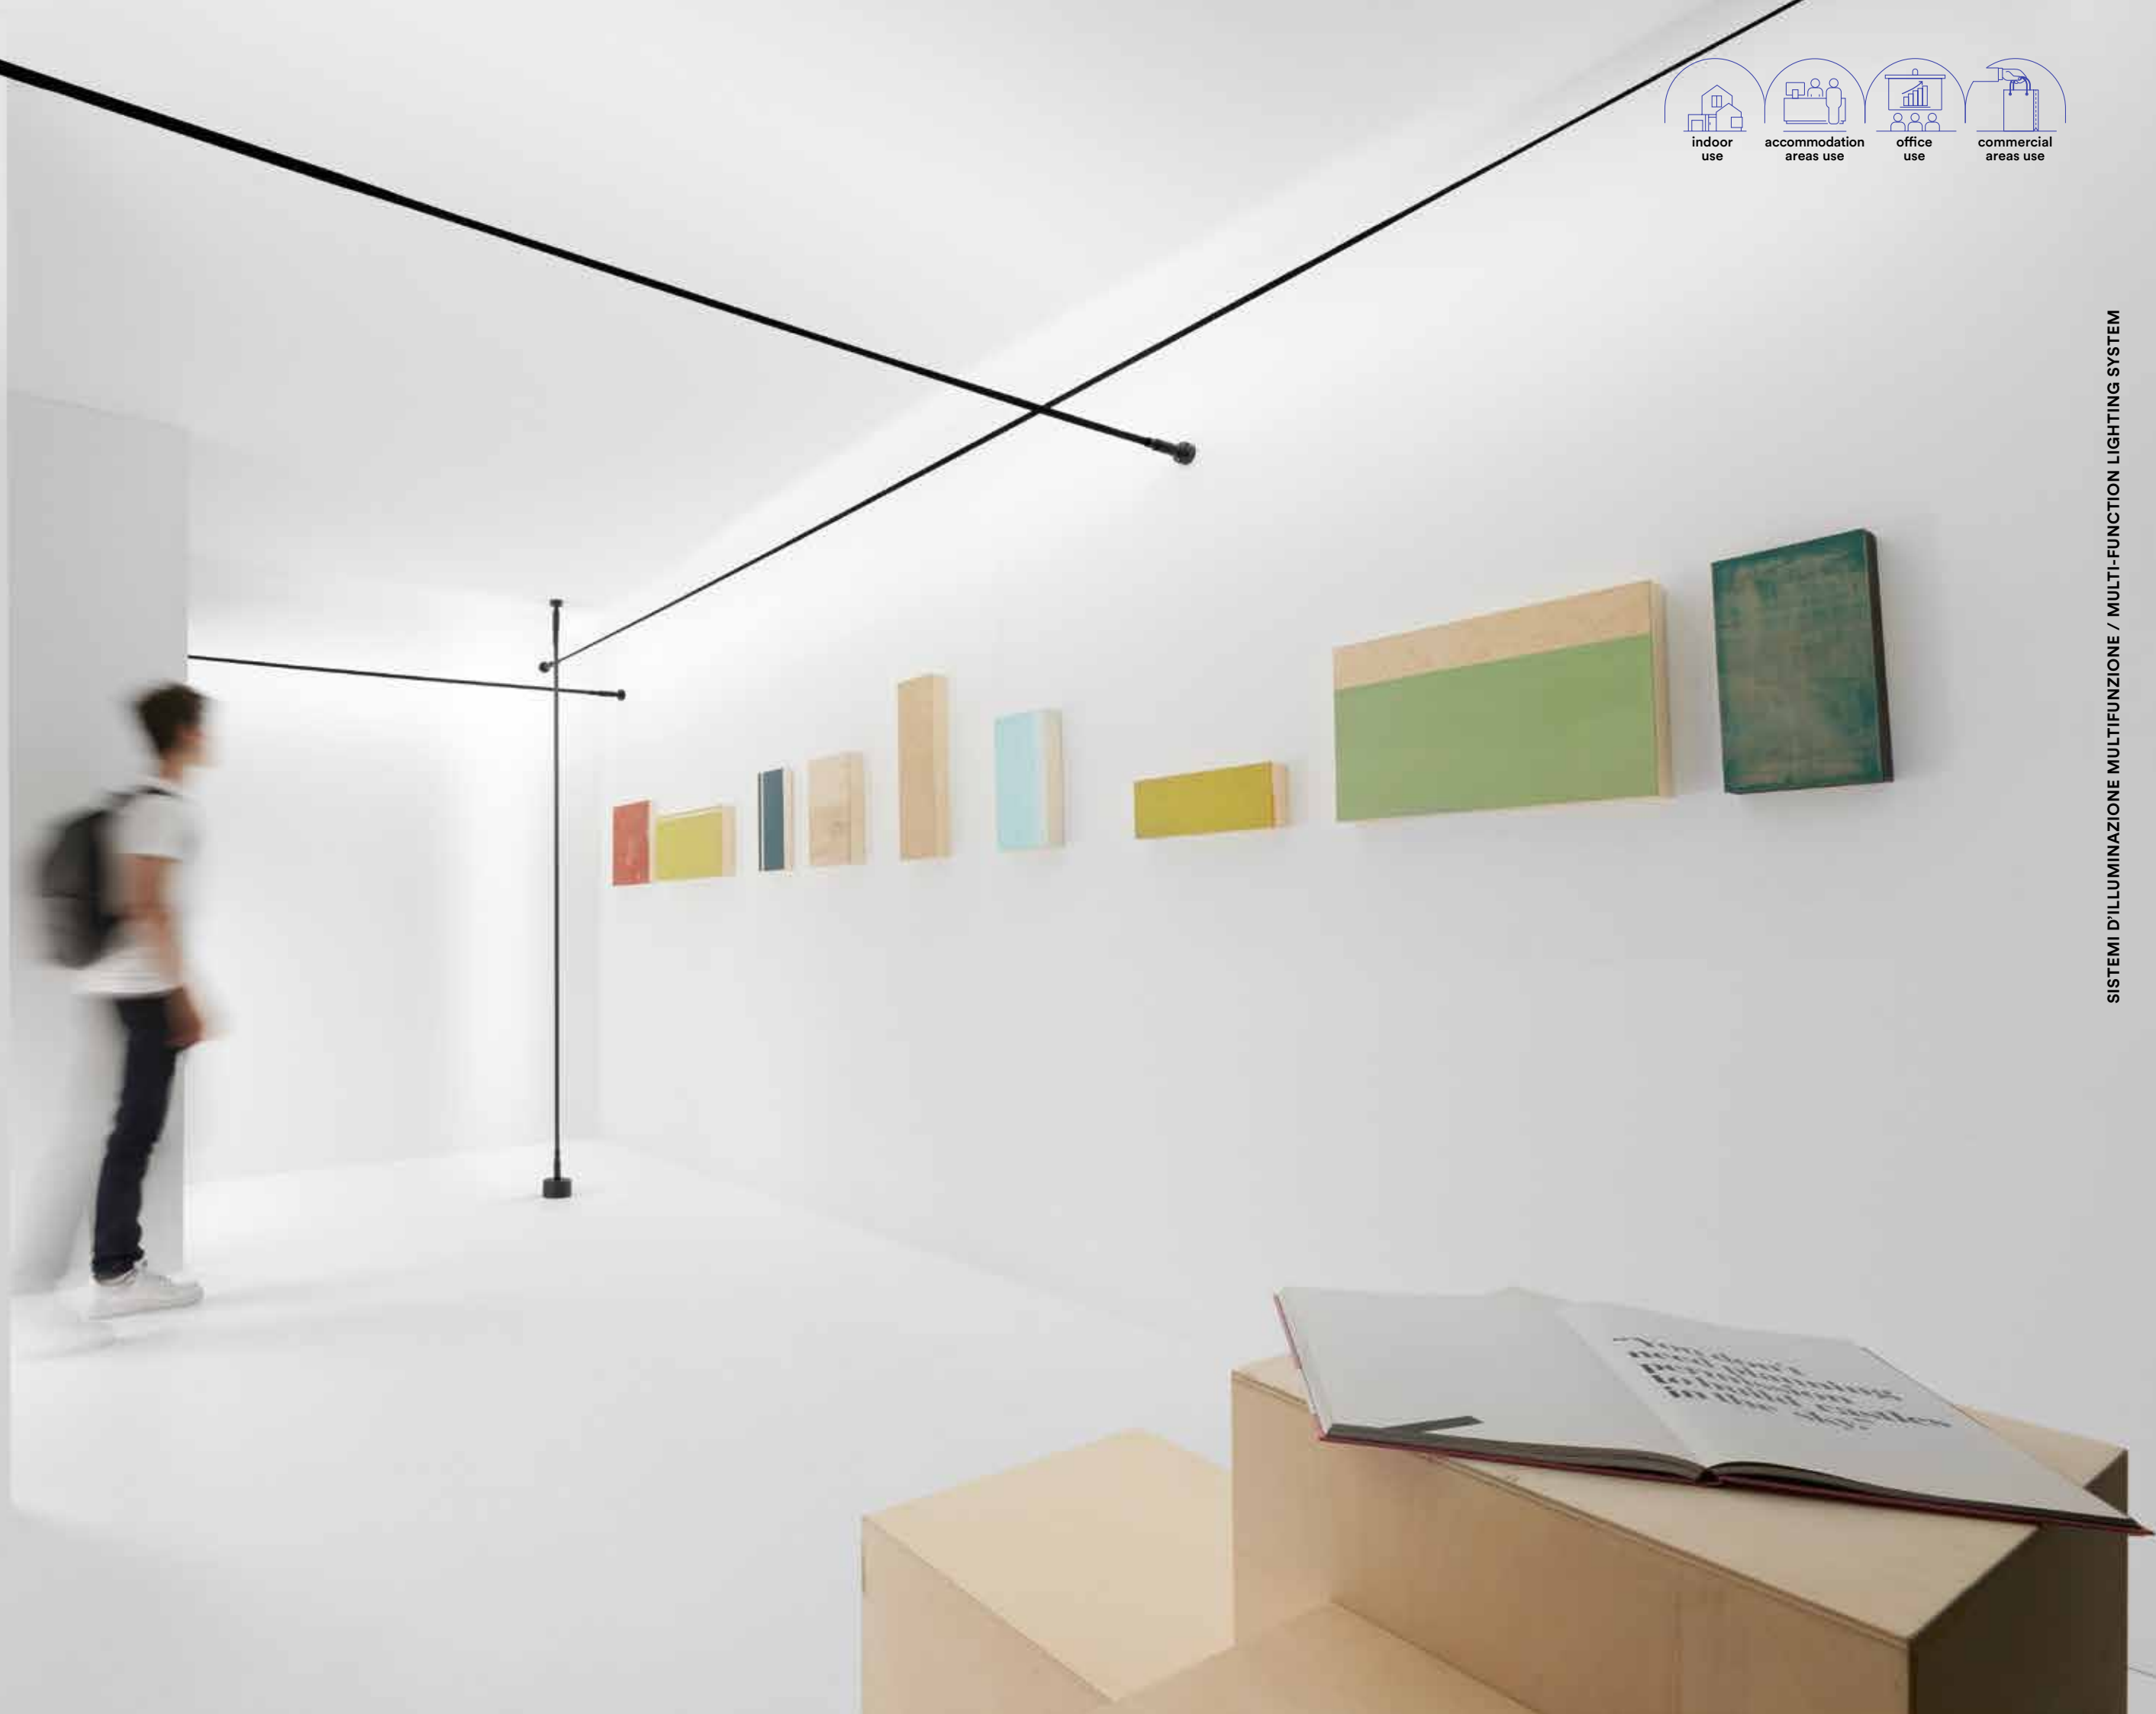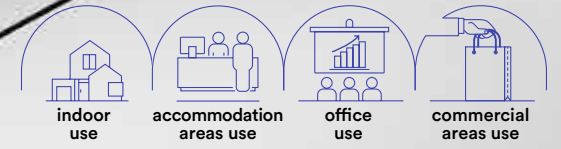

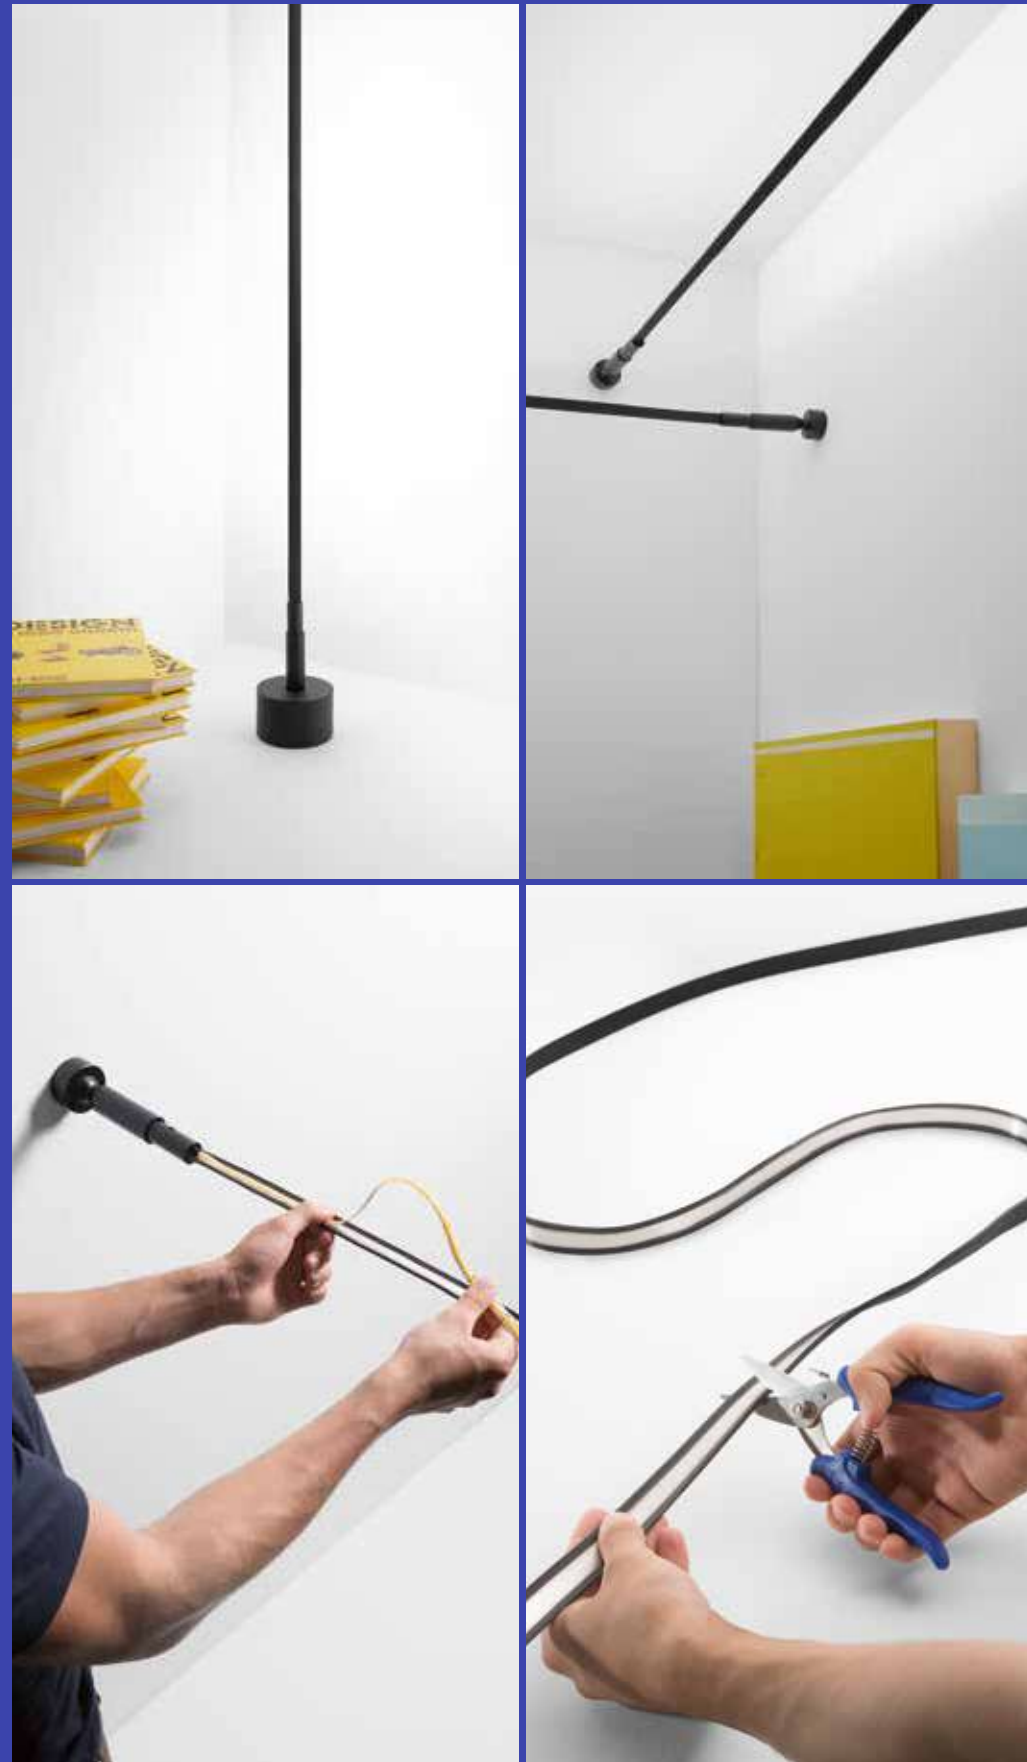

**Supporto lineare modulare in acciaio rivestito in silicone nero.**  
Modular linear support in steel and coated in black silicone.




**Strip LED non inclusa / Strip LED not included**

**Kit completo / Complete kit**



**I-SEGMENTO-6M**  
8031414882458

Kit base 6 m con nastro tagliabile, arnesi, set di 2 basette ed accessori / 6 m basic kit with cuttable ribbon, tool kit, set of 2 bases and accessories

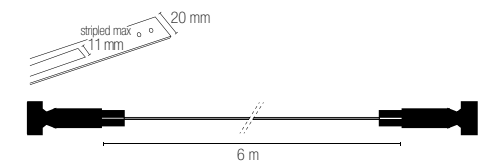


**Elementi singoli per comporre il kit / Single elements to compose the kit**

**Servizio customizzato taglio su misura / Customized cut service**



**I-SEGMENTO-1M**  
8031414882441

TAGLIO 1 M NASTRO Indicare la misura desiderata nelle note del B2B (multipli di 1 metro) / 1 M TAPE CUT Indicate the desired size in the B2B notes (multiples of 1 meter)

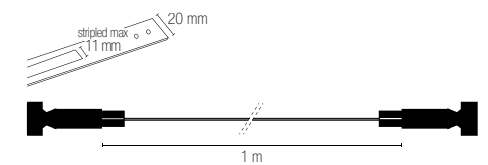


**I-SEGMENTO-BASE**  
8031414894307

Base per piantana SEGMENTO / Base for SEGMENTO floor lamp



**I-SEGMENTO-FIX**  
8031414882465

Set di 2 basette ed accessori / Set of 2 bases and accessories




**I-SEGMENTO-TOOL**  
8031414882472


Kit arnese / Tool kit

# METRO

Sistema cavi tesi con finitura cromo.  
Wire system chrome system.

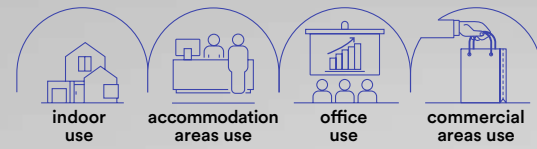

technical information **METRO**

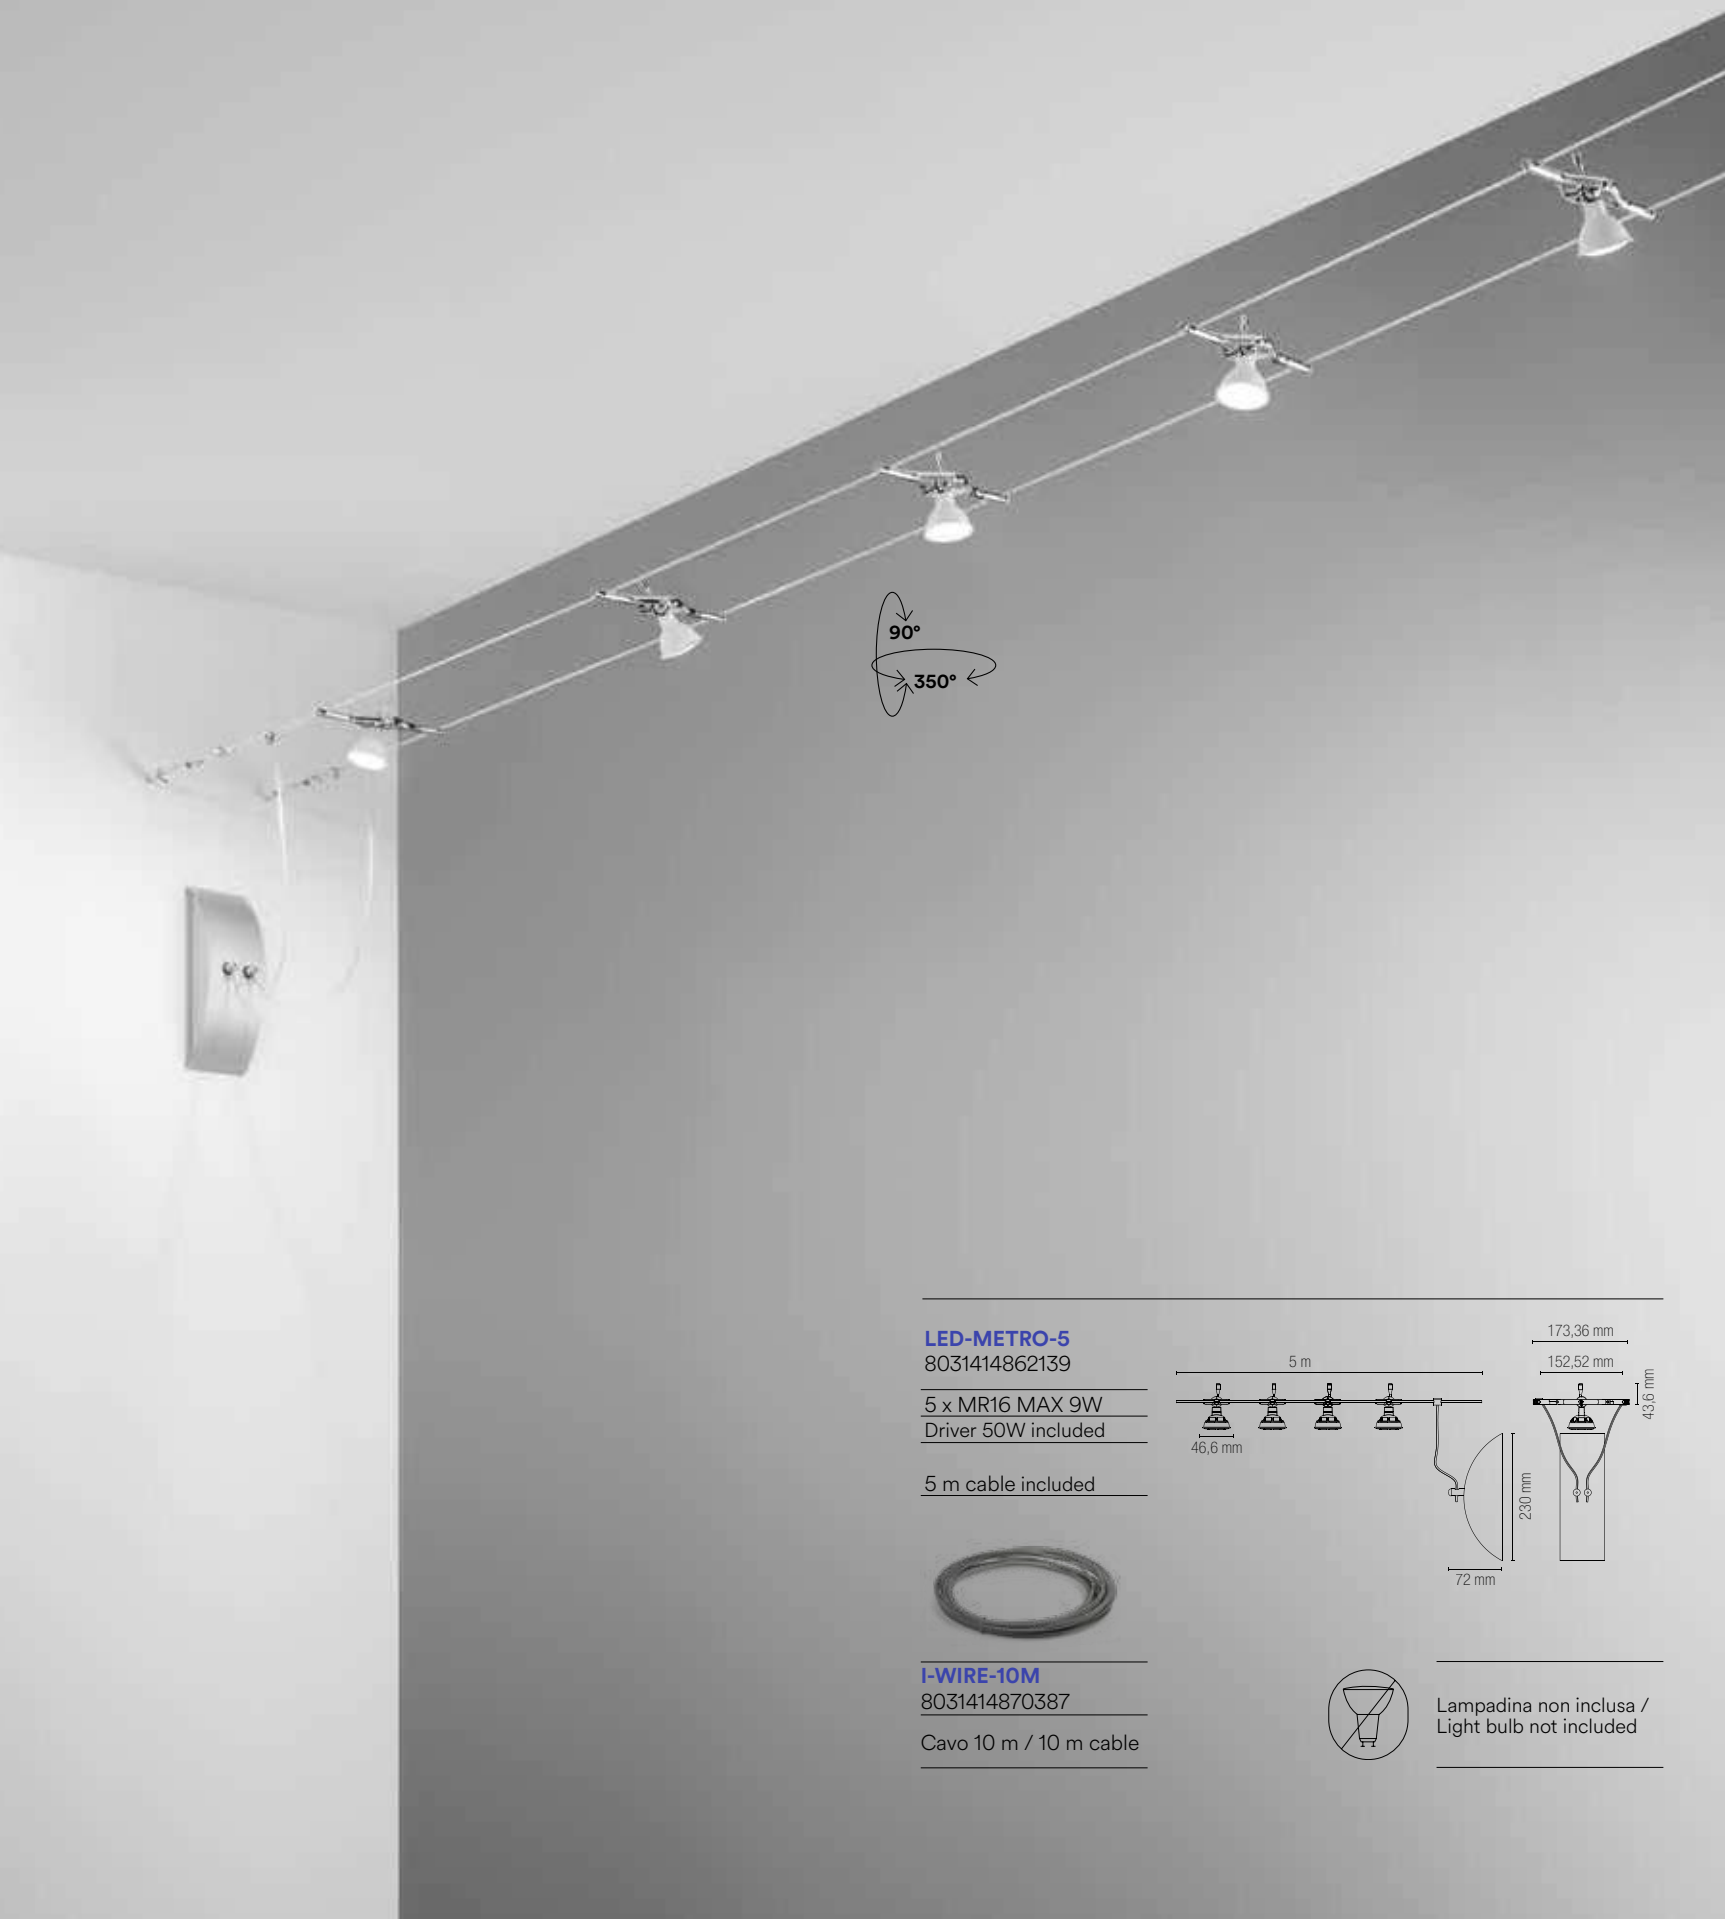

**LED-METRO-5**  
8031414862139


5 x MR16 MAX 9W  
Driver 50W included

5 m cable included



**I-WIRE-10M**  
8031414870387

Cavo 10 m / 10 m cable

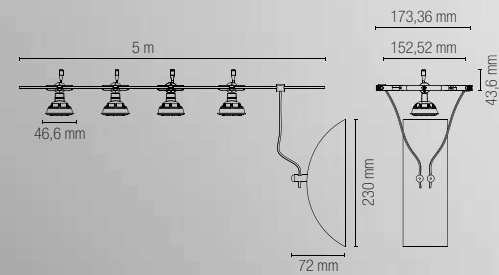


Lampadina non inclusa /  
Light bulb not included



# PANEL PRO

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.

LED panel with aluminum structure and white acrylic diffuser.

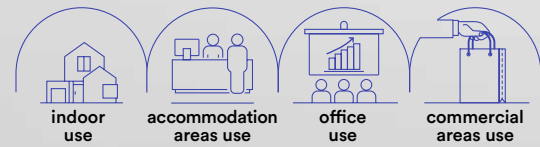

technical information **PANEL PRO**



**Materiale**  
alluminio,  
diffusore in PMMA

**Colore**  
bianco

**Temperatura colore**  
3000K / 4000K / 6500K



**Driver**  
incluso

**Material**  
aluminum,  
PMMA diffuser

**Colour**  
white

**Colour temperature**  
3000K / 4000K / 6500K



**Driver**  
included



**LED-PANEL-60X60-PRO**

8031414904822

lumen

colour temp. | colour



4600 lm

watt

40W

beam angle


120°

pf

0.90

590 x 590 mm

**Fotometria del prodotto / Photometric curve**



LED-PANEL-60X60-PRO



**LED-PANEL-30X120-PRO**

8031414904839

lumen

colour temp. | colour



4600 lm

watt

40W


beam angle

120°

pf

0.90

290 x 1190 mm




LED-PANEL-30X120-PRO

**Accessorio incluso / Included accessory**




Cavo di sicurezza per Panel Backlight 1,5 m / Safety cable for Panel Backlight 1,5 m

**LOOP-IN & LOOP-OUT linkable connection**

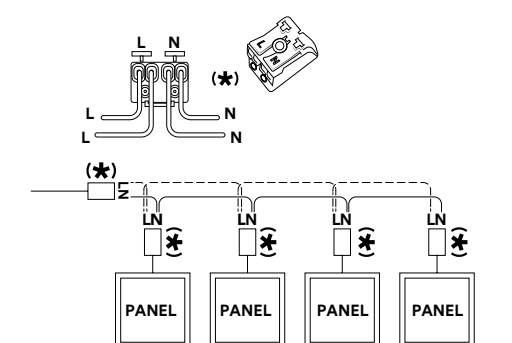

# PANEL BK CCT

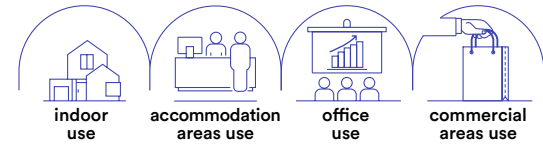

**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco

**Temperatura colore**  
3000K / 4000K / 6500K



**Driver**  
incluso

**Material**  
aluminum,  
acrylic diffuser


**Colour**  
white

**Colour temperature**  
3000K / 4000K / 6500K






**Driver**  
included

**Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.**  
LED panel with aluminum structure and white acrylic diffuser.



<b>LED-PANEL-60X120BK-CCT</b> 8031414918201	colour temp.	colour
lumen	6000 lm	
watt	60W	
beam angle	120°	
pf	0.90	
	590 × 1190 mm	


**Fotometria del prodotto / Photometric curve**

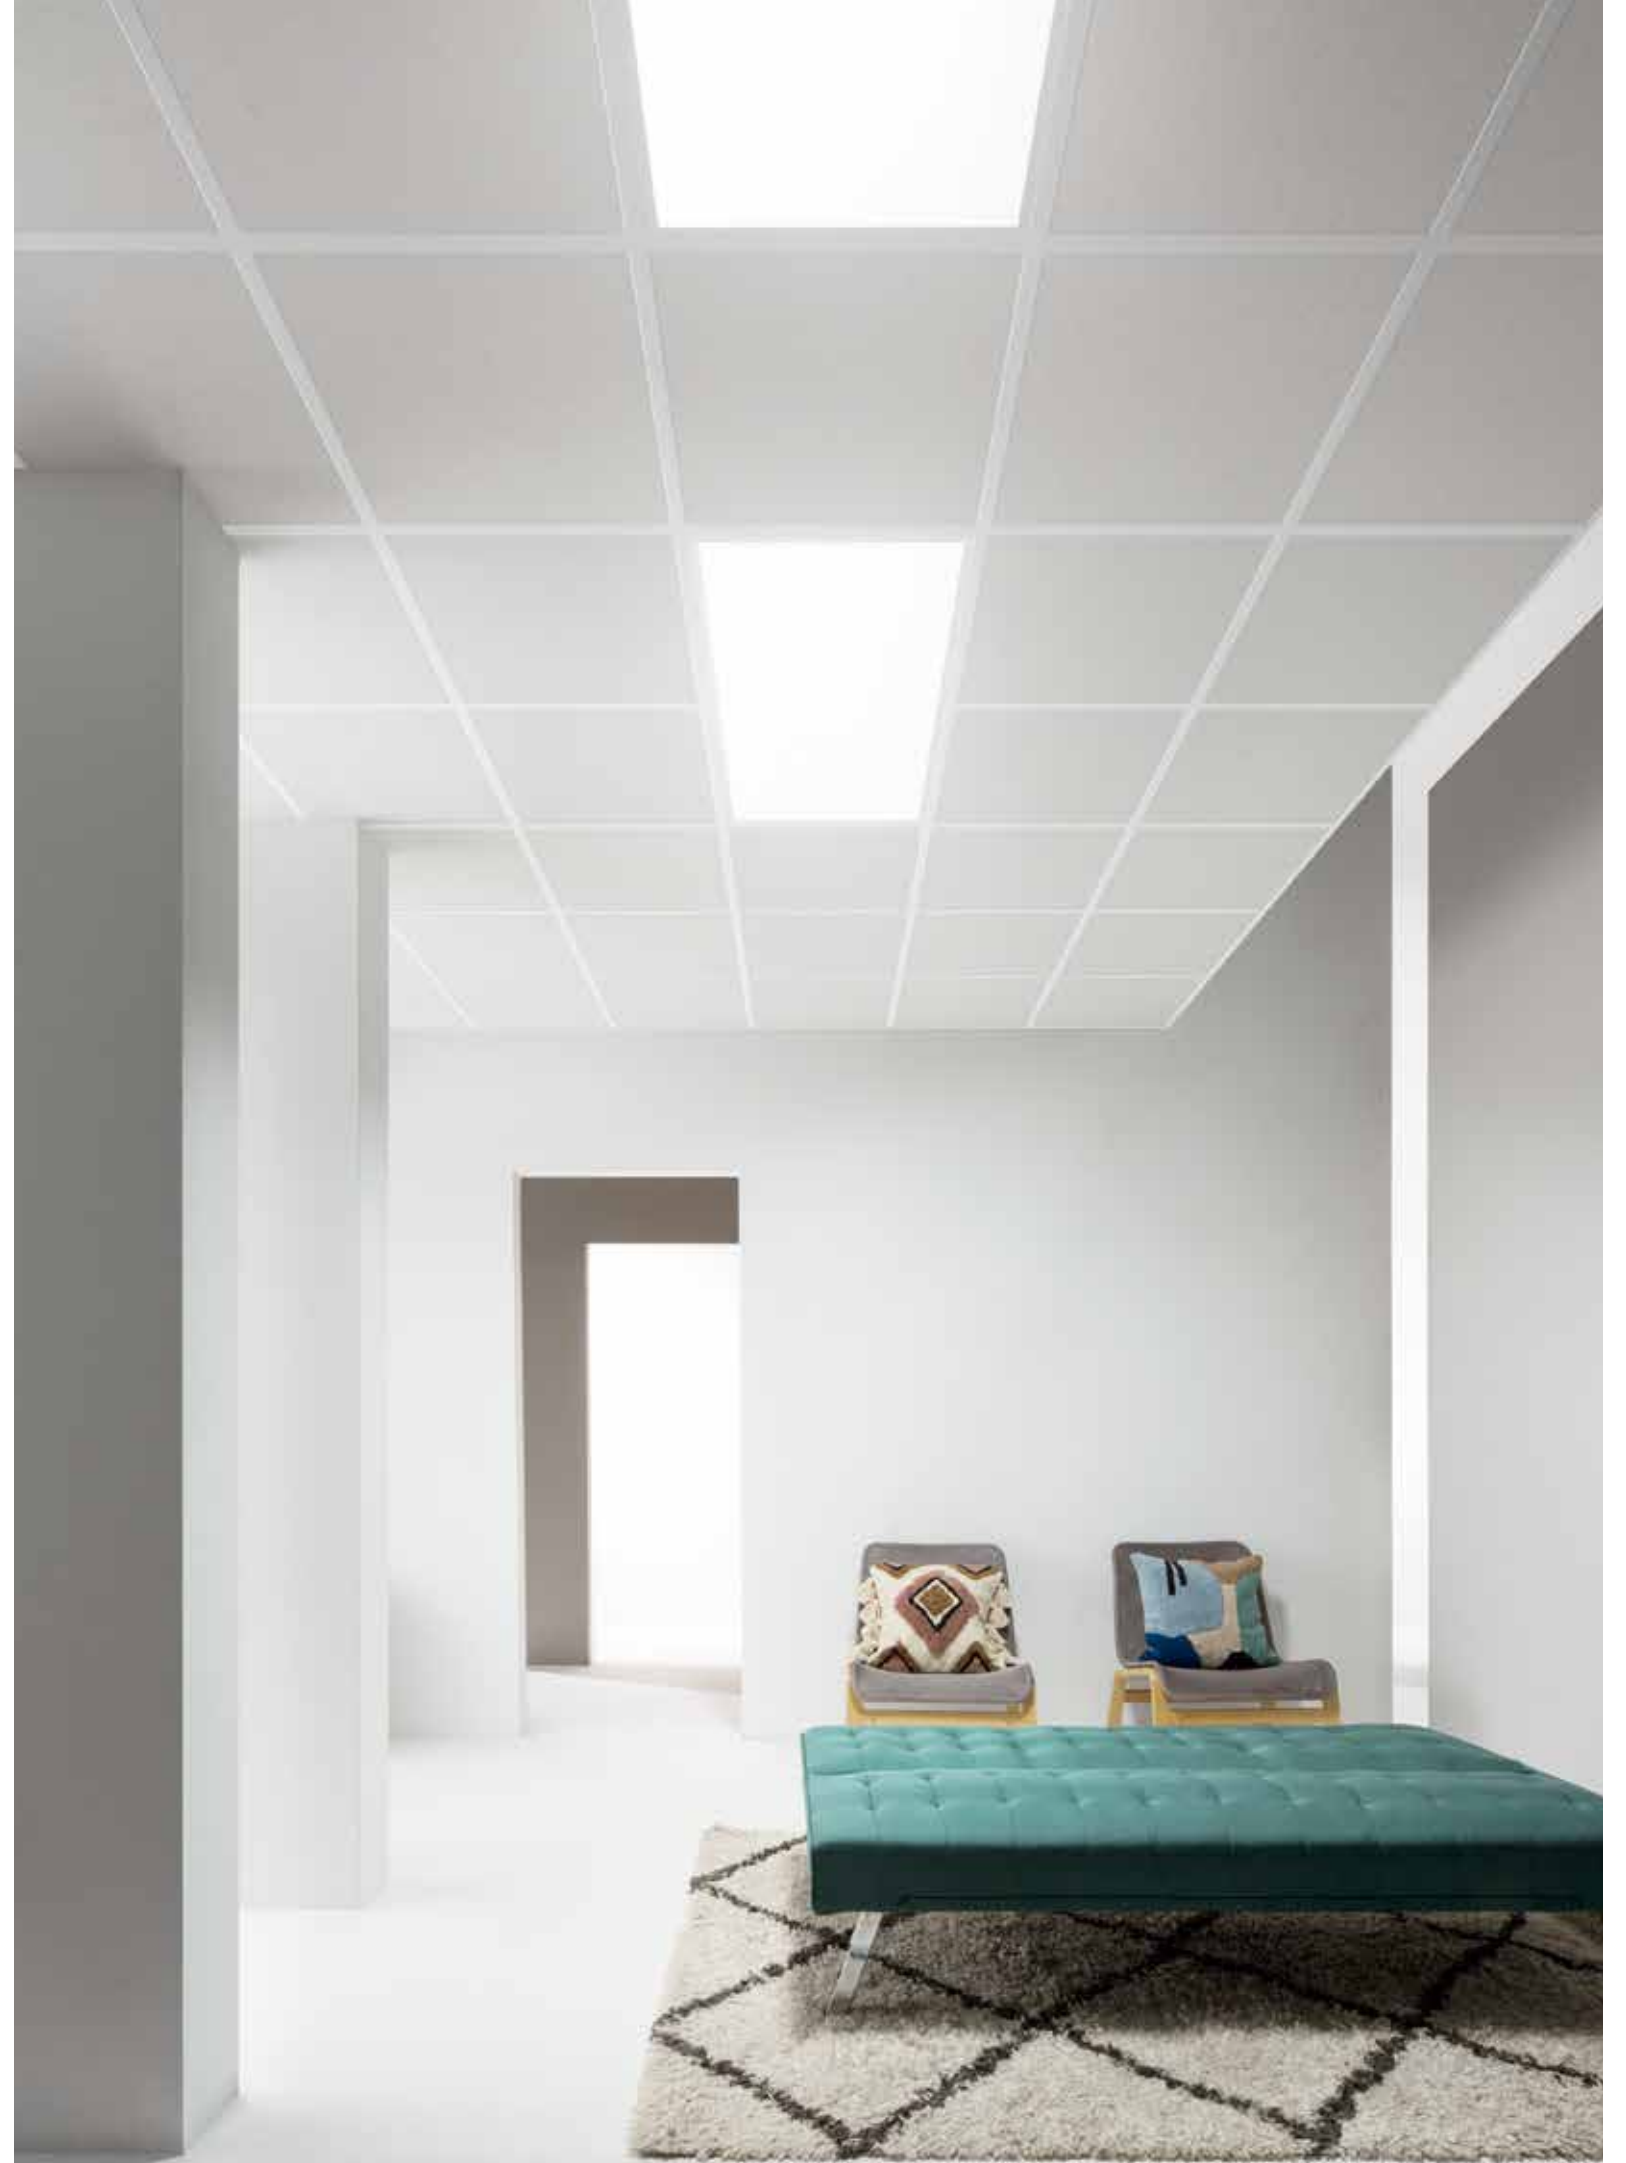

# PANEL BK

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.

LED panel with aluminum structure and white acrylic diffuser.

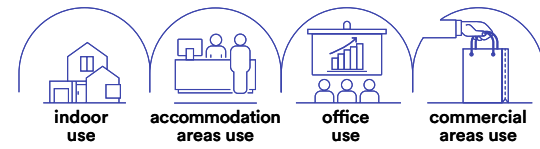

technical information **PANEL BK**



**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco

**Temperatura colore**  
3000K / 4000K / 6000K



**Driver**  
incluso

**Material**  
aluminum,  
acrylic diffuser

**Colour**  
white


**Colour temperature**  
3000K / 4000K / 6000K




**Driver**  
included




	colour temp.	colour
<b>LED-PANEL-C-60X60BK</b> 8031414885046 lumen	3000K	white
<b>LED-PANEL-60X60BK</b> 8031414874323 lumen	4000K	white
<b>LED-PANEL-F-60X60BK</b> 8031414874347 lumen	6000K	white
watt	40W	
beam angle	120°	
pf	0.90	
	590 × 590 mm	




	colour temp.	colour
<b>LED-PANEL-C-30X120BK</b> 8031414916177 lumen	3000K	white
<b>LED-PANEL-30X120BK</b> 8031414874316 lumen	4000K	white
<b>LED-PANEL-F-30X120BK</b> 8031414874330 lumen	6000K	white
watt	40W	
beam angle	120°	
pf	0.90	
	290 × 1190 mm	



Fotometria del prodotto / Photometric curve





LED-PANEL-60X60 BK



LED-PANEL-30X120 BK

# PANEL RGB PANEL IP65

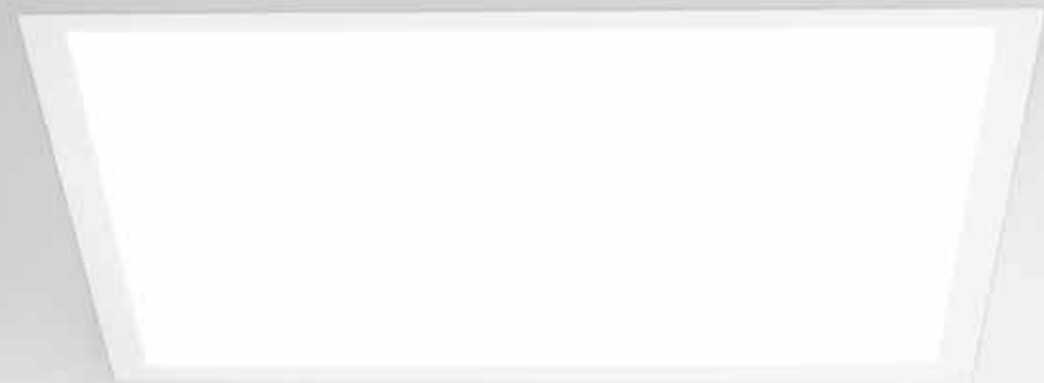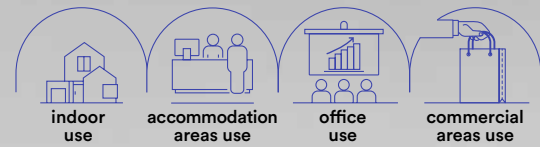

technical information



**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco



**Driver**  
incluso

**Dimmer**  
dimmerabile  
con radiocomando  
incluso

**Material**  
aluminum,  
acrylic diffuser

**Colour**  
white



**Driver**  
included

**Dimmer**  
dimmable with radio  
frequency remote control  
included


## PANEL RGB

**Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione colorazione luce RGB e luce bianca, con radiocomando incluso.**  
LED panel with aluminum structure, acrylic diffuser and white finish.  
RGB and natural white light adjustable with radio frequency remote control included.



<b>LED-PANEL-60x60-RGBW</b> 8031414861064	colour temp. RGB + 4000K	colour white
lumen	4150 lm	


watt	40W
beam angle	120°
pf	0.90
	590 x 590 mm



**Accessorio incluso /  
Included accessory**

Telecomando incluso /  
Remote control included

**Fotometria del prodotto /  
Photometric curve**



LED-PANEL-60x60-RGBW

**Materiale**  
alluminio,  
diffusore in PMMA

**Colore**  
bianco



**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
aluminum,  
PMMA diffuser

**Colour**  
white



**Colour temperature**  
4000K



**Driver**  
included


## PANEL IP65

**Pannello LED UGR<19 e IP65.**  
LED panel UGR<19 and IP65.




<b>LED-PANEL-60X60-IP65</b> 8031414876303	colour temp. 4000K	colour white
lumen	3240 Lm	

watt	36W
beam angle	120°
pf	0.90
	590 x 590 mm




**Fotometria del prodotto /  
Photometric curve**





LED-PANEL-60X60 IP65 UGR

# PANEL FR / EDG

Pannello LED a cornice luminosa.  
LED panel with light frame.

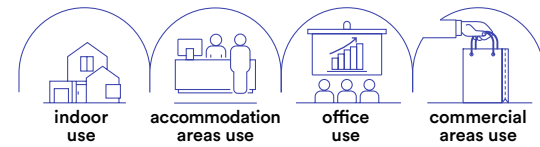


- Materiale**  
alluminio,  
diffusore in PMMA
- Colore**  
bianco
- Temperatura colore**  
CCT
- Driver**  
incluso
- Material**  
aluminum,  
PMMA diffuser
- Colour**  
white
- Colour temperature**  
CCT
- Driver**  
included

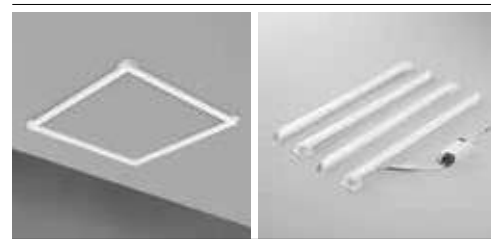



**LED-PANEL-60X60-FR**  
8031414897643

lumen




watt	40W
beam angle	120°
pf	0.90
□	590 × 590 mm

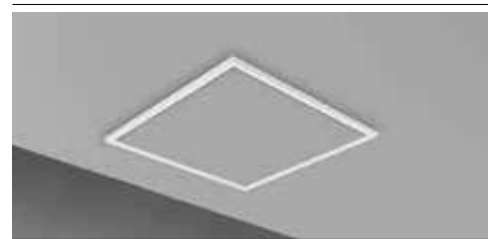


**LED-PANEL-60X60-EDG**  
8031414897650



lumen



watt	42W
beam angle	120°
pf	0.90
□	590 × 590 mm




Fotometria del prodotto /  
Photometric curve



# PANEL SM

Pannello a LED, fissaggio easy a soffitto.  
LED panel, easy ceiling fixing.

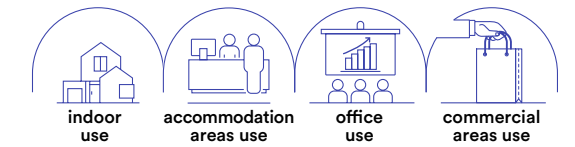


- Materiale**  
alluminio,  
diffusore in PMMA
- Colore**  
bianco
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
aluminum,  
PMMA diffuser
- Colour**  
white
- Colour temperature**  
4000K
- Driver**  
included





**LED-PANEL-60X60-SM**  
8031414897599

lumen




watt	24W
beam angle	120°
pf	0.90
□	590 × 590 mm

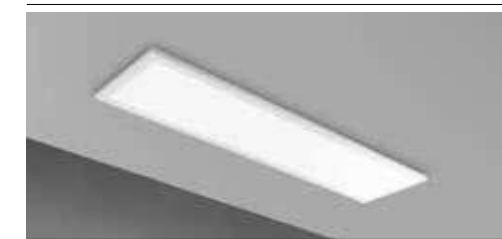


**LED-PANEL-30X120-SM**  
8031414897605



lumen



watt	24W
beam angle	120°
pf	0.90
□	290 × 1190 mm



Fotometria del prodotto /  
Photometric curve





# PANEL BIS

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.  
LED panel with aluminum structure, acrylic diffuser and white finish.

**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
incluso

**Material**  
aluminum,  
acrylic diffuser

**Colour**  
white

**Colour temperature**  
4000K


**Driver**  
included




technical information **PANEL BIS**




<b>LED-PANEL-60X60-BIS</b> 8031414865383	colour temp.	colour
lumen	5400 lm (↓ 2800 lm + 2800 lm ↑)	
watt		40W
beam angle		↓ 120° + 120° ↑
pf		0.90




<b>LED-PANEL-30X120-BIS</b> 8031414865376	colour temp.	colour
lumen	5600 lm (↓ 2700 lm + 2700 lm ↑)	
watt		40W
beam angle		↓ 120° + 120° ↑
pf		0.90



**Fotometria del prodotto /  
Photometric curve**




LED-PANEL-60X60-BIS



LED-PANEL-30X120-BIS




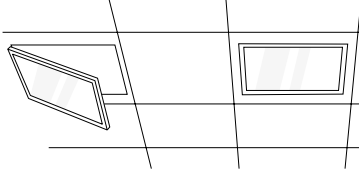






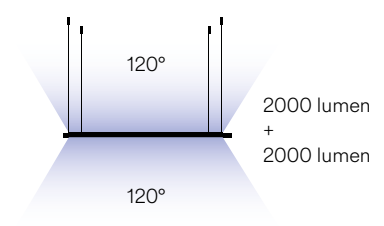


**Accessorio incluso /  
Included accessory**

Kit cavi acciaio ed elettrico 1,5 m /  
steel hanging cable and electric cable 1,5 m



# PANEL

## Accessori Accessories

	<b>LED-PANEL-KIT</b> 8031440352451 Kit 6 cavi 150 cm in acciaio per sospensione. Steel cable kit 150 cm for suspension.	
	<b>LED-PANEL-GANCI</b> 8031440361903 Kit molle 4pz. Metal spring kit 4pcs.	
	<b>LED-PANEL-STAFFE</b> 8031414866175 Kit 6 staffe in acciaio per pannello LED. Steel fixing bars for LED panel.	
	<b>LED-PANEL-BASE</b> 8031414866236 Base a soffitto per driver pannello LED misura: 160 x 110 x 35 mm Metal canopy base for LED panel size: 160 x 110 x 35 mm	
	<b>LED-PANEL-SOSP</b> 8031440361781 Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto misura: 120 x 120 x 60 mm Kit for suspension with 1,5 m cable + metal canopy with electric connection size: 120 x 120 x 60 mm	
	<b>LED-PANEL-DR</b> 8031414889082 PANEL-DR Output 45W 1000mA 45VDC Input 230VAC misura: 141 x 38 x 28 mm PANEL-DR Output 45W 1000mA 45VDC Input 230VAC size: 141 x 38 x 28 mm	
	<b>LED-PANEL-DR-SLIM</b> 8031414888412 PANEL-DR-SLIM Output 45W 1050mA 27-42V Input 220-240VAC misura: 265 x 23 x 20,5 mm PANEL-DR-SLIM Output 45W 1050mA 27-42V Input 220-240VAC size: 265 x 23 x 20,5 mm	
	<b>LED-PANEL-DR-SLIM-DIM</b> 8031414888429 PANEL-DR-SLIM-DIM Output 45W 1050mA 27-42V Input 220-240VAC 0-10V DIMM misura: 265 x 23 x 22,3 mm PANEL-DR-SLIM-DIM Output 45W 1050mA 27-42V Input 220-240VAC 0-10V DIMM size: 265 x 23 x 22,3 mm	
	<b>LED-PANEL-SAFETY</b> 8031414904860 Cavo di sicurezza per Panel Backlight 1,5 m / Safety cable for Panel Backlight 1,5 m	



## Strutture in alluminio per montaggio a plafoniera per pannello LED. Aluminum structures for panel light surface mount.



		colour	Misure dimensioni mm / Size mm
	<b>LED-PANEL-60X60-MT</b> 8031414866212 Struttura per pannello LED, finitura bianco gofrato Aluminum frame for LED panel, embossed white	●	 45 mm 598 mm
	<b>LED-PANEL-60X60-MT GR</b> 8031414871452 Struttura per pannello LED, finitura grigio gofrato Aluminum frame for LED panel, embossed grey	●	
	<b>LED-PANEL-60X60-MT NER</b> 8031414871469 Struttura per pannello LED, finitura nero gofrato Aluminum frame for LED panel, embossed black	●	
	<b>LED-PANEL-60X120-MT</b> 8031414869176 Struttura per pannello LED, finitura bianco gofrato Aluminum frame for LED panel, embossed white	●	 45 mm 598 mm 1198 mm
	<b>LED-PANEL-30X120-MT</b> 8031414866199 Struttura per pannello LED, finitura bianco gofrato Aluminum frame for LED panel, embossed white	●	 45 mm 238 mm 1198 mm
	<b>LED-PANEL-30X120-MT GR</b> 8031414871506 Struttura per pannello LED, finitura grigio gofrato Aluminum frame for LED panel, embossed grey	●	
	<b>LED-PANEL-30X120-MT NER</b> 8031414871476 Struttura per pannello LED, finitura nero gofrato Aluminum frame for LED panel, embossed black	●	

# PANEL-DJ

Pannello a LED con struttura in alluminio e diffusore in acrilico. Sistema di variazione gradi Kelvin e di intensità regolabili con radiocomando incluso e speaker bluetooth.  
LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable Kelvin and luminous flux with radio frequency remote control included and speaker bluetooth.

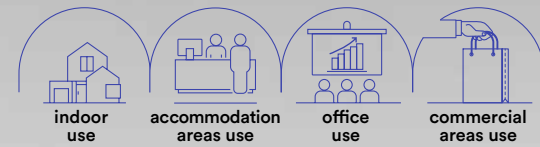

technical information **PANEL-DJ**



	colour temp.	colour
<b>LED-PANEL-60X60-DJ</b> 8031414876242		
lumen	CCT 1840 lm	
watt		42W
beam angle		120°



**SPEAKER**  
2x5W connessione bluetooth 4.2 max 10 m /  
2x5W bluetooth 4.2 connection max 10 m



	colour temp.	colour
<b>LED-PANEL-30X60-DJ</b> 8031414876259		
lumen	CCT 3360 lm	
watt		23W
beam angle		120°



**SPEAKER**  
2x5W connessione bluetooth 4.2 max 10 m /  
2x5W bluetooth 4.2 connection max 10 m

**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco

**Temperatura colore**  
CCT



**Driver**  
incluso

**Dimmer**  
dimmerabile  
con radiocomando  
incluso

**Material**  
aluminum,  
acrylic diffuser

**Colour**  
white


**Colour temperature**  
CCT



**Driver**  
included

**Dimmer**  
dimmable with radio  
frequency remote control  
included

Fotometria del prodotto / Photometric curve

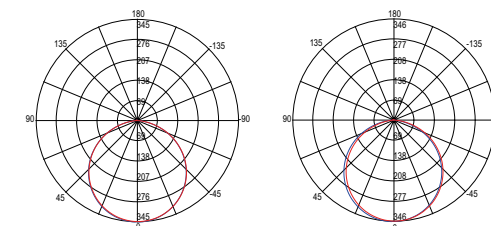

LED-PANEL-60X60-DJ      LED-PANEL-30X60-DJ


Accessorio incluso / Included accessory



**Radiocomando / Remote control**

Dimmerabile con radiocomando /  
Dimmable with radio frequency remote control


# INDOOR

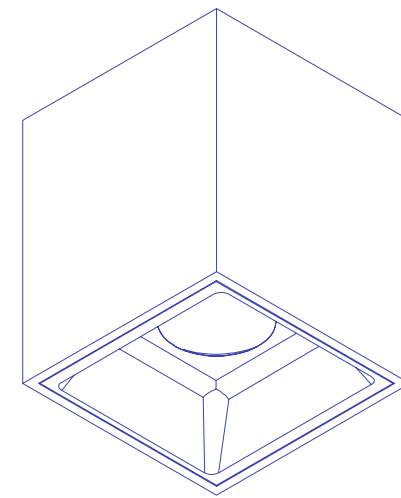

APPLIQUE E PLAFONIERE  
WALL LAMPS AND CEILING LAMPS

# KLIO CCT

Plafoniera a LED con struttura in alluminio pressofuso e diffusore in acrilico.  
LED ceiling lamp with die-cast aluminum structure and acrylic diffuser.

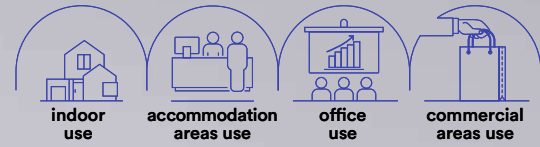

**Materiale**  
alluminio,  
diffusore in acrilico

**Material**  
aluminum,  
acrylic diffuser

**Colore**  
bianco gofrato

**Colour**  
embossed white

**Temperatura colore**  
3000K / 4000K

**Colour temperature**  
3000K / 4000K




**Driver**  
incluso


**Driver**  
included





## Fotometria del prodotto / Photometric curve

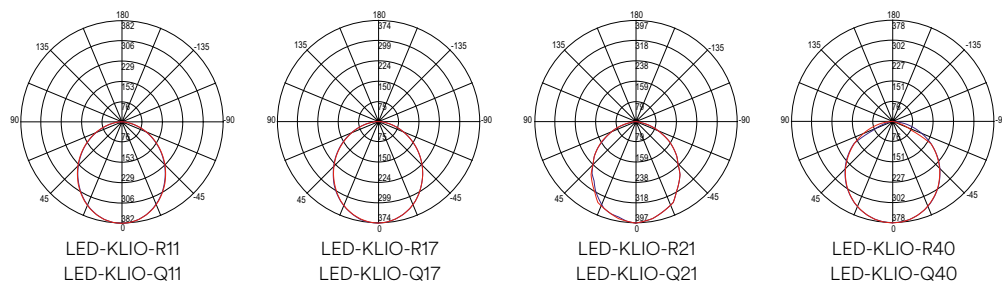


technical information **KLIO CCT**

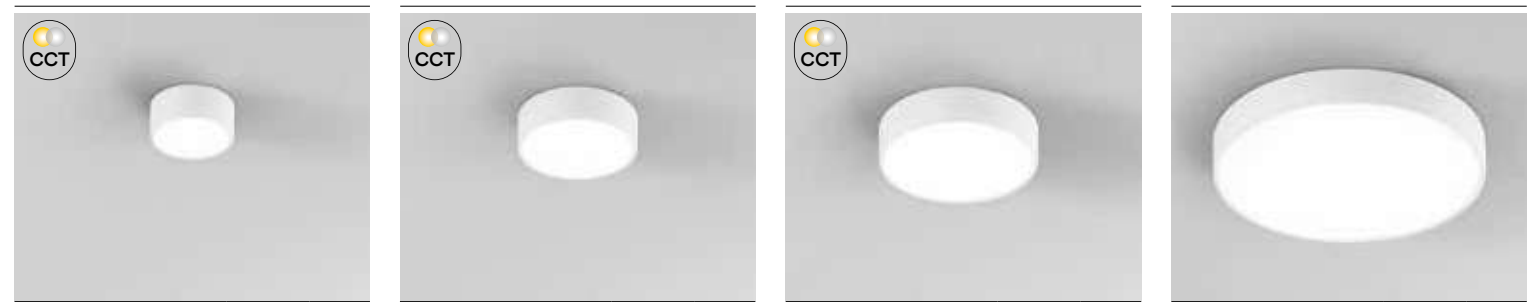

ModelSKU	colour temp.	colour	lumen	watt	beam angle	pf
<b>LED-KLIO-R11</b> 8031440358675	3000K / 4000K	2000 lm	2000 lm	16W	120°	-
<b>LED-KLIO-R17</b> 8031440363587	3000K / 4000K	3000 lm	3000 lm	22W	120°	-
<b>LED-KLIO-R21</b> 8031440363594	3000K / 4000K	4600 lm	4600 lm	36W	120°	0.90
<b>LED-KLIO-R40C</b> 8031414875740	3000K / 4000K	7800 lm	7800 lm	64,8W	120°	0.90
<b>LED-KLIO-R40</b> 8031414868087	3000K / 4000K	7800 lm	7800 lm	64,8W	120°	0.90

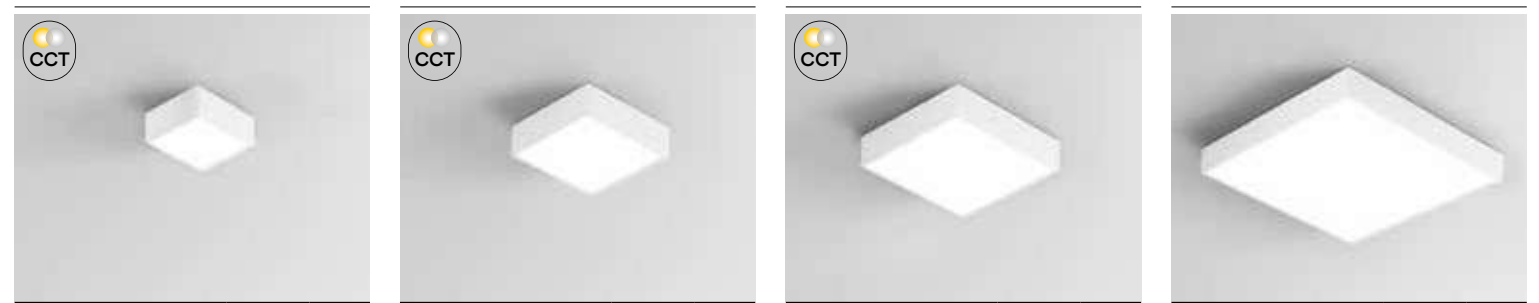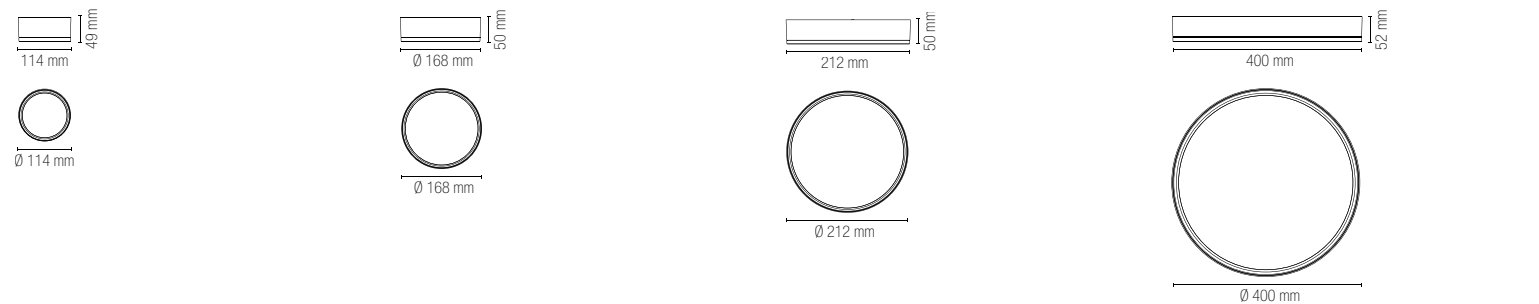



ModelSKU	colour temp.	colour	lumen	watt	beam angle	pf
<b>LED-KLIO-Q11</b> 8031440363563	3000K / 4000K	2000 lm	2000 lm	16W	120°	-
<b>LED-KLIO-Q17</b> 8031440363570	3000K / 4000K	3000 lm	3000 lm	22W	120°	-
<b>LED-KLIO-Q21</b> 8031440363549	3000K / 4000K	4600 lm	4600 lm	36W	120°	0.90
<b>LED-KLIO-Q40C</b> 8031414875702	3000K / 4000K	7800 lm	7800 lm	64,8W	120°	0.90
<b>LED-KLIO-Q40</b> 8031414868070	3000K / 4000K	7800 lm	7800 lm	64,8W	120°	0.90

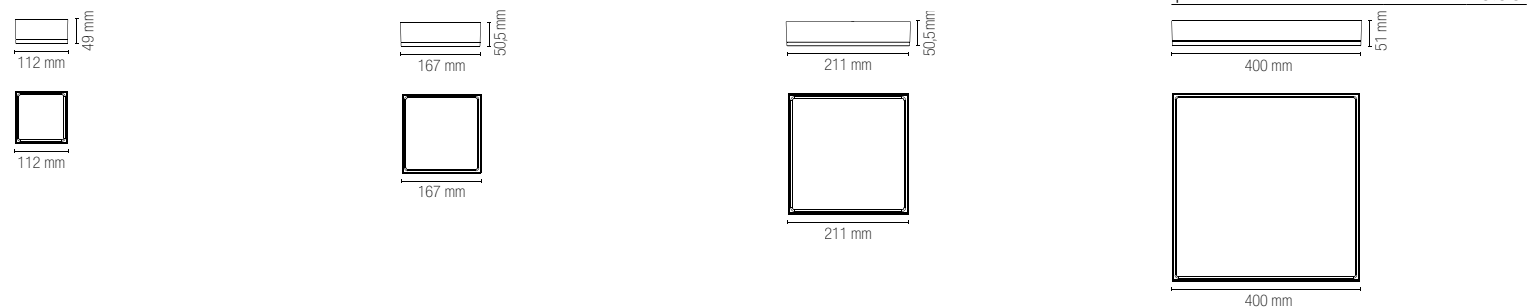

# MIG

## Plafoniera a LED anti-abbagliamento con struttura in alluminio.

Anti-glare LED ceiling lamp with aluminum structure.

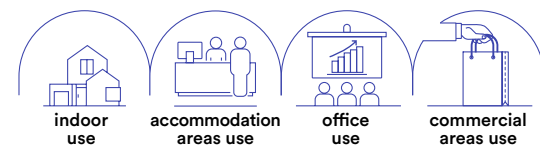

technical information **MIG**



**Materiale**  
struttura in alluminio  
riflettore in acrilico

**Colore**  
bianco gofrato con  
riflettore bianco lucido,  
nero gofrato con  
riflettore nero lucido



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Durata e on/off**  
50.000 h >25.000 on/off

**Material**  
aluminum structure  
with acrylic reflector

**Colour**  
embossed white with  
glossy white reflector,  
embossed black with  
glossy black reflector



**Selectable color temperature**  
3000K / 4000K




**Driver**  
included

**Lifetime and on/off**  
50.000 h >25.000 on/off



**LED-MIG-R-BCO**  
8031414924288  
lumen 2800 lm

colour temp.	colour




watt 20W  
beam angle 45°  
pf 0.90




**LED-MIG-Q-BCO**  
8031414924264  
lumen 2800 lm

colour temp.	colour




watt 20W  
beam angle 45°  
pf 0.90

Fotometria del prodotto / Photometric curve

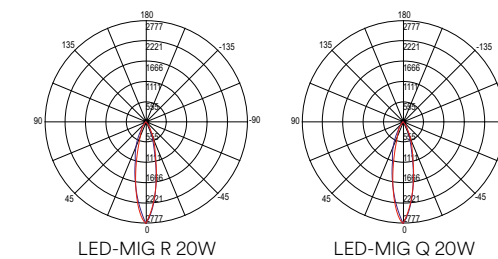

# GENESIS

Plafoniera orientabile con struttura in alluminio bianco o nero opaco.  
Adjustable ceiling lamp with aluminum structure in matt white and black.

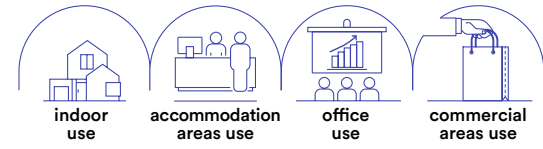

technical information **GENESIS**



**I-GENESIS-R6-BCO**  
8031414883202





1 x GU10 MAX 35W

**I-GENESIS-R6-NER**  
8031414883219




1 x GU10 MAX 35W



Lampadina non inclusa /  
Light bulb not included

# TOWN


Plafoniera con struttura in alluminio bianco o nero opaco.  
Ceiling lamp with aluminum structure in matt white and black.

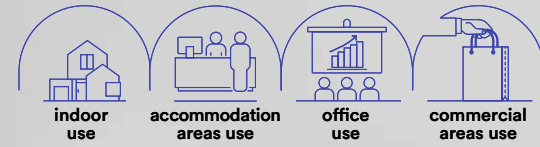


technical information **TOWN**




**I-TOWN-R BCO**  
8031414868179  
**I-TOWN-R NER**  
8031414868162




1 x GU10 MAX 35W




**I-TOWN-Q BCO**  
8031414868155  
**I-TOWN-Q NER**  
8031414868148




1 x GU10 MAX 35W




**I-TOWN-R2 BCO**  
8031414883189  
**I-TOWN-R2 NER**  
8031414883196




2 x GU10 MAX 35W



**I-TOWN-Q2 BCO**  
8031414883165  
**I-TOWN-Q2 NER**  
8031414883172




2 x GU10 MAX 35W





# DOMO

Plafoniera in alluminio con diffusore in acrilico.  
Aluminum ceiling lamp with acrylic diffuser.

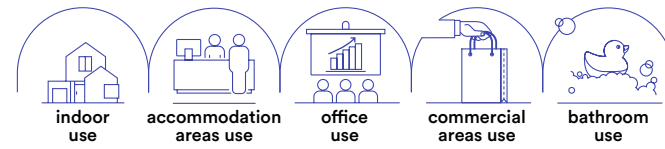

technical information **DOMO**



**Materiale**  
alluminio,  
diffusore in acrilico

**Colore**  
bianco  
nero  
cromo



**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
aluminum,  
acrilic diffuser

**Colour**  
white  
black  
chrome




**Colour temperature**  
4000K




**Driver**  
included



	colour temp.	colour
<b>LED-DOMO-R24-BCO</b> 8031414882779 lumen	2700 lm	● ●
<b>LED-DOMO-R24-NER</b> 8031414893836 lumen	2700 lm	● ●
<b>LED-DOMO-R24</b> 8031414876228 lumen	2700 lm	● ●
watt		24W
beam angle		120°



	colour temp.	colour
<b>LED-DOMO-Q24-BCO</b> 8031414882762 lumen	2700 lm	● ●
<b>LED-DOMO-Q24 NER</b> 8031414893843 lumen	2700 lm	● ●
<b>LED-DOMO-Q24</b> 8031414876235 lumen	2700 lm	● ●
watt		24W
beam angle		120°



# BLASTER

Applique a LED con struttura cromata e diffusore in policarbonato.  
LED wall lamp with chromed structure and polycarbonate diffuser.



# CRUISE

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.  
LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.



Temperatura colore  
4000K



Driver  
integrato

Colour temperature  
4000K



Driver  
built-in driver



**SPOT-B-CRUISE-BCO**

8031414897636

lumen 550 lm

**SPOT-B-CRUISE-NER**

8031414897674

lumen 550 lm


**SPOT-B-CRUISE**

8031440363426

lumen 550 lm

watt 5,2W

beam angle 120°



**Materiale**  
alluminio,  
diffusore in PC

**Colore**  
struttura cromata  
diffusore bianco



Temperatura colore  
4000K



Driver  
integrato

**Material**  
aluminum,  
PC diffuser

**Colour**  
chrome structure  
white diffuser



Colour temperature  
4000K



Driver  
built-in driver



**LED-BLASTER-60**

8031414866526

lumen 1720 lm

watt 15W

beam angle 133°

plug max 2000W

600 mm

53 mm

120 mm

**LED-BLASTER-PLUG**

8031414866519

lumen 1000 lm

watt 8W

beam angle 133°

plug max 2000W


492 mm

66 mm

59 mm

# YACHT

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.  
LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.

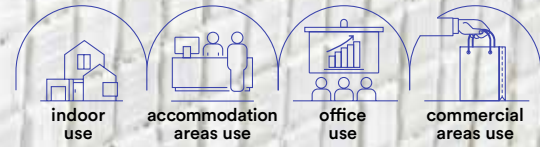

# NOIR

Applique a LED nero con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.  
Black LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.



in-tac-light APPLIQUE PLAFONNIERE / WALL LAMPS AND CEILING LAMPS


**Materiale**  
termoplastica

**Material**  
thermoplastic



**Colore**  
cromo  
diffusore in acrilico

**Colour**  
chrome  
acrylic diffuser




**Temperatura colore**  
3000K / 4000K

**Colour temperature**  
3000K / 4000K



**Driver**  
integrato

**Driver**  
built-in driver

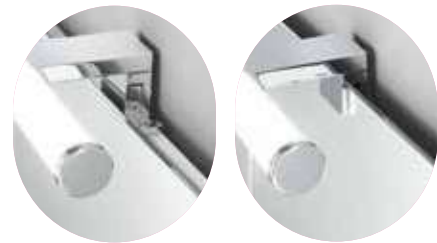


**SPOT-B-YACHT-5C**  
8031414915736  
lumen

colour temp.	colour
600 lm	

**SPOT-B-YACHT-5M**  
8031414915743  
lumen

colour temp.	colour
600 lm	

watt 5W  
beam angle 120°




**Materiale**  
termoplastica

**Material**  
thermoplastic



**Colore**  
nero opaco  
diffusore in acrilico

**Colour**  
satin black  
acrylic diffuser




**Temperatura colore**  
3000K / 4000K

**Colour temperature**  
3000K / 4000K



**Driver**  
integrato

**Driver**  
built-in driver

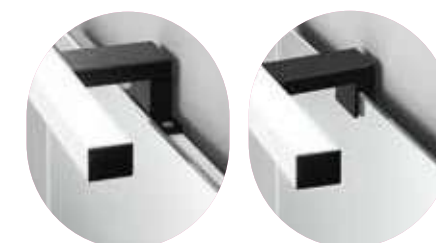


**SPOT-B-NOIR-5C**  
8031414917570  
lumen

colour temp.	colour
600 lm	

**SPOT-B-NOIR-5M**  
8031414917587  
lumen

colour temp.	colour
600 lm	

watt 5W  
beam angle 120°



# LANCER

Applique a LED in alluminio bianco, nero, cromato ed oro spazzolato.  
LED wall light in white, black, chrome and brushed gold aluminum.



technical information **LANCER**



## Materiale

alluminio,  
diffusore in PC

## Colore

bianco goffrato  
nero goffrato  
cromo  
oro spazzolato



## Temperatura colore

3000K / 4000K



## Driver

integrato

## Material

aluminum,  
PC diffuser

## Colour

embossed white  
embossed black  
chrome  
brushed gold



## Colour temperature

3000K / 4000K




## Driver


built-in driver




	colour temp.	colour
<b>LED-W-LANCER-C BCO</b> 8031414876679		
lumen	1000 lm	
<b>LED-W-LANCER BCO</b> 8031440361200		
lumen	1000 lm	
watt	13W	
beam angle	120°	




	colour temp.	colour
<b>LED-W-LANCER NERO</b> 8031440361217		
lumen	1000 lm	
watt	13W	
beam angle	120°	



	colour temp.	colour
<b>LED-W-LANCER CR</b> 8031414882564		
lumen	1000 lm	
watt	13W	
beam angle	120°	




	colour temp.	colour
<b>LED-W-LANCER ORO</b> 8031414882571		
lumen	1000 lm	
watt	13W	
beam angle	120°	



# SACS

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.

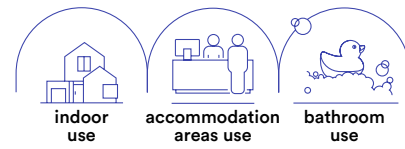

Temperatura colore  
4000K




Driver  
integrato

Colour temperature  
4000K



Driver  
built-in driver



**SPOT-B-SACS-XL**

8031414877010

lumen

colour temp.



540 lm

colour



watt

4W

beam angle

120°



# RIVA

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.



Temperatura colore  
4000K



Driver  
integrato

Colour temperature  
4000K



Driver  
built-in driver



**SPOT-B-RIVA**

8031440363457

lumen

colour temp.



575 lm

colour




watt

8W

beam angle

120°



Fissaggio su cornice /  
Frame fixing



Fissaggio su specchio /  
Mirror fixing



# AQA

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.  
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.




# WALLY

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.  
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.




**Materiale**  
alluminio,  
diffusore in PC

**Material**  
aluminum,  
PC diffuser





**Colore**  
struttura cromata  
diffusore bianco

**Colour**  
chrome structure  
white diffuser

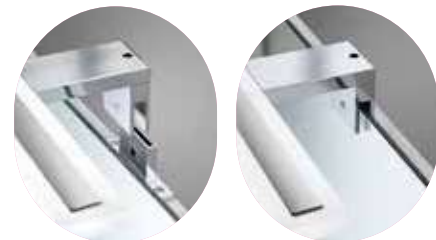

<b>SPOT-B-AQA</b> 8031414877027		colour temp.	colour
lumen		819 lm	
watt	8W		
beam angle	120°		



**Temperatura colore**  
4000K


**Colour temperature**  
4000K



**Driver**  
integrato

**Driver**  
built-in driver

**Temperatura colore**  
4000K



**Driver**  
integrato


<b>SPOT-B-WALLY</b> 8031440363471		colour temp.	colour
lumen		910 lm	
watt	8W		
beam angle	120°		

**Colour temperature**  
4000K


**watt**  
beam angle

**8W**  
120°

**Driver**  
built-in driver



# DIVA

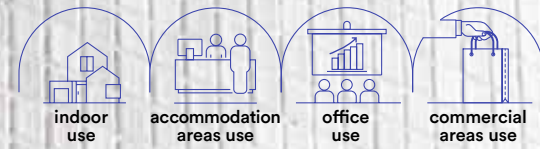

technical information **DIVA**



**Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio. Disponibile in forma circolare con diametro di 75 mm o in forma quadrata di 45 mm.**  
 LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting. Available in circular form with a diameter of 75 mm or in square form with a diameter of 45 mm.



**Materiale**  
termoplastica

**Colore**  
struttura cromata  
diffusore bianco



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
thermoplastic

**Colour**  
chrome structure  
white diffuser




**Colour temperature**  
3000K / 4000K




**Driver**  
built-in driver

	colour temp.	colour
<b>SPOT-B-DIVA-R4C</b> 8031414915750 lumen		
	460 lm	
<b>SPOT-B-DIVA-R4M</b> 8031414915767 lumen		
	460 lm	
watt	4W	
beam angle	100°	



	colour temp.	colour
<b>SPOT-B-DIVA-Q4C</b> 8031414915774 lumen		
	460 lm	
<b>SPOT-B-DIVA-Q4M</b> 8031414915781 lumen		
	460 lm	
watt	4W	
beam angle	100°	



Fissaggio su cornice / Frame fixing


Fissaggio su specchio / Mirror fixing

Fissaggio su cornice / Frame fixing

Fissaggio su specchio / Mirror fixing

# F1

**Applique metallo flessibile cromo con diffusore in vetro bianco satinato.**  
Flexible chrome metal wall lamp with satin white glass diffuser.

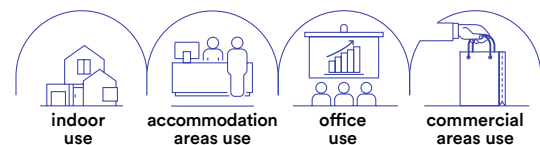


# ROBY

**Applique da specchio in metallo cromato con diffusore in vetro bianco cromato.**  
Mirror wall lamp in chromed metal with white chromed glass diffuser.




# Q1

**Applique metallo cromo con diffusore in vetro satinato.**  
Chrome metal wall lamp with satin glass diffuser.

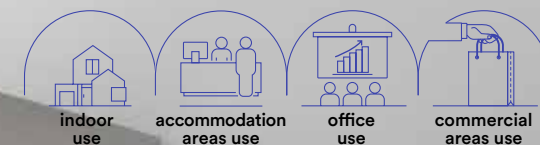



# INDOOR

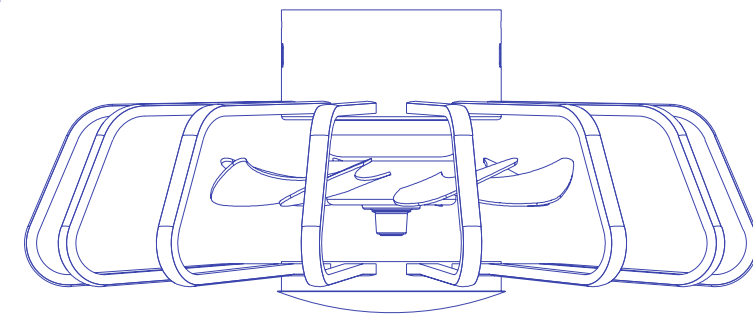


VENTILATORI  
FANS

# HERON

Plafoniera con ventilatore bladeless dalla forma circolare e con LED integrato.

Bladeless fan ceiling lamp with a circular shape and integrated LED.

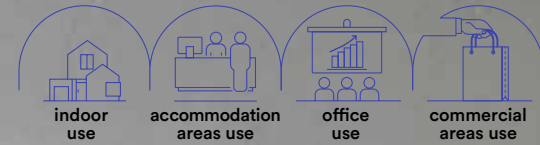

## Materiale

alluminio e acrilico

## Temperatura colore

CCT



## Materiale ventilatore

ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

## Driver

incluso

## Material

aluminum and acrylic

## Colour temperature

CCT




## Fan material

ultra silent bladeless fan with rotating system for greater air diffusion

## Driver

included



technical information **HERON**




**LED-HERON-BCO**  
8031414919796

lumen	5280 lm
led	48W 220-240V - 50/60Hz ⚡
fan	20W 220-240V - 50/60Hz ⌚
beam angle	120°
potenza ventilatore / fan power	DC20W 6 velocità / speed
volume aria / air volume	25 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

colour temp. | colour




CCT  
5280 lm



VENTILATORI / FANS  
In.tec light

### Control system easy installation



Regolazione velocità ventole /  
Fan speed adjustment



Impostazione timer /  
Timer setting



Regolazione intensità di luce (dimmer) /  
Light intensity (dimmer)




Regolazione gradi kelvin /  
Adjustable white

# BLYTH

Plafoniera con ventilatore bladeless dalla forma quadrata e con LED integrato.

Bladeless fan ceiling lamp with a square shape and integrated LED.

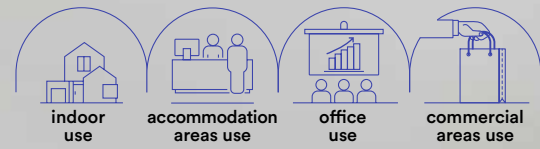

technical information **BLYTH**




**LED-BLYTH-BCO**  
8031414919789

lumen	5280 lm
led	48W 220-240V - 50/60Hz ⚡
fan	20W 220-240V - 50/60Hz ⌚
beam angle	120°
potenza ventilatore / fan power	DC20W 6 velocità / speed
volume aria / air volume	25 m³ min.
livello sonoro / sound level	48 dB

colour temp. | colour






CCT  
5280 lm



VENTILATORI / FANS  
In.tec light

## Control system easy installation



### Materiale

alluminio e acrilico

### Temperatura colore

CCT



### Materiale ventilatore

ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

### Driver

incluso

### Material

aluminum and acrylic

### Colour temperature

CCT



### Fan material

ultra silent bladeless fan with rotating system for greater air diffusion


### Driver

included



# ALBATROS

Plafoniera con ventilatore.  
Ceiling lamp with fan.

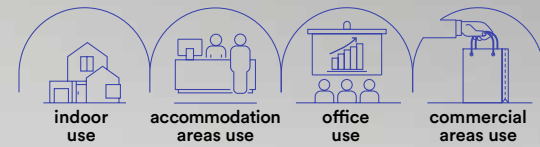

### Materiale

alluminio, acrilico

### Colore

bianco  
nero



### Temperatura colore

CCT



### Materiale ventilatore

3 lame in termoplastica retrattili

### Caratteristiche ventilatore

3 lame ultra silenziose con rotazione bilaterale

### Driver

incluso

### Material

aluminum, acrylic

### Colour

white  
black



### Colour temperature

CCT



### Fan material


3 thermoplastic retractable blades

### Fan characteristics

3 ultra-silent blades

### Driver

included




technical information **ALBATROS**



### LED-ALBATROS-BCO

8031414919765


	colour temp.	colour
lumen	CCT 4668 lm	
led	36W 220-240V - 50/60Hz	
fan	30W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	

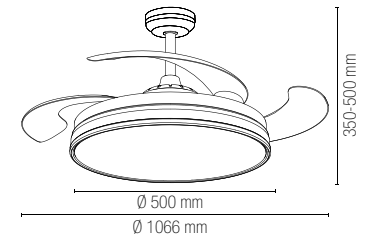


### LED-ALBATROS-NER

8031414919635



	colour temp.	colour
lumen	CCT 4668 lm	
led	36W 220-240V - 50/60Hz	
fan	30W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	

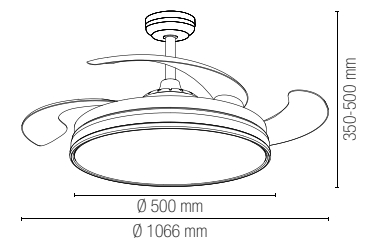

### Reverse system - DC motor




### Control system easy installation



# MAGNUS

Plafoniera con ventilatore.  
Ceiling lamp with fan.

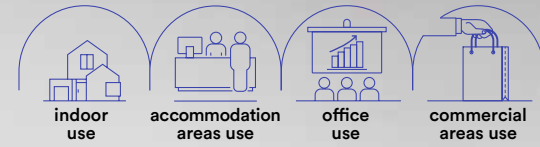

**Materiale**  
alluminio, acrilico

**Colore**  
bianco  
nero



**Temperatura colore**  
CCT



**Materiale ventilatore**  
3 lame  
in termoplastica

**Caratteristiche ventilatore**  
3 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white  
black



**Colour temperature**  
CCT



**Fan material**  
3 thermoplastic  
blades

**Fan characteristics**  
3 ultra-silent  
blades

**Driver**  
included





technical information **MAGNUS**





**LED-MAGNUS-BCO**  
8031414919727

lumen	9400 lm
led	80W 220-240V - 50/60Hz ⚡
fan	32W 220-240V - 50/60Hz ⌚
beam angle	120°
potenza ventilatore / fan power	DC40W 6 velocità / speed
volume aria / air volume	50 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

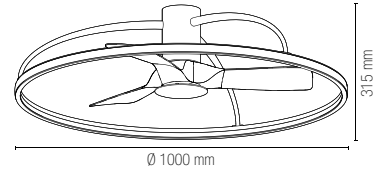


**LED-MAGNUS-NER**  
8031414919734





lumen	9400 lm
led	80W 220-240V - 50/60Hz ⚡
fan	32W 220-240V - 50/60Hz ⌚
beam angle	120°
potenza ventilatore / fan power	DC40W 6 velocità / speed
volume aria / air volume	50 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

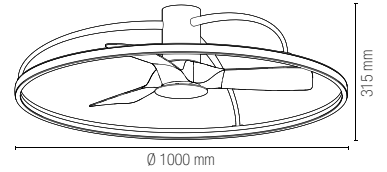

Reverse system - DC motor




Control system easy installation



# HADLEY

Plafoniera con ventilatore.  
Ceiling lamp with fan.

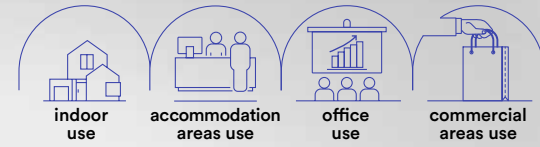

**Materiale**  
alluminio, acrilico

**Colore**  
bianco  
nero  
antracite



**Temperatura colore**  
CCT



**Materiale ventilatore**  
3 lame  
in termoplastica

**Caratteristiche ventilatore**  
3 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white  
black  
anthracite




**Colour temperature**  
CCT



**Fan material**  
3 thermoplastic  
blades

**Fan characteristics**  
3 ultra-silent  
blades

**Driver**  
included




technical information **HADLEY**




**LED-HADLEY-BCO**  
8031414919697

	colour temp.	colour
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




**LED-HADLEY-NER**  
8031414919710

	colour temp.	colour
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	





**LED-HADLEY-GR**  
8031414919703

	colour temp.	colour
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor



Control system easy installation

Regolazione velocità ventole /  
Fan speed adjustment


Impostazione timer /  
Timer setting

Regolazione intensità di luce (dimmer) /  
Light intensity (dimmer)

Regolazione gradi kelvin /  
Adjustable white

# AUSTER


Plafoniera con ventilatore.  
Ceiling lamp with fan.

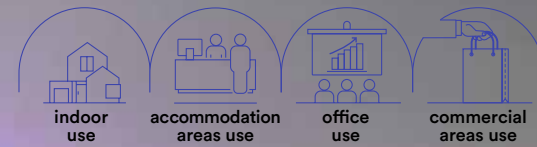


technical information **AUSTER**



**LED-AUSTER-COLOR**  
8031414919758



lumen	7650 lm
led	60W 220-240V - 50/60Hz ⚡
fan	28W 220-240V - 50/60Hz ⌚
beam angle	120°
potenza ventilatore / fan power	DC40W 6 velocità / speed
volume aria / air volume	50 m <sup>3</sup> min.
livello sonoro / sound level	48 dB



**Materiale**  
alluminio, acrilico

**Colore**  
bianco

**Temperatura colore**  
RAINBOW + CCT



**Materiale ventilatore**  
3 lame  
in termoplastica

**Caratteristiche ventilatore**  
3 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white

**Colour temperature**  
RAINBOW + CCT





**Fan material**  
3 thermoplastic  
blades

**Fan characteristics**  
3 ultra-silent  
blades




**Driver**  
included



Reverse system - DC motor




Control system easy installation



# STORM

Plafoniera con ventilatore.  
Ceiling lamp with fan.

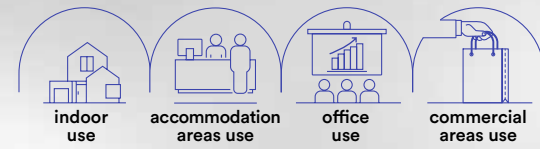

**Materiale**  
alluminio, acrilico

**Colore**  
bianco  
nero



**Temperatura colore**  
CCT



**Materiale ventilatore**  
3 lame  
in termoplastica

**Caratteristiche ventilatore**  
3 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white  
black



**Colour temperature**  
CCT



**Fan material**  
3 thermoplastic  
blades

**Fan characteristics**  
3 ultra-silent  
blades

**Driver**  
included




technical information **STORM**




**LED-STORM-BCO**  
8031414919741

	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	




**LED-STORM-NER**  
8031414919758




	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor



Control system easy installation





Plafoniere con ventilatore in bianco effetto cielo stellato.  
Ceiling fan lamps with white starry sky effect.



technical information




## BOREA



**LED-BOREA-INT**  
8031414873692

	colour temp.	colour
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	




## SKYRON



**LED-SKYRON-INT**  
8031414873678

	colour temp.	colour
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m³ min.	
livello sonoro / sound level	48 dB	



**Materiale**  
acrilico PMMA  
bianco effetto cielo stellato

**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame bianche  
in termoplastica

**Caratteristiche ventilatore**  
7 lame ultra silenziose  
con rotazione unilaterale.  
Ghiera esterna roteante per  
una maggiore diffusione dell'aria.

**Driver**  
incluso

**Material**  
PMMA acrylic white colour  
with starry sky effect

**Colour temperature**  
CCT



**Fan material**  
7 white  
thermoplastic blades

**Fan characteristics**  
7 ultra-silent blades  
unidirectional rotation  
rotating outer ring for  
greater air diffusion

**Driver**  
included

Control system easy installation



On-off ghiera esterna /  
On-off outer ring



Regolazione velocità ventole /  
Fan speed adjustment



Impostazione timer /  
Timer setting



Regolazione intensità di luce (dimmer) /  
Light intensity (dimmer)



Regolazione gradi kelvin /  
Adjustable white



Smart  
Intec  
WIFI



RF 2.4G  
control  
system



ALEXA e  
GOOGLE  
HOME  
voice control



SMART INTEC




SMART LIFE



Powered by  
tuya  
Intelligence  
Inside

Plafoniere con ventilatore in acrilico PMMA.  
Ceiling fan lamps with PMMA acrylic fan.



**Materiale**  
acrilico PMMA

**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame trasparenti  
in termoplastica

**Caratteristiche ventilatore**

7 lame ultra  
silenziose con  
rotazione unilaterale

**Driver**  
incluso

**Material**  
PMMA acrylic

**Colour temperature**  
CCT




**Fan material**  
7 trasparent  
thermoplastic blades

**Fan characteristics**

7 ultra-silent  
blades unidirectional  
rotation

**Driver**  
included

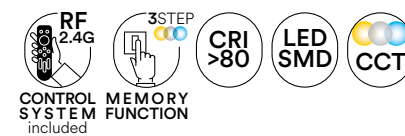

technical information




## ALISEO



**LED-ALISEO-INT**  
8031414873661

	colour temp.	colour
lumen	CCT 4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	




## FOEHN



**LED-FOEHN-INT**  
8031414873685

	colour temp.	colour
lumen	CCT 4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	



Control system easy installation



On-off ghiera esterna /  
On-off outer ring



Regolazione velocità ventole /  
Fan speed adjustment



Impostazione timer /  
Timer setting



Regolazione intensità di luce (dimmer) /  
Light intensity (dimmer)



Regolazione gradi kelvin /  
Adjustable white



Smart  
Intec  
WiFi



RF 2.4G  
control  
system




ALEXA e  
GOOGLE  
HOME  
voice control



# GRECALE

Plafoniera con ventilatore.  
Ceiling lamp with fan.

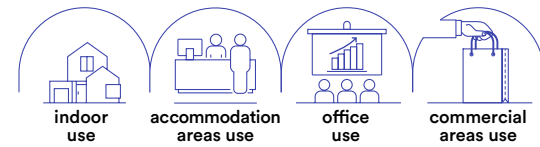

technical information GRECALE



**Materiale**  
alluminio, acrilico

**Colore**  
bianco  
nero



**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame  
in termoplastica

**Caratteristiche ventilatore**  
7 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white  
black



**Colour temperature**  
CCT



**Fan material**  
7 thermoplastic  
blades

**Fan characteristics**  
7 ultra-silent  
blades



**Driver**  
included



**LED-GRECALE-W-INT**  
8031414885947

lumen	8470 lm
led	80W 220-240V - 50/60Hz
fan	22W 220-240V - 50/60Hz
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	25 m <sup>3</sup> min.
livello sonoro / sound level	48 dB


colour temp.	colour
CCT	

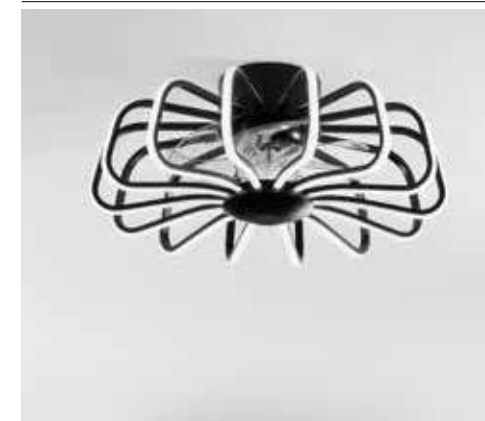


**LED-GRECALE-B-INT**  
8031414885954

lumen	8470 lm
led	80W 220-240V - 50/60Hz
fan	22W 220-240V - 50/60Hz
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	25 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

colour temp.	colour
CCT	



Reverse system - DC motor



Control system easy installation

Regolazione velocità ventole /  
Fan speed adjustment

Impostazione timer /  
Timer setting

Regolazione intensità di luce (dimmer) /  
Light intensity (dimmer)

Regolazione gradi kelvin /  
Adjustable white



Smart  
Intec  
WIFI



RF 2.4G  
control  
system



ALEXA e  
GOOGLE  
HOME  
voice control



Plafoniere con ventilatore in bianco effetto cielo stellato.  
Ceiling fan lamps with white starry sky effect.




technical information



## LEVANTE




	colour temp.	colour
<b>LED-LEVANTE-INT</b> 8031414885930		
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	



## SCIROCCO



	colour temp.	colour
<b>LED-SCIROCCO-INT</b> 8031414885923		
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m <sup>3</sup> min.	
livello sonoro / sound level	48 dB	



**Materiale**  
acrilico PMMA  
bianco effetto cielo stellato

**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame bianche  
in termoplastica

**Caratteristiche ventilatore**  
7 lame ultra silenziose  
con rotazione bilaterale,  
ghiera esterna roteante per  
una maggiore diffusione dell'aria

**Driver**  
incluso

**Material**  
PMMA acrylic white colour  
with starry sky effect

**Colour temperature**  
CCT




**Fan material**  
7 white  
thermoplastic blades

**Fan characteristics**  
7 ultra-silent blades  
bidirectional rotation  
rotating outer ring for  
greater air diffusion


**Driver**  
included

Reverse system - DC motor

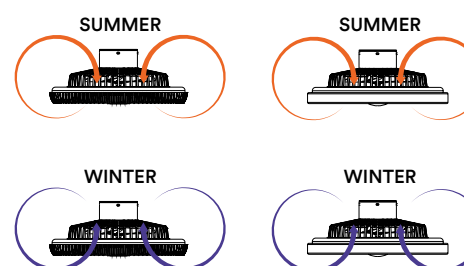


Control system easy installation

- On-off ghiria esterna / On-off outer ring
- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

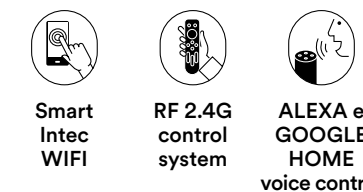

# ETESIA

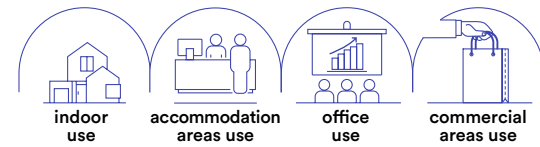

**Materiale**  
alluminio, acrilico

**Colore**  
bianco  
nero



**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame  
in termoplastica

**Caratteristiche ventilatore**  
7 lame ultra silenziose  
con rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour**  
white  
black




**Colour temperature**  
CCT




**Fan material**  
7 thermoplastic  
blades

**Fan characteristics**  
7 ultra-silent  
blades



**Driver**  
incluso

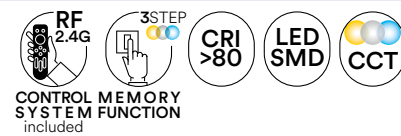

**Plafoniera con ventilatore.**  
Ceiling lamp with fan.



Reverse system - DC motor



	colour temp.	colour
<b>LED-ETESIA-W-FAN</b> 8031414899005		
<b>LED-ETESIA-B-FAN</b> 8031414899012		
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		25 m³ min.
livello sonoro / sound level		48 dB

Control system easy installation


Regolazione velocità ventole / Fan speed adjustment

Impostazione timer / Timer setting

Regolazione intensità di luce (dimmer) / Light intensity (dimmer)

Regolazione gradi kelvin / Adjustable white

# PONENTE

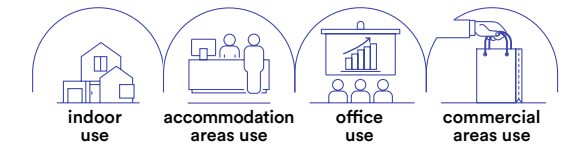

**Materiale**  
alluminio, acrilico

**Temperatura colore**  
CCT



**Materiale ventilatore**  
7 lame trasparenti  
in termoplastica

**Caratteristiche ventilatore**  
7 lame ultra  
silenziose  
rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour temperature**  
3000K / 4000K / 6500K




**Fan material**  
7 trasparent  
thermoplastic blades

**Fan characteristics**  
7 ultra-silent  
blades  
bidirectional rotation


**Driver**  
incluso



**Plafoniera con ventilatore.**  
Ceiling lamp with fan.



Reverse system - DC motor



	colour temp.	colour
<b>LED-PONENTE-FAN</b> 8031414886586		
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC 22W 6 velocità / speed	
volume aria / air volume		25 m³ min.
livello sonoro / sound level		48 dB

Control system easy installation



Regolazione velocità ventole / Fan speed adjustment

Impostazione timer / Timer setting

Regolazione intensità di luce (dimmer) / Light intensity (dimmer)

Regolazione gradi kelvin / Adjustable white

Plafoniera con ventilatore.  
Ceiling lamp with fan.

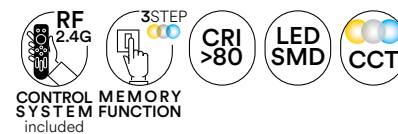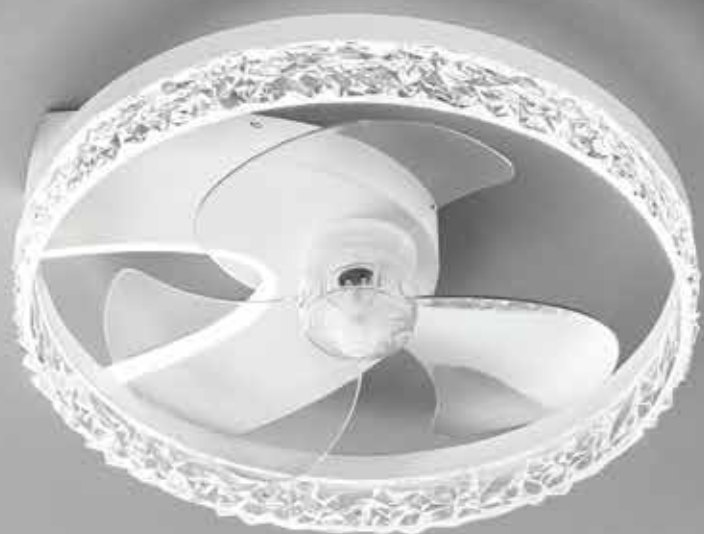

technical information




## ESPERO



**LED-ESPERO-FAN**  
8031414898992

lumen	4800 lm
led	30W 220-240V - 50/60Hz ⚡
fan	22W 220-240V - 50/60Hz Ⓜ
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	20 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

colour temp.	colour
CCT	
4800 lm	




## NASHI



**LED-NASHI-FAN**  
8031414899029

lumen	4800 lm
led	30W 220-240V - 50/60Hz ⚡
fan	22W 220-240V - 50/60Hz Ⓜ
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	20 m <sup>3</sup> min.
livello sonoro / sound level	48 dB

colour temp.	colour
CCT	
4800 lm	



**Materiale**  
alluminio, acrilico

**Temperatura colore**  
CCT



**Materiale ventilatore**  
3 lame trasparenti  
in termoplastica

**Caratteristiche ventilatore**  
3 lame ultra  
silenziose  
rotazione bilaterale

**Driver**  
incluso

**Material**  
aluminum, acrylic

**Colour temperature**  
3000K / 4000K / 6500K




**Fan material**  
3 transparent  
thermoplastic blades

**Fan characteristics**  
3 ultra-silent  
blades  
bidirectional rotation

**Driver**  
included

Reverse system - DC motor

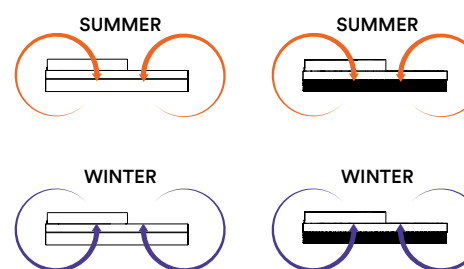


Control system easy installation

- Regolazione velocità ventole / Fan speed adjustment
- Impostazione timer / Timer setting
- Regolazione intensità di luce (dimmer) / Light intensity (dimmer)
- Regolazione gradi kelvin / Adjustable white

# INDOOR



SOTTOPENSILI E BARRE LED  
CABINETS AND LEDBARS



**Materiale**  
struttura in alluminio,  
diffusore in PC  
riflettente

**Colore**  
nikel

**Temperatura colore**  
4000K


**Driver**  
incluso

**Material**  
nikel

**Colour**  
aluminum body  
with PC  
reflective diffuser

**Colour temperature**  
4000K

**Driver**  
included

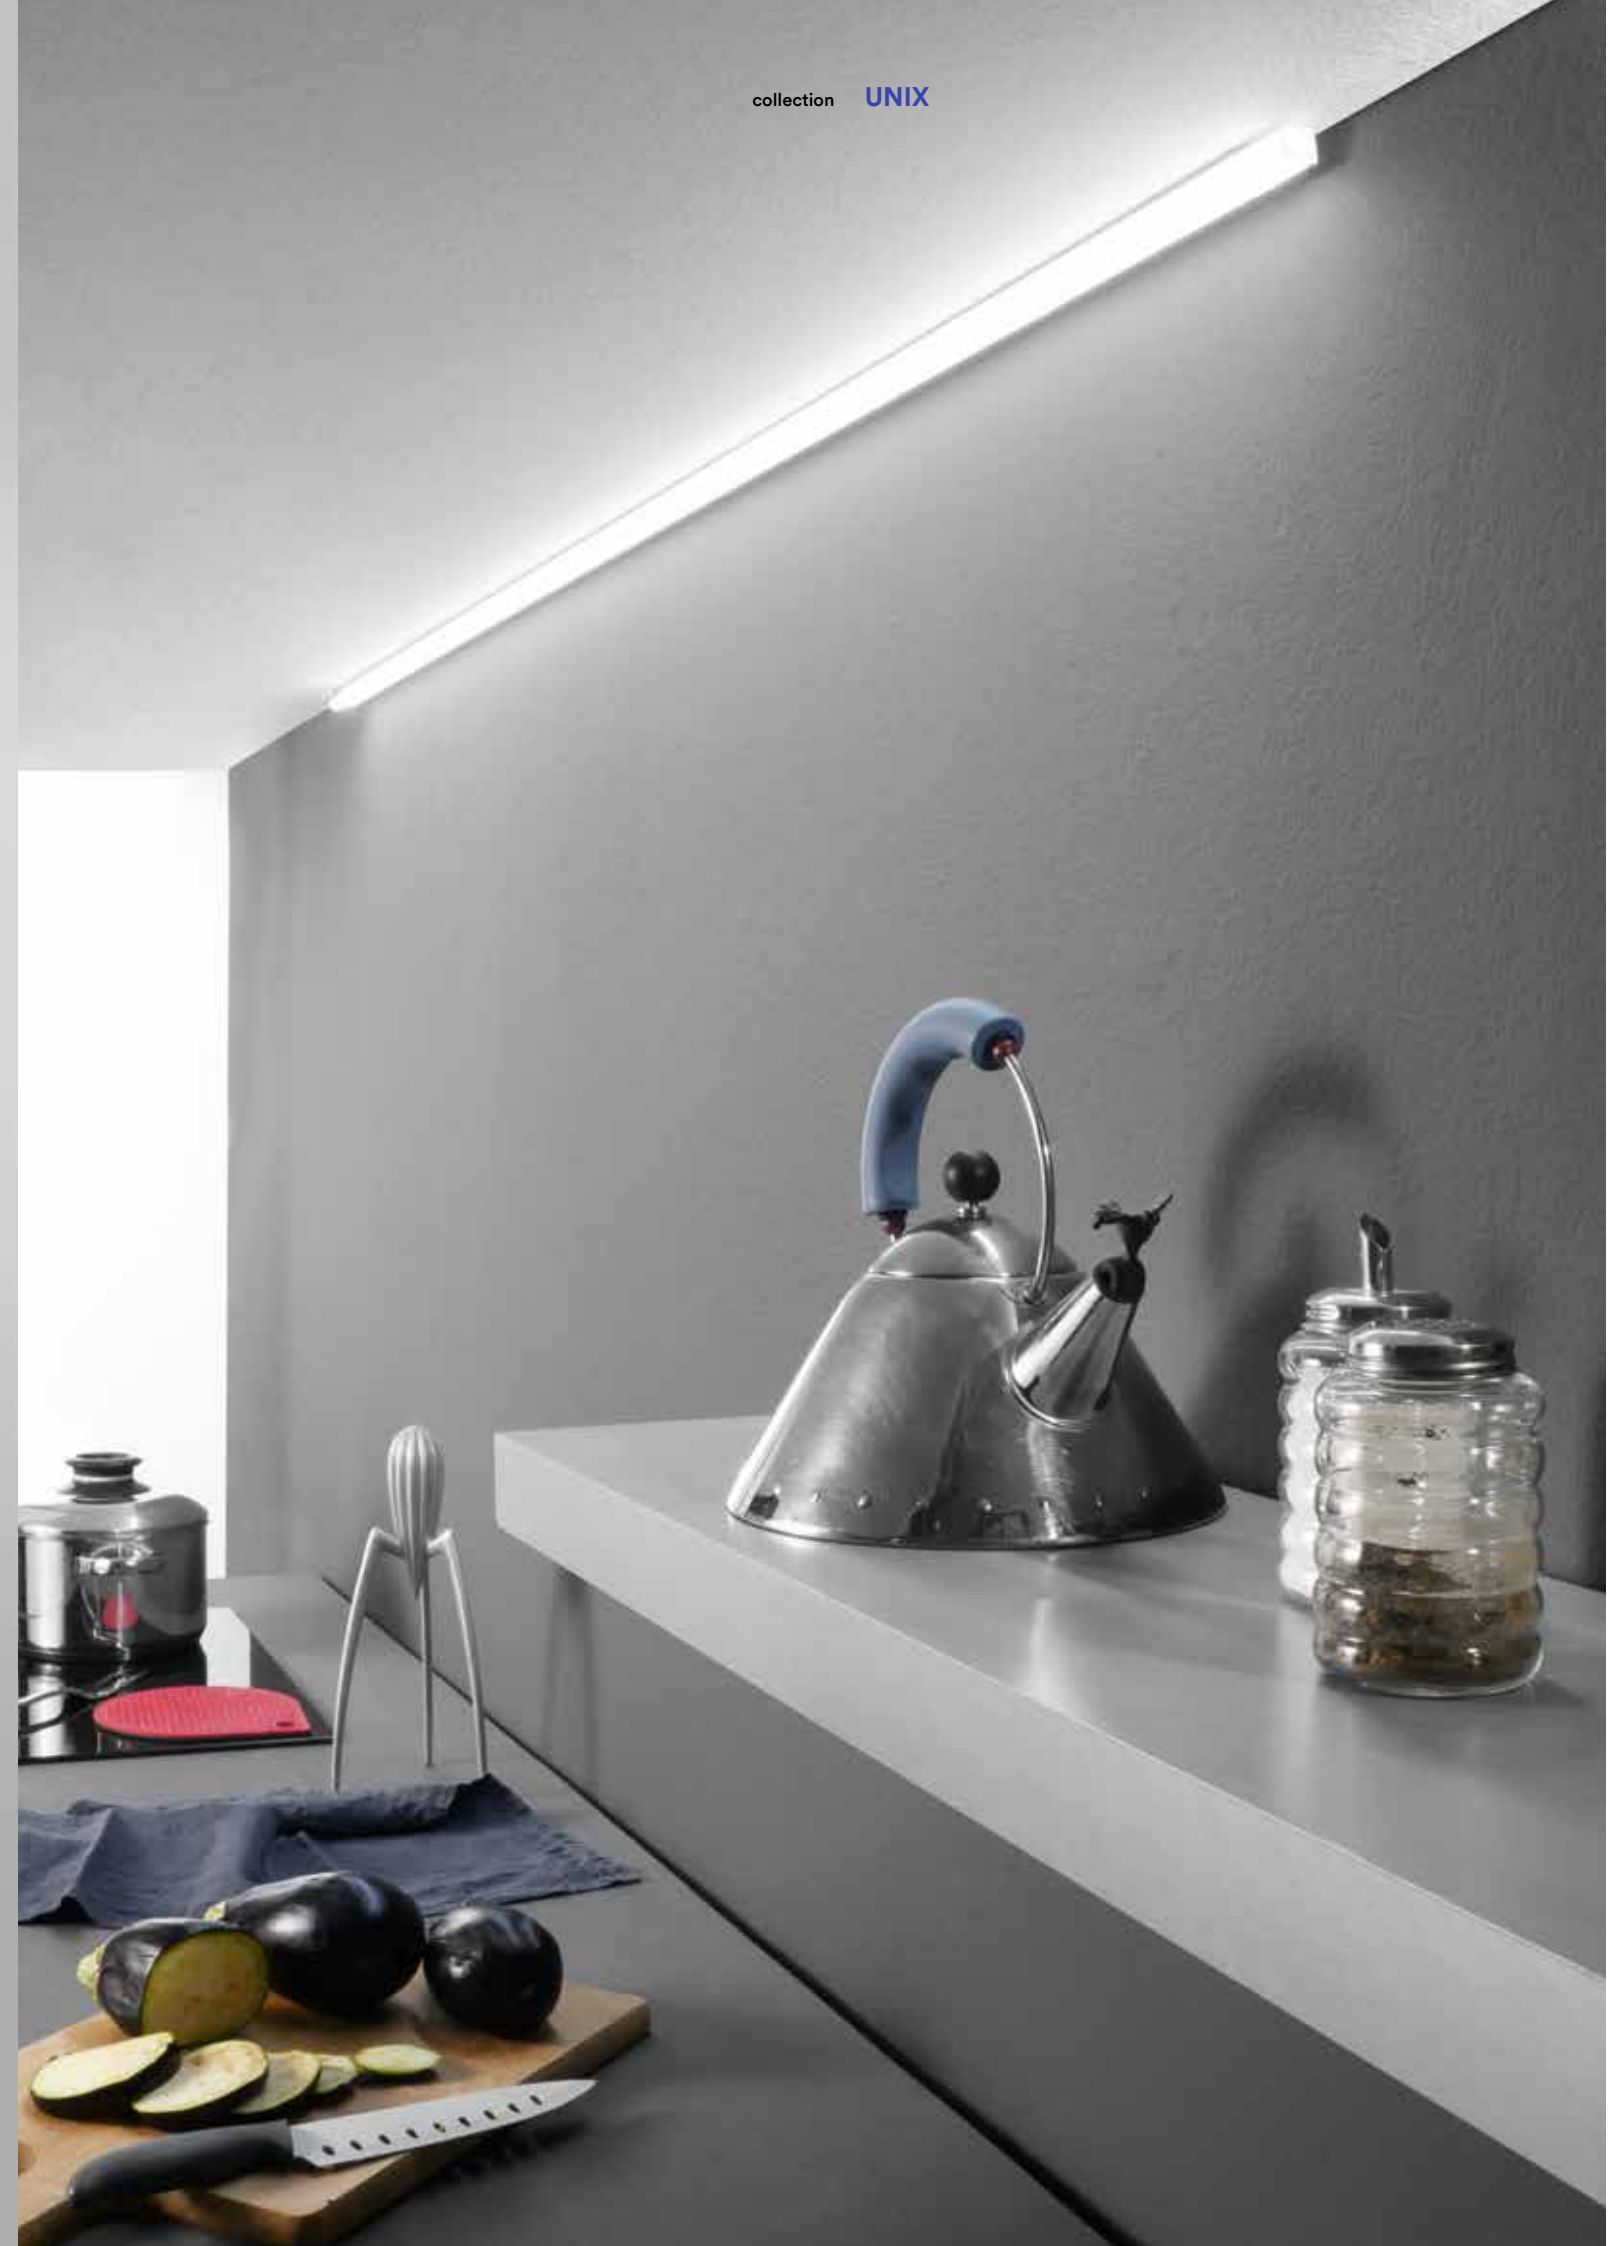



**Barra sottopensile in alluminio con diffusore in PC riflettente.**  
Cabinet bar with aluminum structure under wall unit with reflective PC diffuser.




Accessori inclusi / Included accessories




Staffe / Brackets



	colour temp.	colour
<b>LEDBAR-UNIX-30</b> 8031414866403		
lumen	658 lm	
watt	12W	
beam angle	120°	





Accessori inclusi / Included accessories




<b>LEDBAR-UNIX-45</b> 8031414864614		
lumen	978 lm	
watt	12W	
beam angle	120°	





<b>LEDBAR-UNIX-60</b> 8031414864621		
lumen	1315 lm	
watt	12W	
beam angle	120°	





<b>LEDBAR-UNIX-90</b> 8031414864492		
lumen	1974 lm	
watt	20W	
beam angle	120°	





<b>LEDBAR-UNIX-120</b> 8031414864508		
lumen	2632 lm	
watt	30W	
beam angle	120°	





<b>LEDBAR-UNIX-150</b> 8031414865185		
lumen	3290 lm	
watt	30W	
beam angle	120°	





<b>LEDBAR-UNIX-180</b> 8031414865154		
lumen	3940 lm	
watt	60W	
beam angle	120°	





<b>LEDBAR-UNIX-210</b> 8031414865161		
lumen	4600 lm	
watt	60W	
beam angle	120°	



<b>LEDBAR-UNIX-270</b> 8031414865178		
lumen	5922 lm	
watt	60W	
beam angle	120°	



<b>LEDBAR-UNIX-300</b> 8031414870738		
lumen	6580 lm	
watt	60W	
beam angle	120°	



**Barra sottopensile angolare in alluminio con diffusore in PC riflettente.**  
Angular cabinet bar with aluminum structure under wall unit with reflective PC diffuser.




Accessori inclusi / Included accessories





Staffe / Brackets


	colour temp.	colour
<b>LEDBAR-UNIX-45 ANG</b> 8031414864607		
lumen	978 lm	
watt	12W	
beam angle	120°	





<b>LEDBAR-UNIX-60 ANG</b> 8031414864478		
lumen	1315 lm	
watt	12W	
beam angle	120°	





<b>LEDBAR-UNIX-90 ANG</b> 8031414864485		
lumen	1974 lm	
watt	17,28W	
beam angle	120°	





<b>LEDBAR-UNIX-120 ANG</b> 8031414864577		
lumen	2632 lm	
watt	30W	
beam angle	120°	





<b>LEDBAR-UNIX-150 ANG</b> 8031414866373		
lumen	3290 lm	
watt	30W	
beam angle	120°	





<b>LEDBAR-UNIX-180 ANG</b> 8031414866380		
lumen	3940 lm	
watt	60W	
beam angle	120°	




<b>LEDBAR-UNIX-210 ANG</b> 8031414866359		
lumen	4600 lm	
watt	60W	
beam angle	120°	



<b>LEDBAR-UNIX-240 ANG</b> 8031414866366		
lumen	5264 lm	
watt	60W	
beam angle	120°	




<b>LEDBAR-UNIX-300 ANG</b> 8031414866342		
lumen	6580 lm	
watt	60W	
beam angle	120°	



# T8

**Barra sottopensile con struttura in alluminio a LED integrato con diffusore in PC.**

Cabinet bar with integrated LED aluminum structure for under cabinet with PC diffuser.






technical information **T8**



- Materiale**  
struttura in alluminio,  
diffusore in PC
- Colore**  
bianco
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum body  
with PC diffuser
- Colour**  
white
- Colour temperature**  
4000K
- Driver**  
built-in




	colour temp.	colour	
<b>LEDBAR-T8-60</b> 8031414875382	●	●	
lumen	850 lm		600 mm
watt		9W	28 mm
beam angle		120°	600 mm
<b>LEDBAR-T8-120</b> 8031414875399	●	●	
lumen	1700 lm		1200 mm
watt		18W	28 mm
beam angle		120°	1200 mm
<b>LEDBAR-T8-150</b> 8031414875405	●	●	
lumen	2300 lm		1500 mm
watt		24W	28 mm
beam angle		120°	1500 mm



# BATTEN

Barra ultra sottile a LED integrato.  
Ultra slim cabinet built-in LED bar.



technical information **BATTEN**



- Materiale**  
struttura in PC bianco,  
diffusore in PC bianco
- Colore**  
bianco
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
PC white body with  
PC white diffuser
- Colour**  
white
- Colour temperature**  
4000K
- Driver**  
built-in



	colour temp.	colour		Accessori inclusi / Included accessories
<b>LED-BATTEN-30</b> 8031440357722				 Staffe / Brackets
lumen	1077 lm			
watt	9W			
beam angle	120°			
<b>LED-BATTEN-60</b> 8031440357739				
lumen	2166 lm			
watt	18W			
beam angle	120°			
<b>LED-BATTEN-120</b> 8031440357746				
lumen	4252 lm			
watt	36W			
beam angle	120°			
<b>LED-BATTEN-150</b> 8031440357753				
lumen	5677 lm			
watt	48W			
beam angle	120°			

SOTTOPENSILI E BARRE LED / CABINETS AND LEDBARS  
In.tec light

# HABILIS

Barra sottopensile angolare in alluminio  
a LED integrato con diffusore in PC.  
Angular cabinet bar with integrated  
LED aluminum structure with PC diffuser.



technical information **HABILIS**



**Materiale**  
struttura in alluminio  
diffusore in PC

**Material**  
aluminum body  
with PC diffuser

**Colore**  
bianco

**Colour**  
white

**Temperatura colore**  
4000K

**Colour temperature**  
4000K

**Interruttore**  
incluso

**Switch**  
included


**Driver**  
integrato

**Driver**  
built-in

colour temp. | colour

**LED-HABILIS-AP**  
8031414881604  
lumen

● ●  
1750 lm



watt	15W
beam angle	105°
⦿	2 plug max 16A
🔌	2 USB 2.4A

# T5

**Barra sottopensile con struttura e diffusore in PC.**  
Cabinet bar with PC structure and diffuser.

**Materiale**

struttura in PC  
diffusore in PC

**Colore**  
bianco

**Temperatura colore**  
4000K

**Interruttore**  
incluso

**Driver**  
integrato

**Material**

PC white body with  
PC white diffuser

**Colour**  
white

**Colour temperature**  
4000K

**Switch**  
included

**Driver**  
built-in



technical information **T5**



	colour temp.	colour		
<b>LEDBAR-T5-30</b> 8031440354691	436 lm		310 mm	23.9 mm
watt		5W	310 mm	35.4 mm
beam angle		135°		
<b>LEDBAR-T5-60</b> 8031440354707	784 lm		570 mm	23.9 mm
watt		8W	570 mm	35.4 mm
beam angle		135°		
<b>LEDBAR-T5-90</b> 8031440354677	1249 lm		870 mm	23.9 mm
watt		12W	870 mm	35.4 mm
beam angle		135°		
<b>LEDBAR-T5-120</b> 8031440354684	1565 lm		1170 mm	23.9 mm
watt		15W	1170 mm	35.4 mm
beam angle		135°		
<b>LEDBAR-T5-150</b> 803144871742	1926 lm		1484 mm	23.9 mm
watt		18W	1484 mm	35.4 mm
beam angle		135°		



Accessori inclusi /  
Included accessories

# MOVIE

**Barra sottopensile orientabile con struttura e diffusore in PC.**  
Adjustable cabinet bar with PC structure and diffuser.

**Materiale**

struttura in PC  
diffusore in PC

**Colore**

bianco

**Temperatura colore**  
4000K



**Temperatura colore selezionabile**  
2700K / 4000K / 6500K



**Interruttore**

incluso

**Driver**

integrato

**Material**

PC body with  
PC diffuser

**Colour**

white

**Colour temperature**  
4000K



**Selectable color temperature**  
2700K / 4000K / 6500K





**Switth**

included

**Driver**


built-in




technical information **MOVIE**




**LEDBAR-MOVIE-S**  
8031414866427  
lumen




watt 6W  
beam angle 120°




**LEDBAR-MOVIE**  
8031440355100  
lumen




watt 8W  
beam angle 120°




**LEDBAR-MOVIE-L**  
8031414866441  
lumen




watt 11W  
beam angle 120°

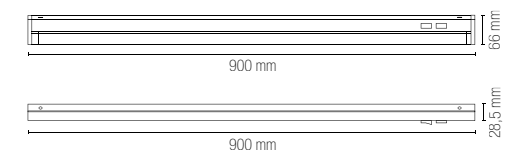

**Accessori inclusi /  
Included accessories**

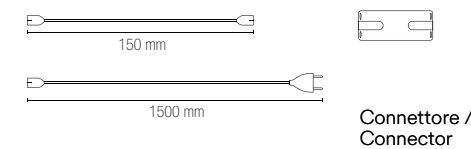


Connettore /  
Connector

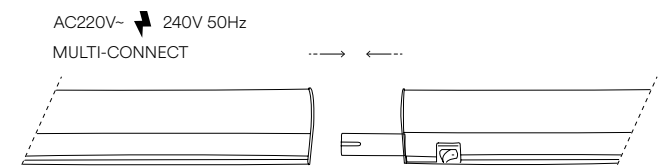

# ZAK

Lampada LED con sensore IR.  
IR sensor LED lamp.



**Materiale**  
struttura in alluminio,  
diffusore in PC  
riflettente

**Colore**  
silver

**Temperatura colore**  
3000K



**Driver**  
non incluso DC12V

**Material**  
aluminum body  
with PC reflective  
diffuser

**Colour**  
silver


**Colour temperature**  
3000K



**Driver**  
not included DC12V




technical information **ZAK**

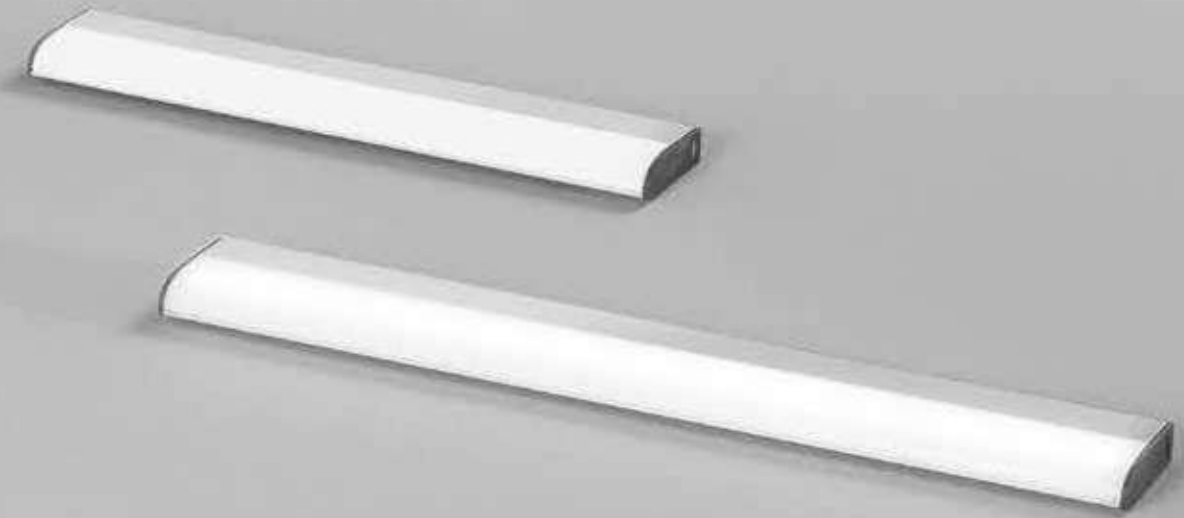

	colour temp.	colour	
<b>LEDBAT-ZAK-IR26</b> 8031414882281			
lumen	100 lm		261 mm
watt		1,20W	13,5 mm x 46 mm
beam angle		110°	
<b>LEDBAT-ZAK-IR35</b> 8031414882298			
lumen	150 lm		350 mm
watt		1,70W	13,5 mm x 46 mm
beam angle		110°	

#### Accessori inclusi / Included accessories

**IR**  
Sensore 2 funzioni /  
2 function sensor



**3.7V 160mAh**  
Batteria ricaricabile inclusa /  
Included rechargeable battery



**DC5V 0,4A Micro USB**  
Cavo / Cable

# GTO

**Materiale**  
policarbonato

**Colore**  
bianco


**Temperatura colore**  
3000K

**Material**  
polycarbonate

**Colour**  
white

**Colour temperature**  
3000K

LED  
SMD



**Lampada con sensore di movimento ricaricabile.**  
Rechargeable lamp with motion sensor.



	colour temp.	colour
<b>LEDBAT-GTO</b> 8031414882274		
lumen	105 lm	
watt	1W	

<b>Accessori inclusi / Included accessories</b>	2m in side 4m in front 120° 
Sensore di movimento / Motion sensor	25" 
<b>DC 3.7V 1A</b> Batteria ricaricabile / Rechargeable battery	2 hours 
<b>DC5V 0,4A Micro USB</b> Cavo / Cable	

# AURIKA

**Materiale**  
policarbonato

**Colore**  
bianco

**Temperatura colore**  
3000K

**Material**  
polycarbonate

**Colour**  
white

**Colour temperature**  
3000K

LED  
SMD



**Lampada LED con sensore IR.**  
IR sensor LED lamp.



	colour temp.	colour
<b>LEDBAT-AURIKA</b> 8031414882250		
lumen	100 lm	
watt	1,25W	

<b>Accessori inclusi / Included accessories</b>	ON/OFF 
IR Sensore / sensor	
<b>DC 3.7V 2.2A</b> Batteria ricaricabile / Rechargeable battery	2 hours 
<b>DC5V 0,4A Micro USB</b> Cavo / Cable	

# BLAM

**Materiale**  
alluminio

**Colore**  
struttura silver  
diffusore bianco


**Temperatura colore**  
3000K

**Material**  
aluminum

**Colour**  
silver structure  
white diffuser

**Colour temperature**  
3000K

LED  
SMD



**Lampada LED con sensore IR.**  
IR sensor LED lamp.




	colour temp.	colour
<b>LEDBAT-BLAM-IR38</b> 8031414882267		
lumen	150 lm	
watt	1,7W	

<b>Accessori inclusi / Included accessories</b>	ON/OFF 
IR Sensore / Sensor	
<b>DC 3.7V 2.2A</b> Batteria ricaricabile / Rechargeable battery	2 hours 
<b>DC5V 0,4A Micro USB</b> Cavo / Cable	





# CLOSET



**Materiale**  
policarbonato

**Colore**  
silver

**Temperatura colore**  
4000K

**Material**  
polycarbonate

**Colour**  
silver

**Colour temperature**  
4000K




**Lampada con sensore di movimento.**  
Lamp with motion sensor.



**LED-CLOSET-10**  
8031414873012

lumen


watt



colour temp.	colour
●	●
105 lm	

**Accessori inclusi /**  
**Included accessories**

Sensore di movimento /  
Motion sensor




**DC 5V 1A**  
Batteria ricaricabile /  
Rechargeable battery



**Micro USB charging wires DC 5V**  
Cavo non incluso / Not included cable



# SHELF



**Materiale**  
policarbonato

**Colore**  
struttura silver  
diffusore bianco

**Temperatura colore**  
4000K

**Material**  
polycarbonate

**Colour**  
silver structure  
white diffuser

**Colour temperature**  
4000K




**Lampada con sensore di movimento.**  
Lamp with motion sensor.



**LED-SHELF-R7**  
8031414873029

lumen


watt



colour temp.	colour
●	●
110 lm	

**Accessori inclusi /**  
**Included accessories**


Sensore di movimento /  
Motion sensor



**DC 5V 1A**  
Batteria ricaricabile /  
Rechargeable battery



**Micro USB charging wires DC 5V**  
Cavo non incluso / Not included cable



# TRIGGER

**Materiale**  
policarbonato

**Colore**  
silver

**Temperatura colore**  
4000K

**Material**  
polycarbonate

**Colour**  
silver

**Colour temperature**  
4000K



**Kit 2pz. copri cerniera.**  
Kit 2pz. hinge cover.



**LED-TRIGGER**  
8031414873005

watt




colour temp.	colour
●	●
0,2W DC12V	

**Accessorio non incluso /**  
**Not included accessory**

**2x23A**  
Batteria / Battery



Compatibile per cerniera a scatto collo "0" /  
Compatibe with "0" neck snap hinge




PROFILI E STRIP LED

PROFILES AND STRIP LED



PROFILI E STRIP LED  
PROFILES AND STRIP LED





## Profiles for recessed and surface installation

I profili per installazione a incasso o a parete sono realizzati con materiali di alta qualità e si distinguono per la loro facilità d'installazione. Garantiscono una distribuzione uniforme della luce e consentono configurazioni personalizzate. Proteggono le strisce LED durante il montaggio e si integrano perfettamente nell'ambiente circostante.

Profiles for recessed or wall installation are made of high-quality materials and are distinguished by their ease of installation. They ensure even light distribution and allow custom configurations. They protect LED strips during installation and blend seamlessly into their surroundings.



Installazione ad incasso /  
Recessed installation









Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

GORIZIA

# GORIZIA PROFILE

Profilo a rapido fissaggio  
nel cartongesso. Diffusore  
opale e tappi inclusi /  
Quick fixing profile in  
plasterboard with opal  
diffuser and caps included.

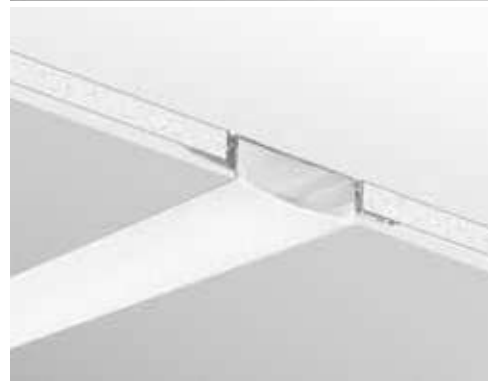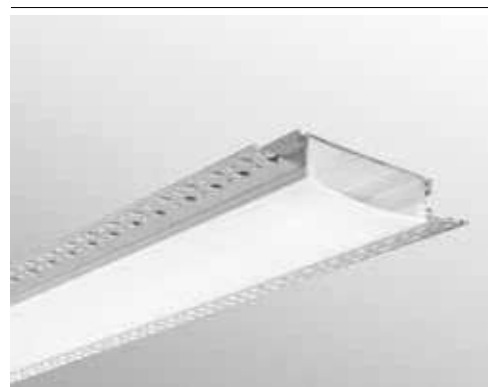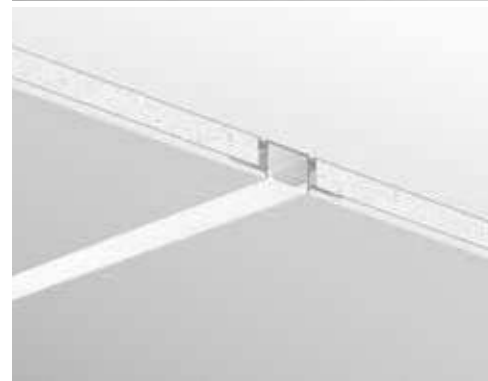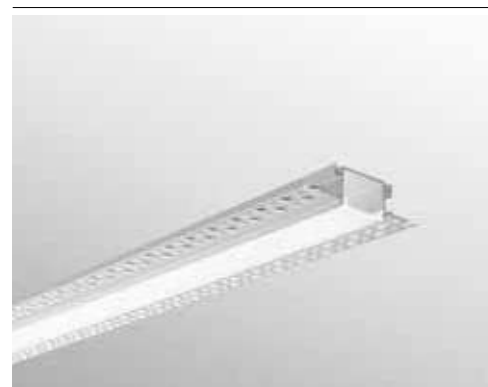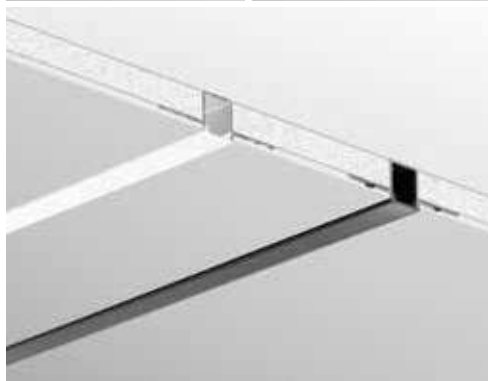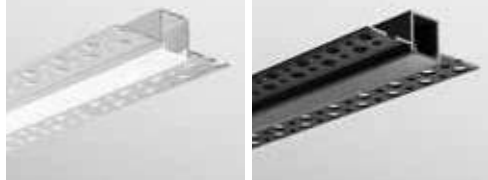

**I-PROFILO-GORIZIA-S**  
8031414876587

length	colour
2 m	aluminum

**I-PROFILO-GORIZIA-S NER**  
8031414876624




length	colour
2 m	black

**I-PROFILO-GORIZIA**  
8031414871124

length	colour
2 m	aluminum

**I-PROFILO-GORIZIA-XL**  
8031414871094

length	colour
2 m	aluminum

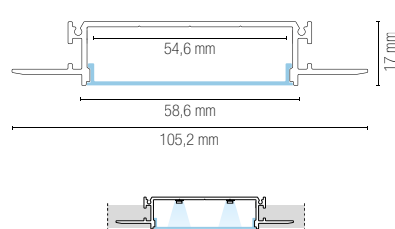

**Accessori / Accessories**

colour
2 pcs kit caps



**I-PROFILO-GORIZIA-S-CAP**  
8031414890491

colour
transparent

**I-PROFILO-GORIZIA-S-NER-CAP**  
8031414890507

colour
black

**Accessori / Accessories**

colour
2 pcs kit caps



**I-PROFILO-GORIZIA-CAP**  
8031414890484

colour
silver

**Accessori / Accessories**

colour
2 pcs kit caps



**I-PROFILO-GORIZIA-XL-CAP**  
8031414890514


colour
silver



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione ad incasso /  
Recessed installation



# BEND PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

BEND

Profilo snodabile a rapido fissaggio nel cartongesso.  
Diffusore opale e tappi inclusi /  
Articulated quick fixing profile in plasteboard  
with opal diffuser and caps included.

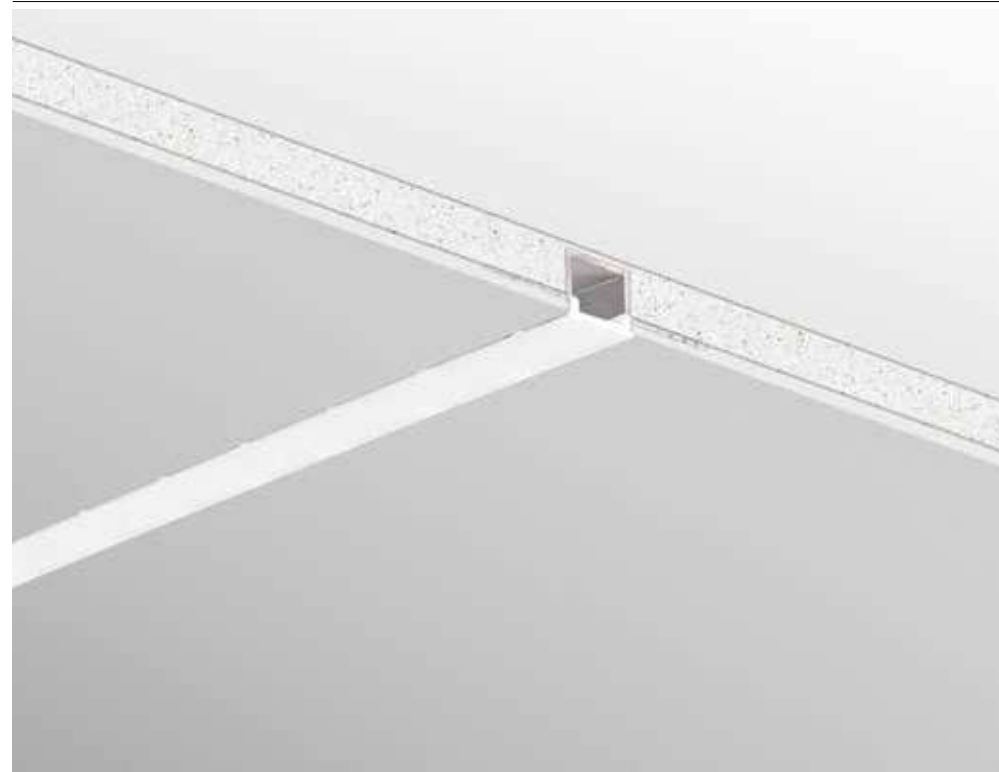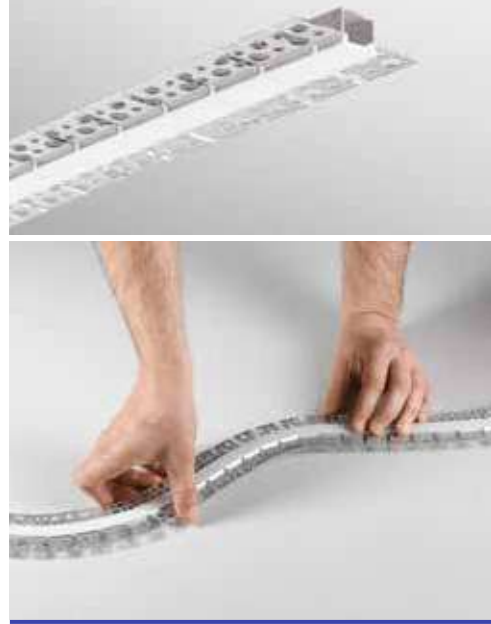

length  
colour

Accessori / Accessories  
colour



2 pcs kit caps

**I-PROFILO-BEND**  
8031414915811

2 m  
aluminum


**I-PROFILO-BEND-CAP**  
8031414923557

silver

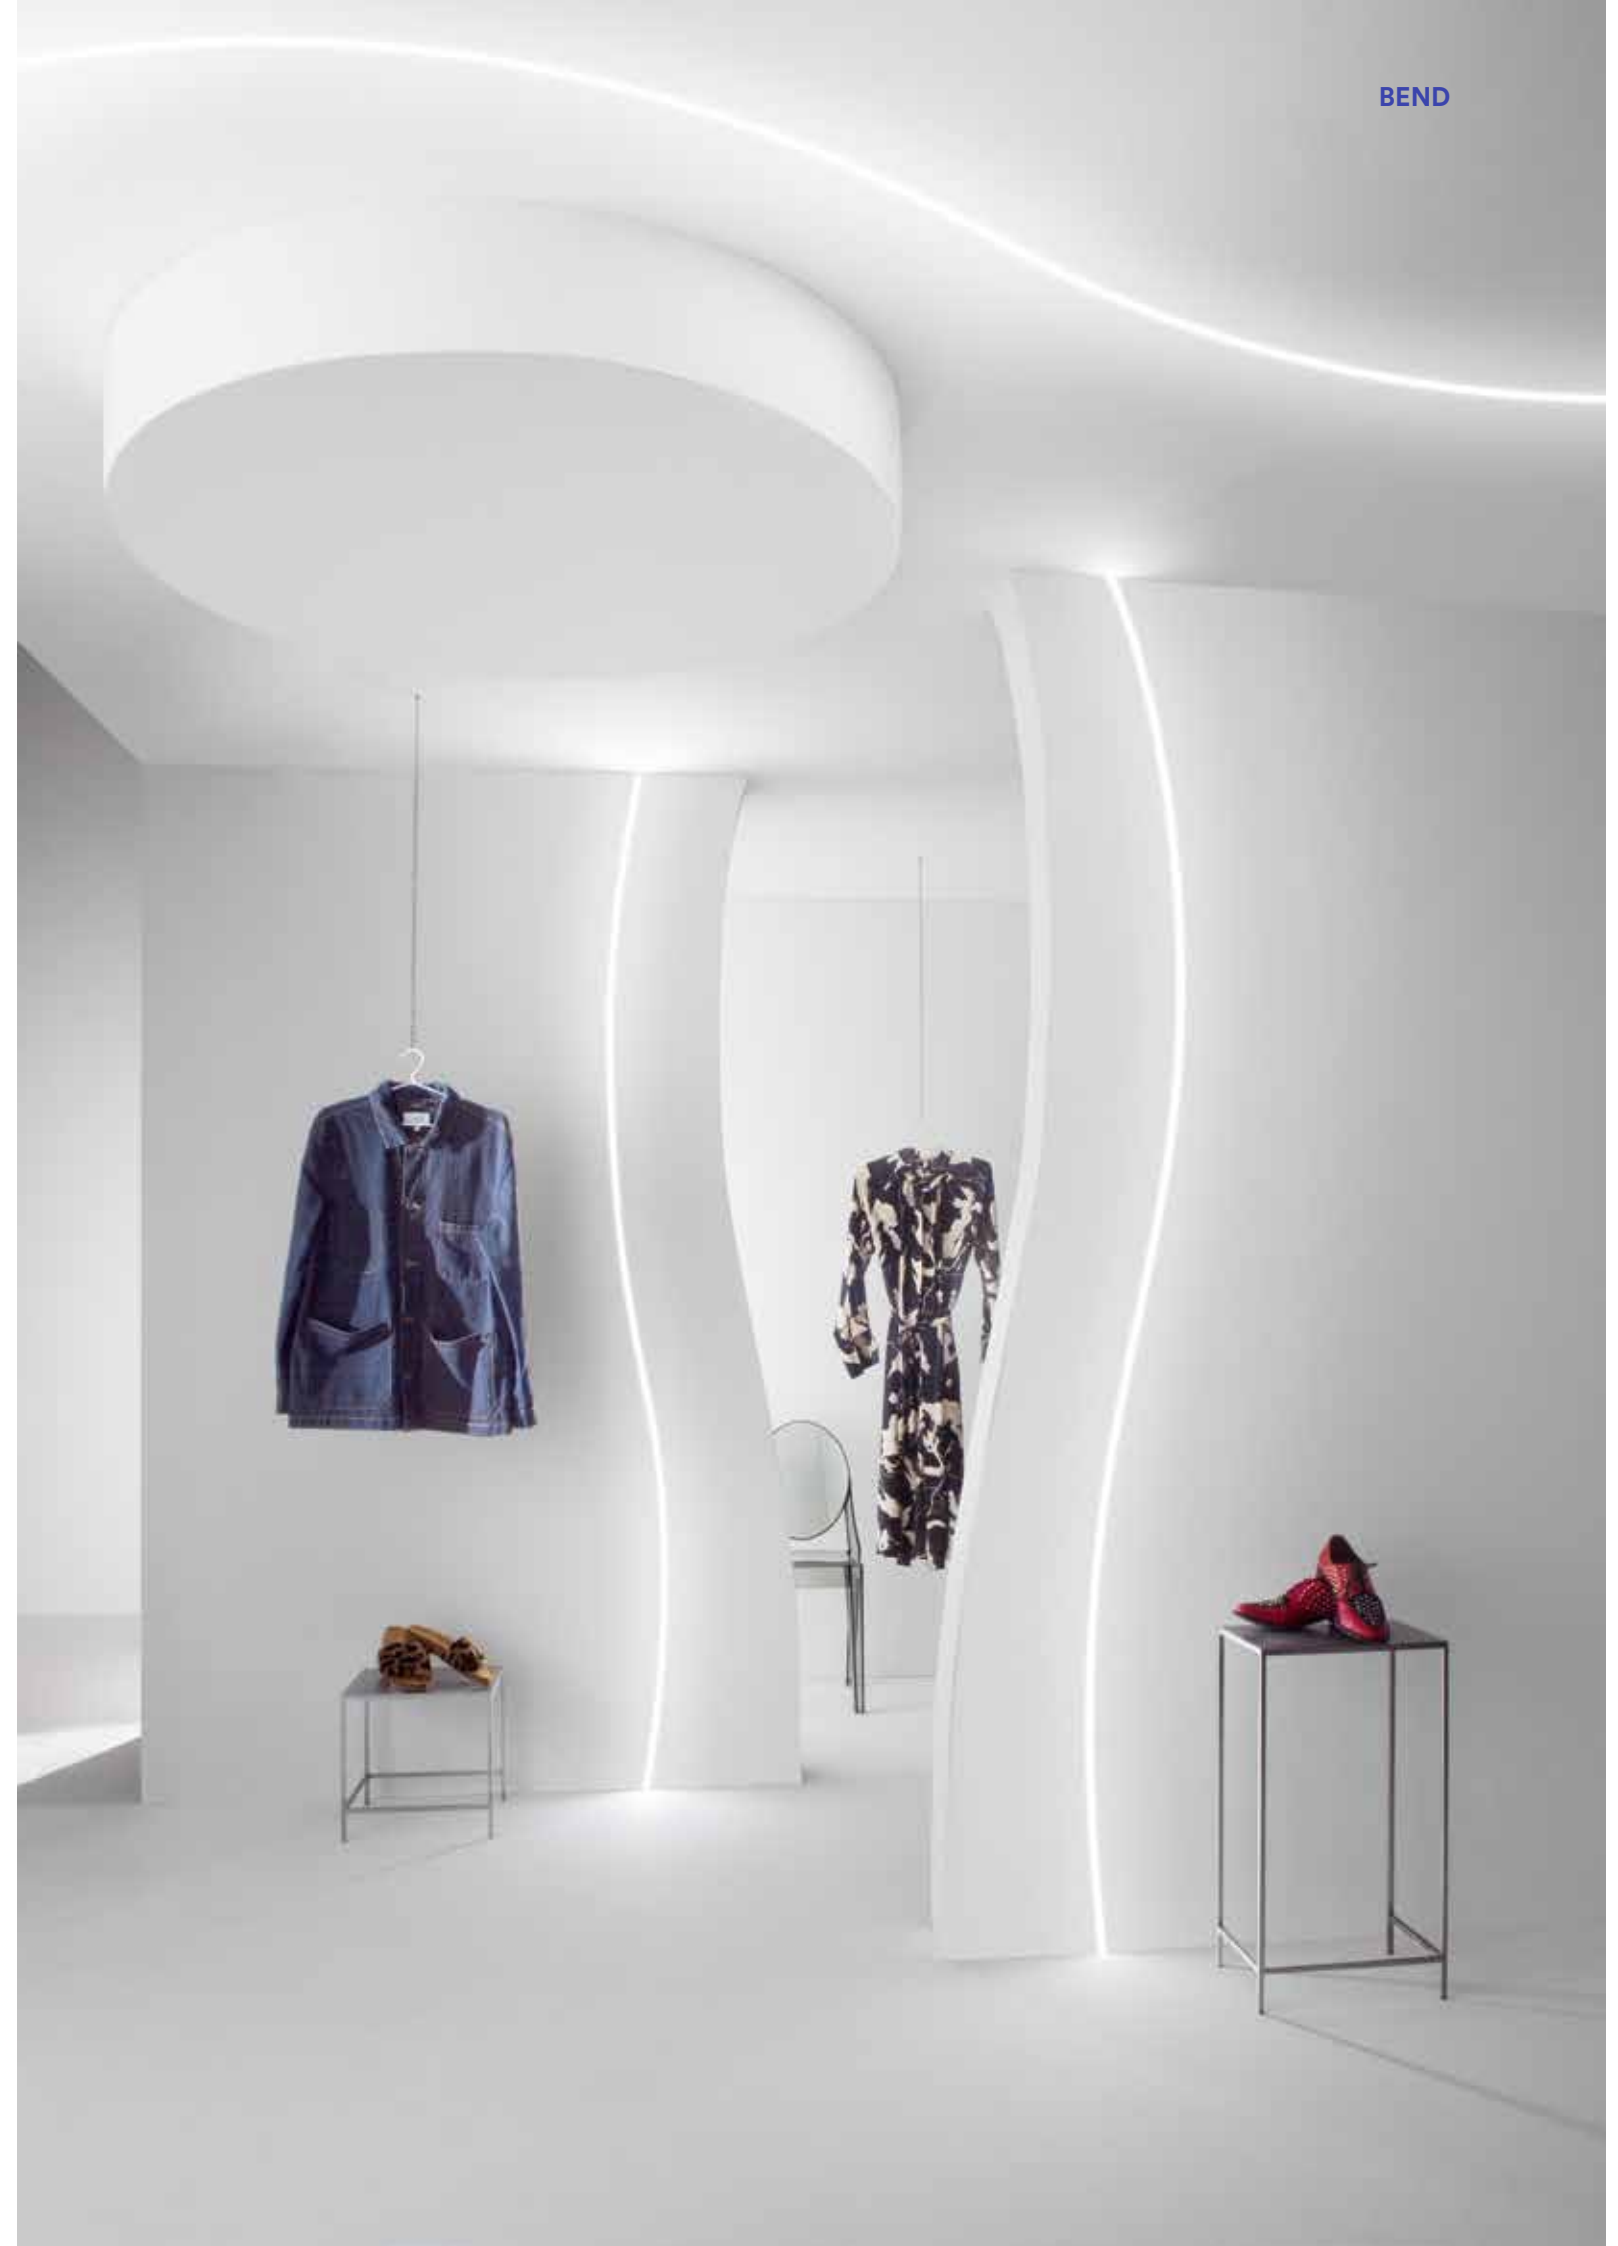

Installazione ad incasso /  
Recessed installation


# EDGE PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

EDGE

Profilo in alluminio a rapido  
fissaggio nel cartongesso,  
diffusore opale e tappi inclusi /  
Quick fixing profile in plasteboard  
with opal diffuser and caps included.

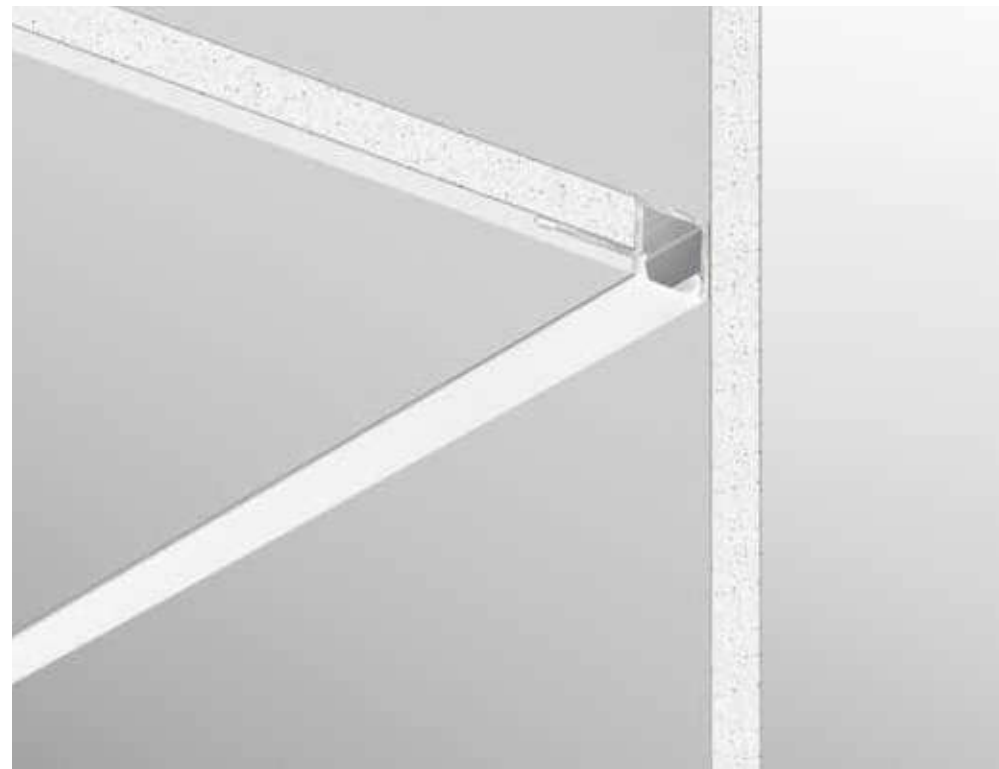

length | colour



**I-PROFILO-EDGE**  
8031414897575

2 m | aluminum

Accessori / Accessories

2 pcs kit caps






**I-PROFILO-EDGE-CAP**  
8031414897582

colour



silver

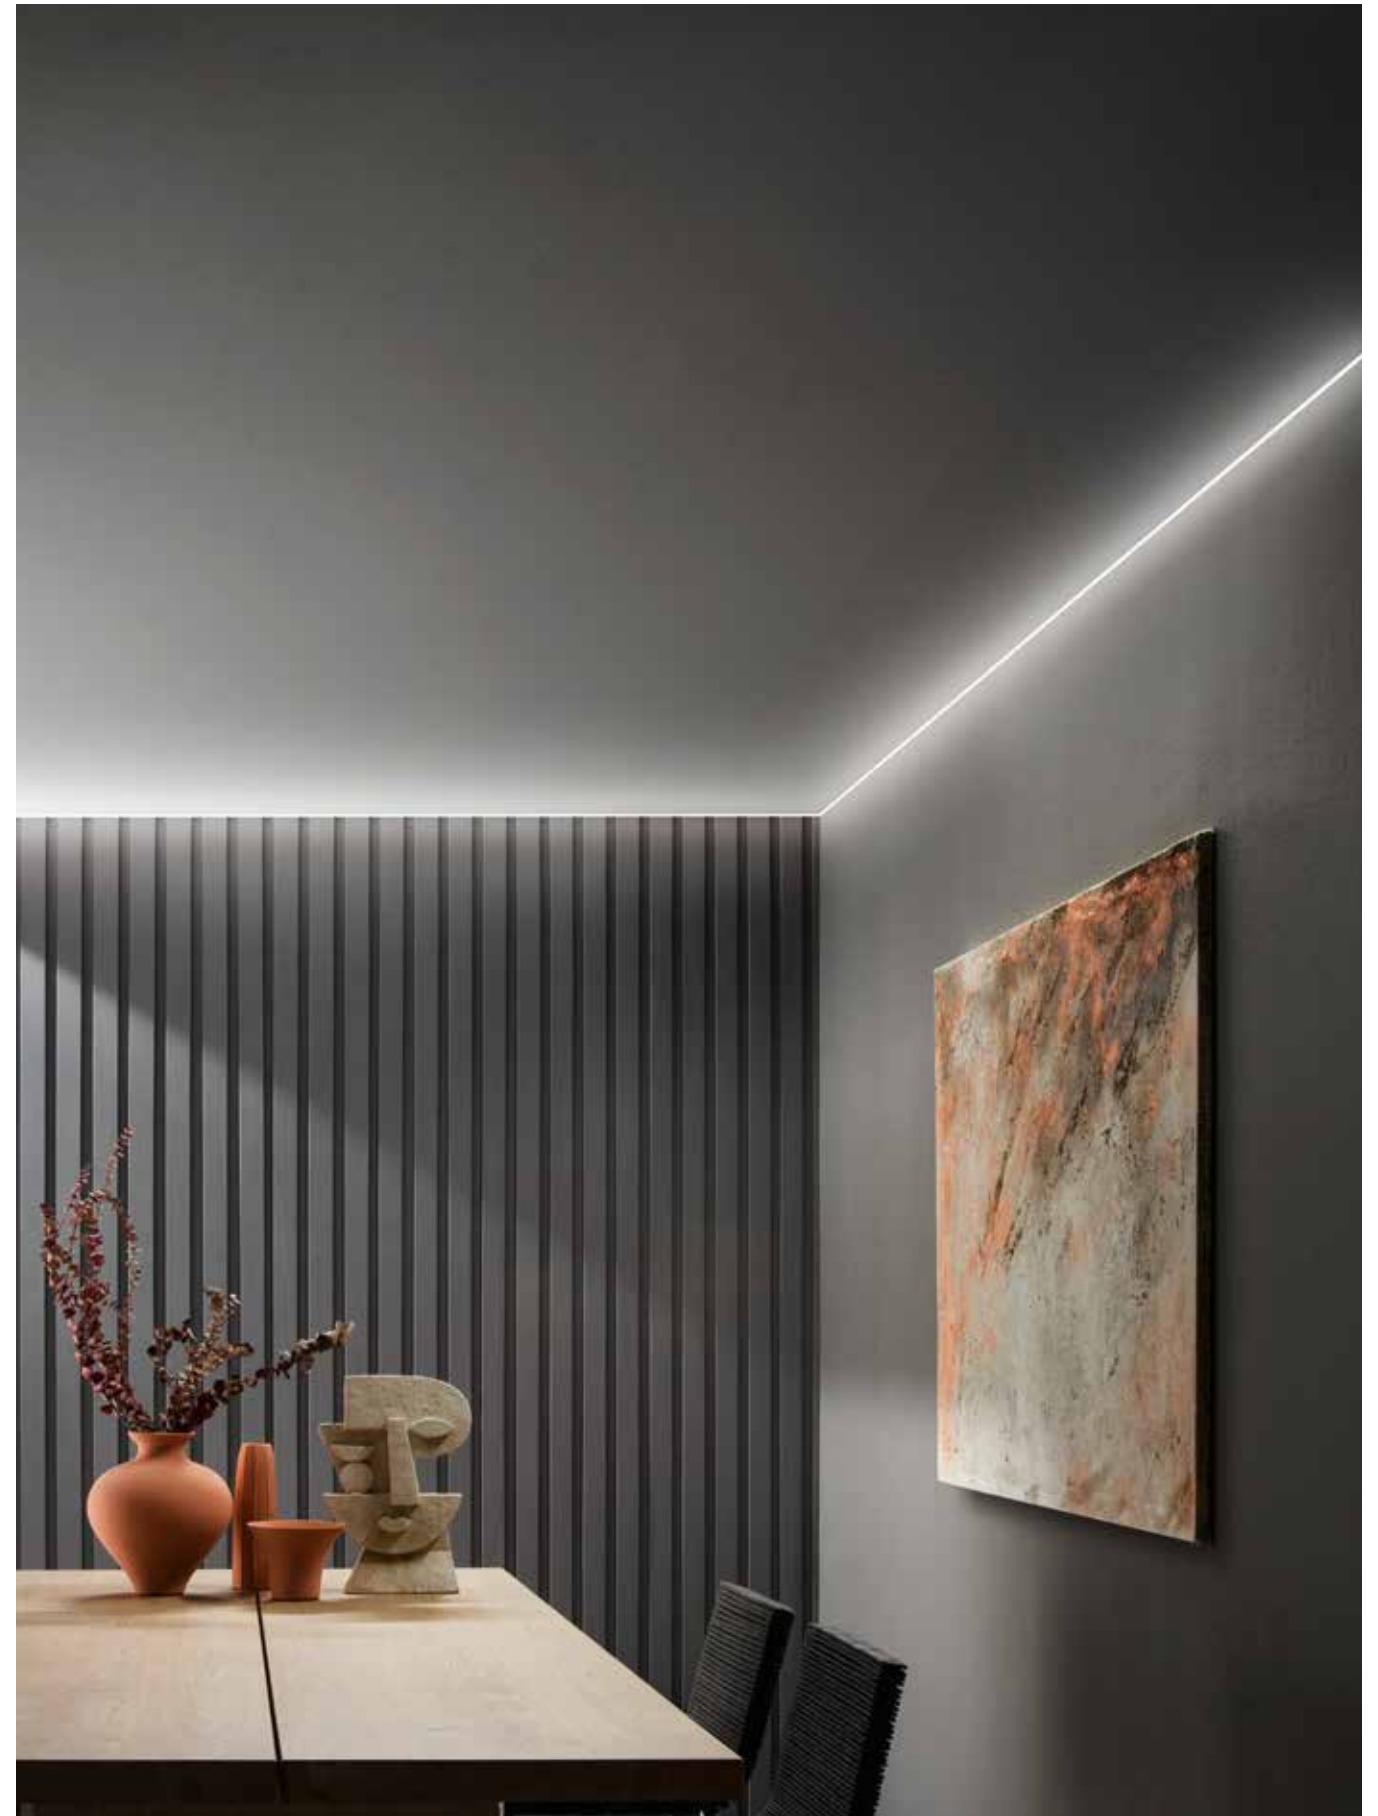



In.tec light | PROFILI E STRIP LED / PROFILES AND STRIP LED

Installazione angolare ad incasso /  
Recessed angular installation

## RIDGE PROFILE

Profilo angolare in alluminio a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi / Quick fixing angular profile in plasteboard with opal diffuser and caps included.

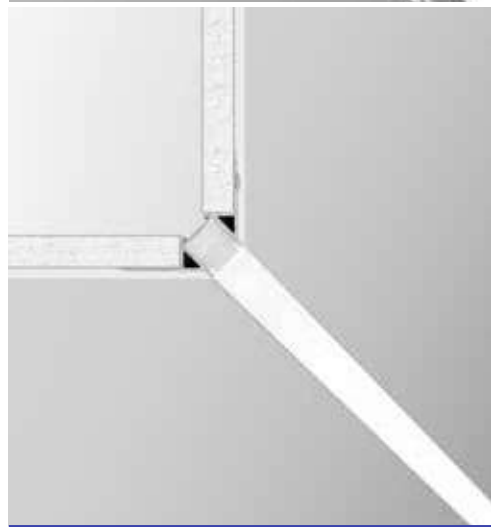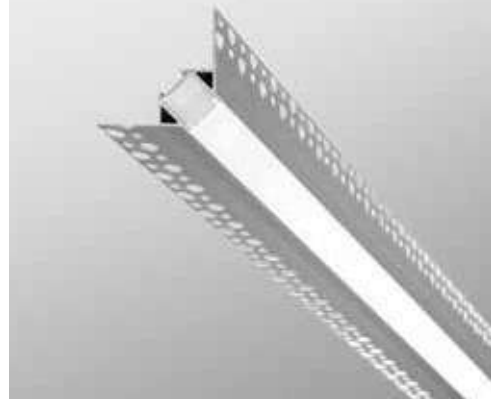

length | colour  
2 m | aluminum

**I-PROFILO-RIDGE-2**  
8031414876570

2 m | aluminum


Accessori / Accessories



2 pcs kit caps

**I-PROFILO-RIDGE-CAP**  
8031414890552

colour | aluminum




Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

Installazione angolare ad incasso /  
Recessed angular installation

## ANGLE PROFILE

Profilo angolare in alluminio a rapido fissaggio nel cartongesso, diffusore opale e tappi inclusi / Quick fixing angular profile in plasteboard with opal diffuser and caps included.

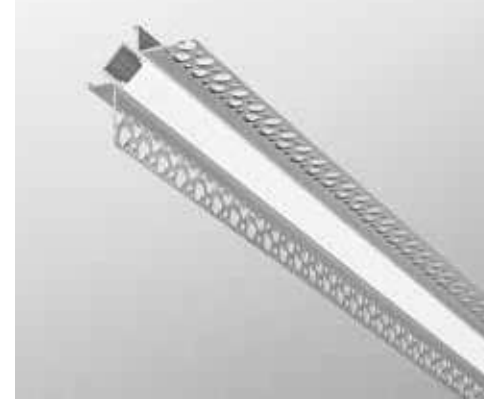


length | colour  
2 m | aluminum

**I-PROFILO-ANGLE**  
8031414915798

2 m | aluminum


Accessori / Accessories







2 pcs kit caps

**I-PROFILO-ANGLE-CAP**  
8031414923540


colour | aluminum



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435




Installazione ad incasso /  
Recessed installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



# BERLINO PROFILE

Profilo a rapido fissaggio nel  
cartongesso o superfici esterne,  
diffusore disponibile in due  
varianti, tappi e staffe incluse /  
Quick-fixing profile in  
plasterboard or exterior surfaces,  
diffuser available in two variants,  
caps and brackets included.

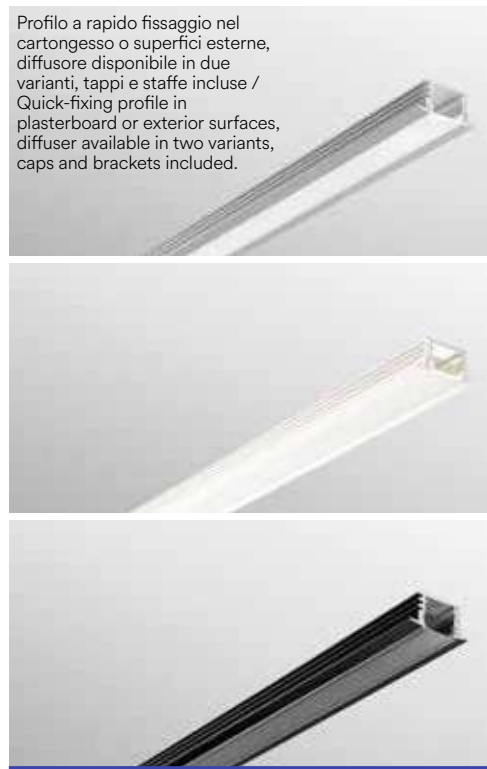

length | colour

<b>I-PROFILO-BERLINO</b> 8031434611212	1 m	aluminum
<b>I-PROFILO-BERLINO-2</b> 8031440359405	2 m	aluminum
<b>I-PROFILO-BERLINO-2 BCO</b> 8031414871070	2 m	white
<b>I-PROFILO-BERLINO-2 NER</b> 8031414876617	2 m	black

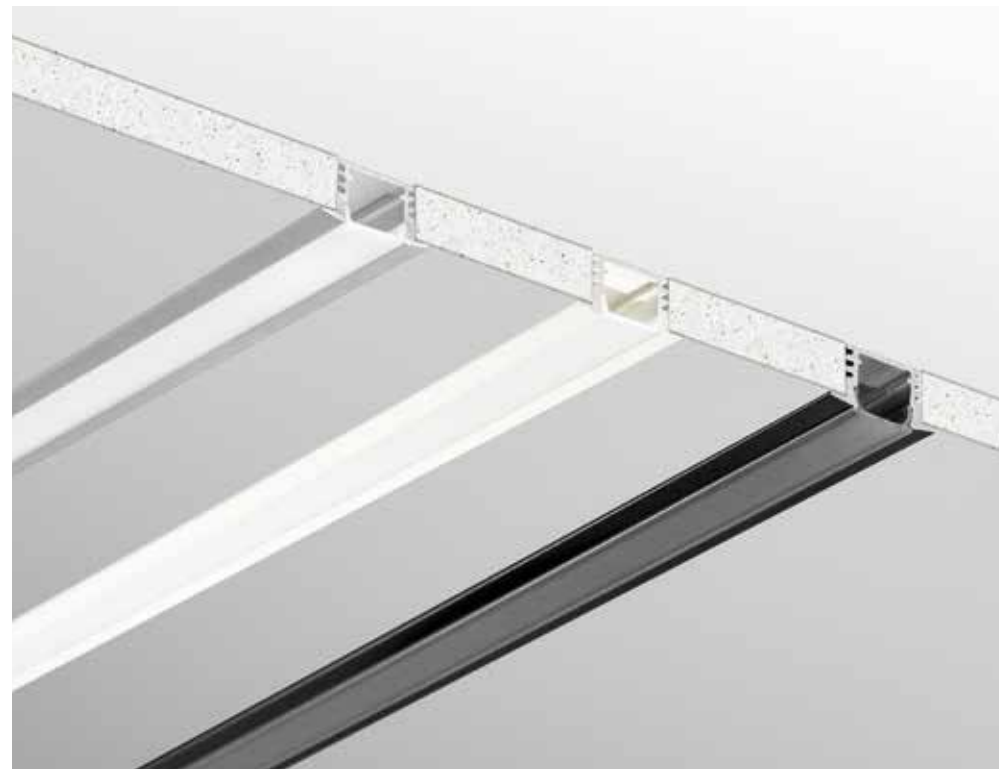

Accessori / Accessories

	2 m PC trasparent diffuser <b>I-PROF-BERLINO2-DIFF</b> 8031440357647	transparent
	2 pcs kit caps <b>I-PROFILO-BERLINO-CAP</b> 8031414890446	silver
	<b>I-PROFILO-BERLINO-BCO-CAP</b> 8031414890453	white
	<b>I-PROFILO-BERLINO-NER-CAP</b> 8031414890460	black


BERLINO



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED



Installazione ad incasso o a superficie /  
Recessed or surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

ROMA

# ROMA PROFILE



Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore disponibile in due varianti, tappi e staffe incluse / Quick-fixing profile in plasterboard or exterior surfaces, diffuser available in two variants, caps and brackets included.



length | colour


<b>I-PROFILO-ROMA</b> 8031434601213	1 m	aluminum
<b>I-PROFILO-ROMA-2</b> 8031440359399	2 m	aluminum
<b>I-PROFILO-ROMA-2 NER</b> 8031414876600	2 m	black

Accessori / Accessories		colour
	2 m PC trasparente diffusore <b>I-PROF-ROMA2-DIFF</b> 8031440357630	transparent
	2 pcs kit caps <b>I-PROFILO-ROMA-CAP</b> 8031414890569	silver
	<b>I-PROFILO-ROMA-NER-CAP</b> 8031414890576	black



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione ad incasso o a superficie /  
Recessed or surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

# MICRO PROFILE


Profilo a rapido fissaggio  
nel cartongesso o superfici  
esterne, diffusore opale,  
tappi e staffe inclusi /  
Quick-fixing profile in  
plasterboard or exterior  
surfaces, opal diffuser, caps  
and brackets included.



length  
2 m  
colour  
aluminum

**I-PROFILO-MICRO**  
8031414888740

2 m aluminum



Accessori / Accessories




2 pcs kit caps

**I-PROFILO-MICRO-CAP**  
8031414888757

colour  
silver




Installazione ad incasso /  
Recessed installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

# INCRO PROFILE



Profilo a rapido fissaggio  
nel cartongesso o superfici  
esterne, diffusore opale,  
tappi e staffe inclusi /  
Quick-fixing profile in  
plasterboard or exterior  
surfaces, opal diffuser, caps  
and brackets included.

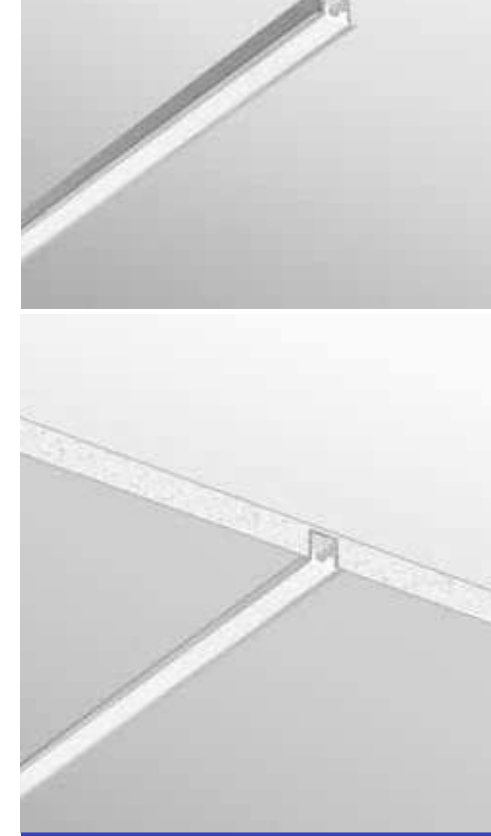

length  
2 m  
colour  
aluminum

**I-PROFILO-INCRO**  
8031414888764

2 m aluminum



Accessori / Accessories




2 pcs kit caps

**I-PROFILO-INCRO-CAP**  
8031414888771

colour  
silver



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

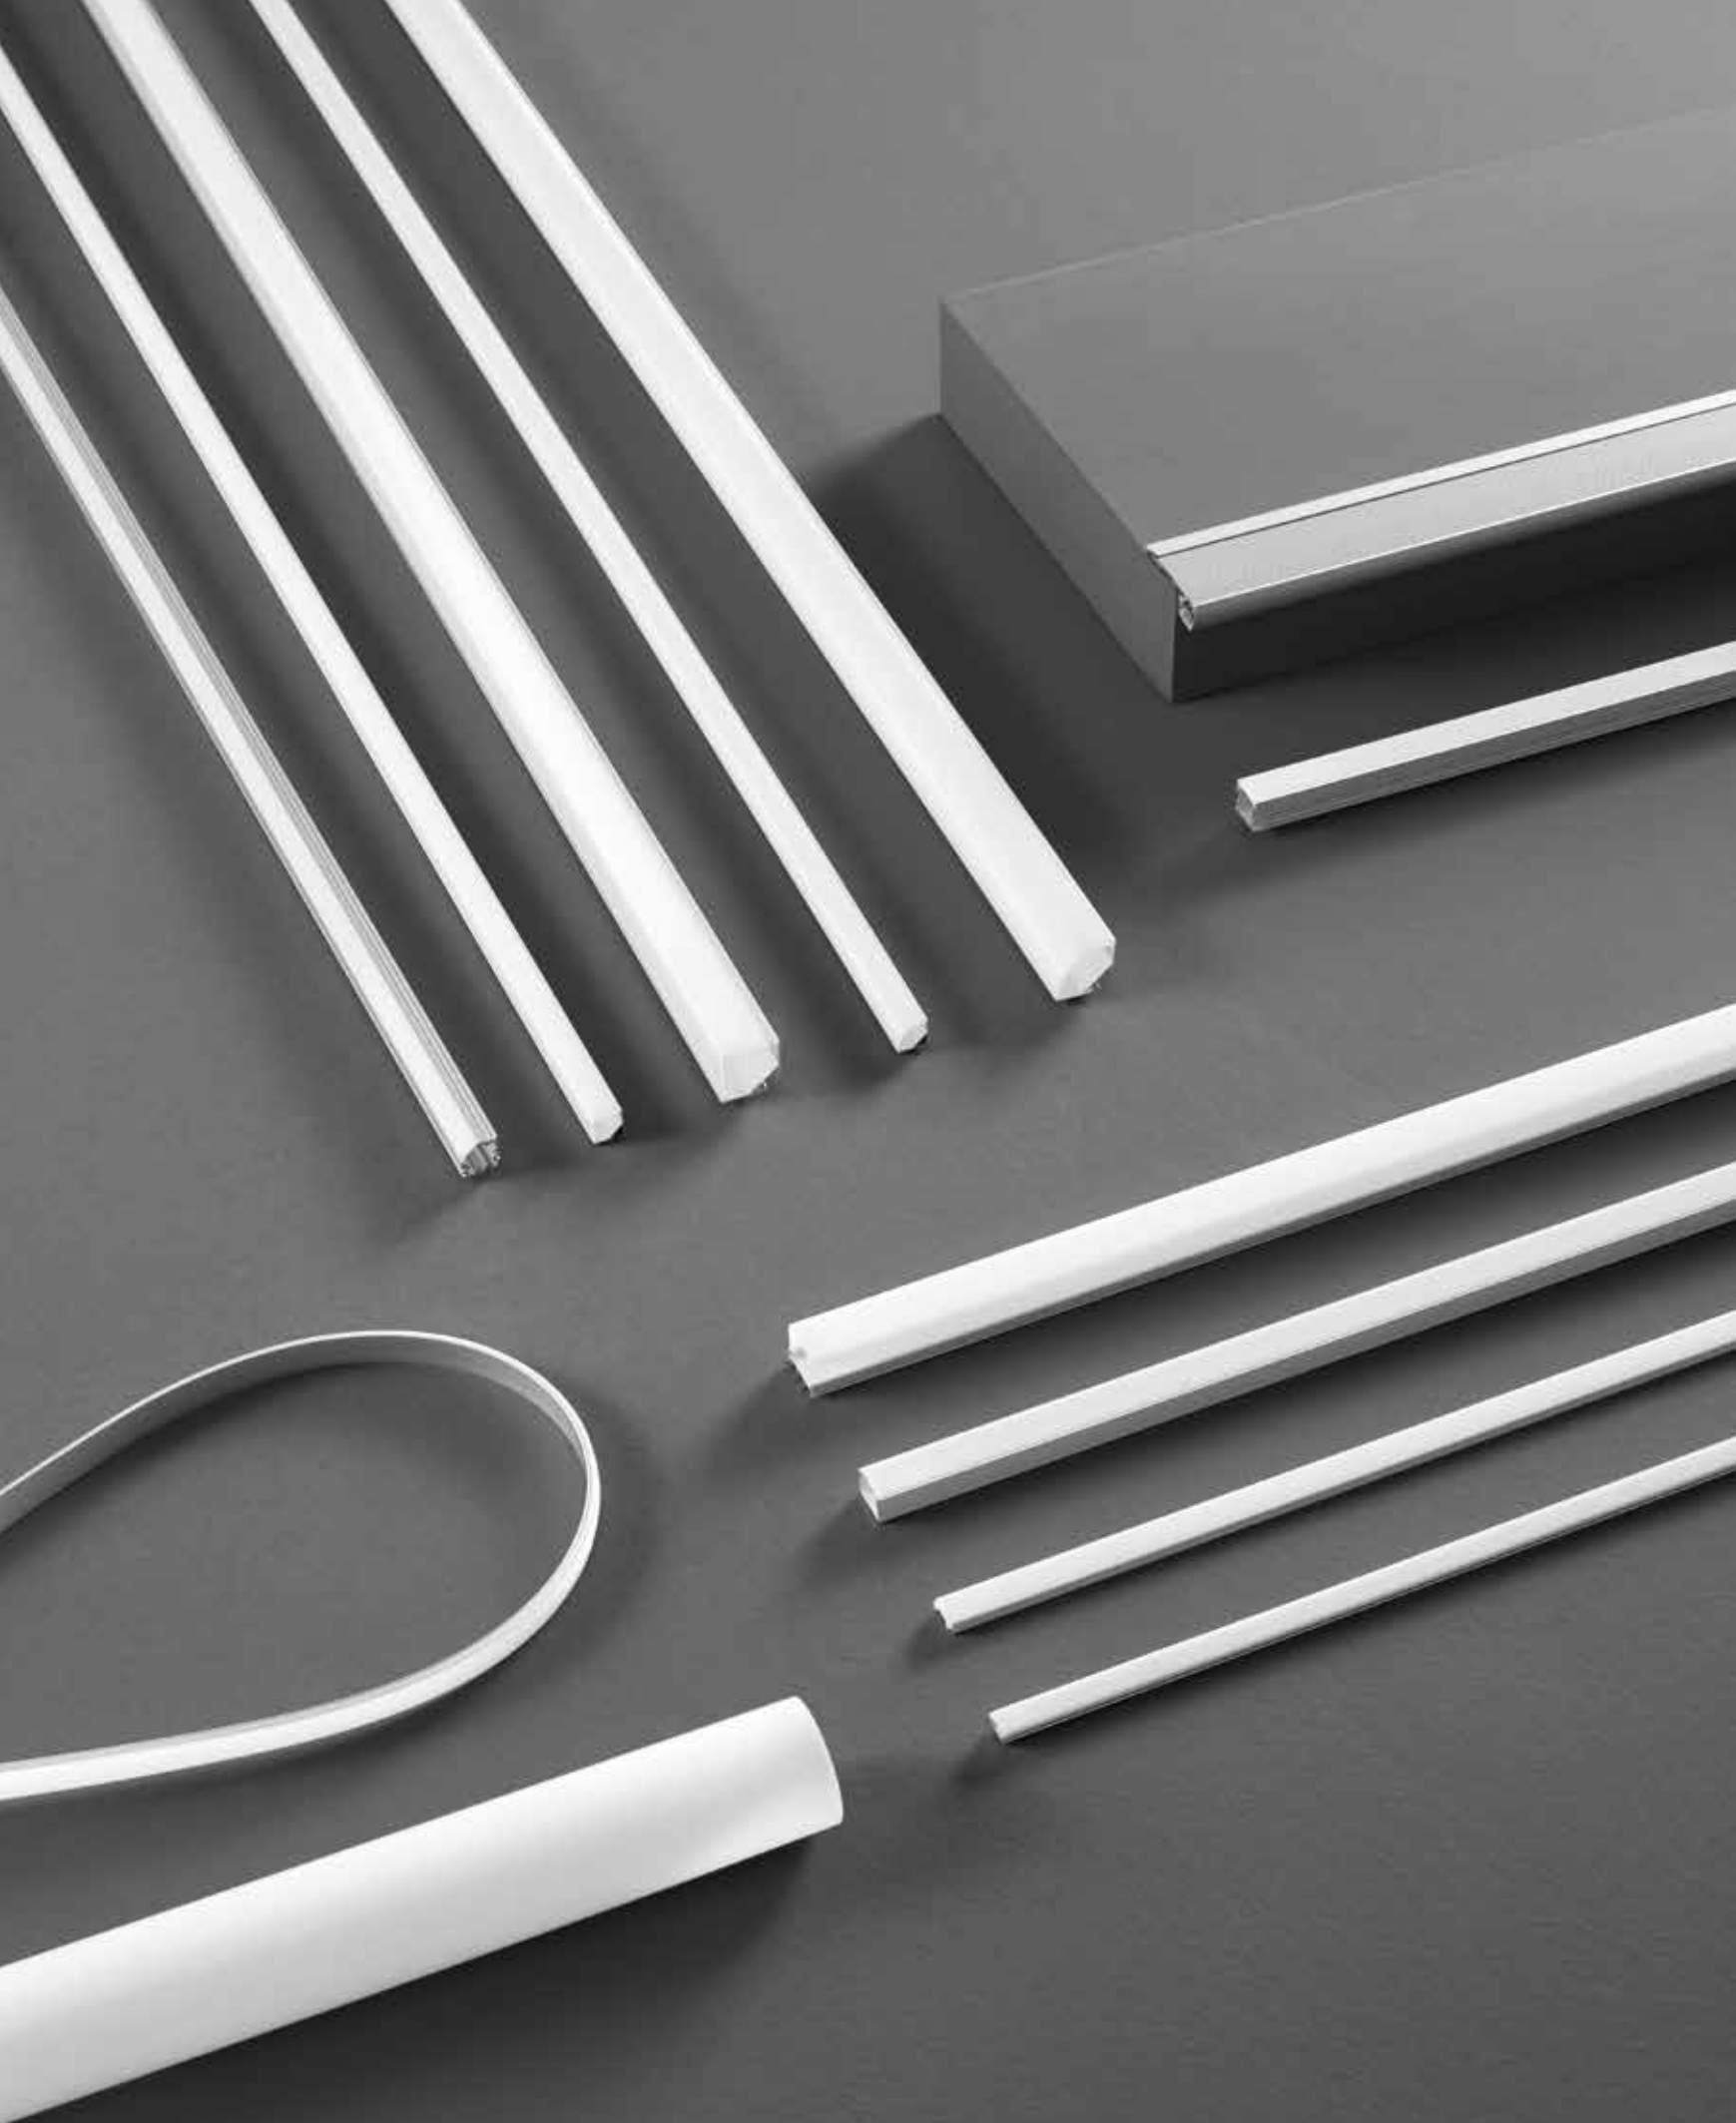

## Profiles for surface installation

**I profili per installazione a superficie (lineari, flessibili e angolari) sono progettati per cartongesso e muratura. Offrono un supporto resistente per l'illuminazione a LED, proteggendo le strisce durante l'installazione.**


**Il design moderno consente configurazioni personalizzate per adattarsi a diverse esigenze architettoniche.**

Surface installation profiles (linear, flexible, and angular profiles) are designed for drywall and masonry. They offer durable support for LED lighting, protecting the strips during installation. The modern design allows custom configurations to suit different architectural needs.



Installazione a superficie /  
Surface installation

# LOOP PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

LOOP

Profilo in alluminio per installazione a muro/soffitto o sospensione, diffusore a emissione a 180°, tappi e staffe inclusi / Aluminum profile for wall/ceiling installation or suspension, 180° emission diffuser, caps and brackets included.



length  
2 m

colour  
aluminum

**I-PROFILO-LOOP-2**  
8031414881840

2 m  
aluminum

Accessori / Accessories



2 pcs kit caps




**I-PROFILO-LOOP-CAP**  
8031414881857

colour  
silver

silver



Installazione a superficie /  
Surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

LINEA

# LINEA PROFILE

Profilo in alluminio,  
tappi e staffe inclusi /  
Aluminum profile, caps  
and brackets included



length | colour

**I-PROFILO-LINEA-2-BCO**  
8031414881963

2 m | white

**I-PROFILO-LINEA-2-NER**  
8031414881987

2 m | black

Accessori / Accessories

2 pcs kit caps





**I-PROFILO-LINEA-BCO-CAP**  
8031414881970

white




**I-PROFILO-LINEA-NER-CAP**  
8031414882199

black

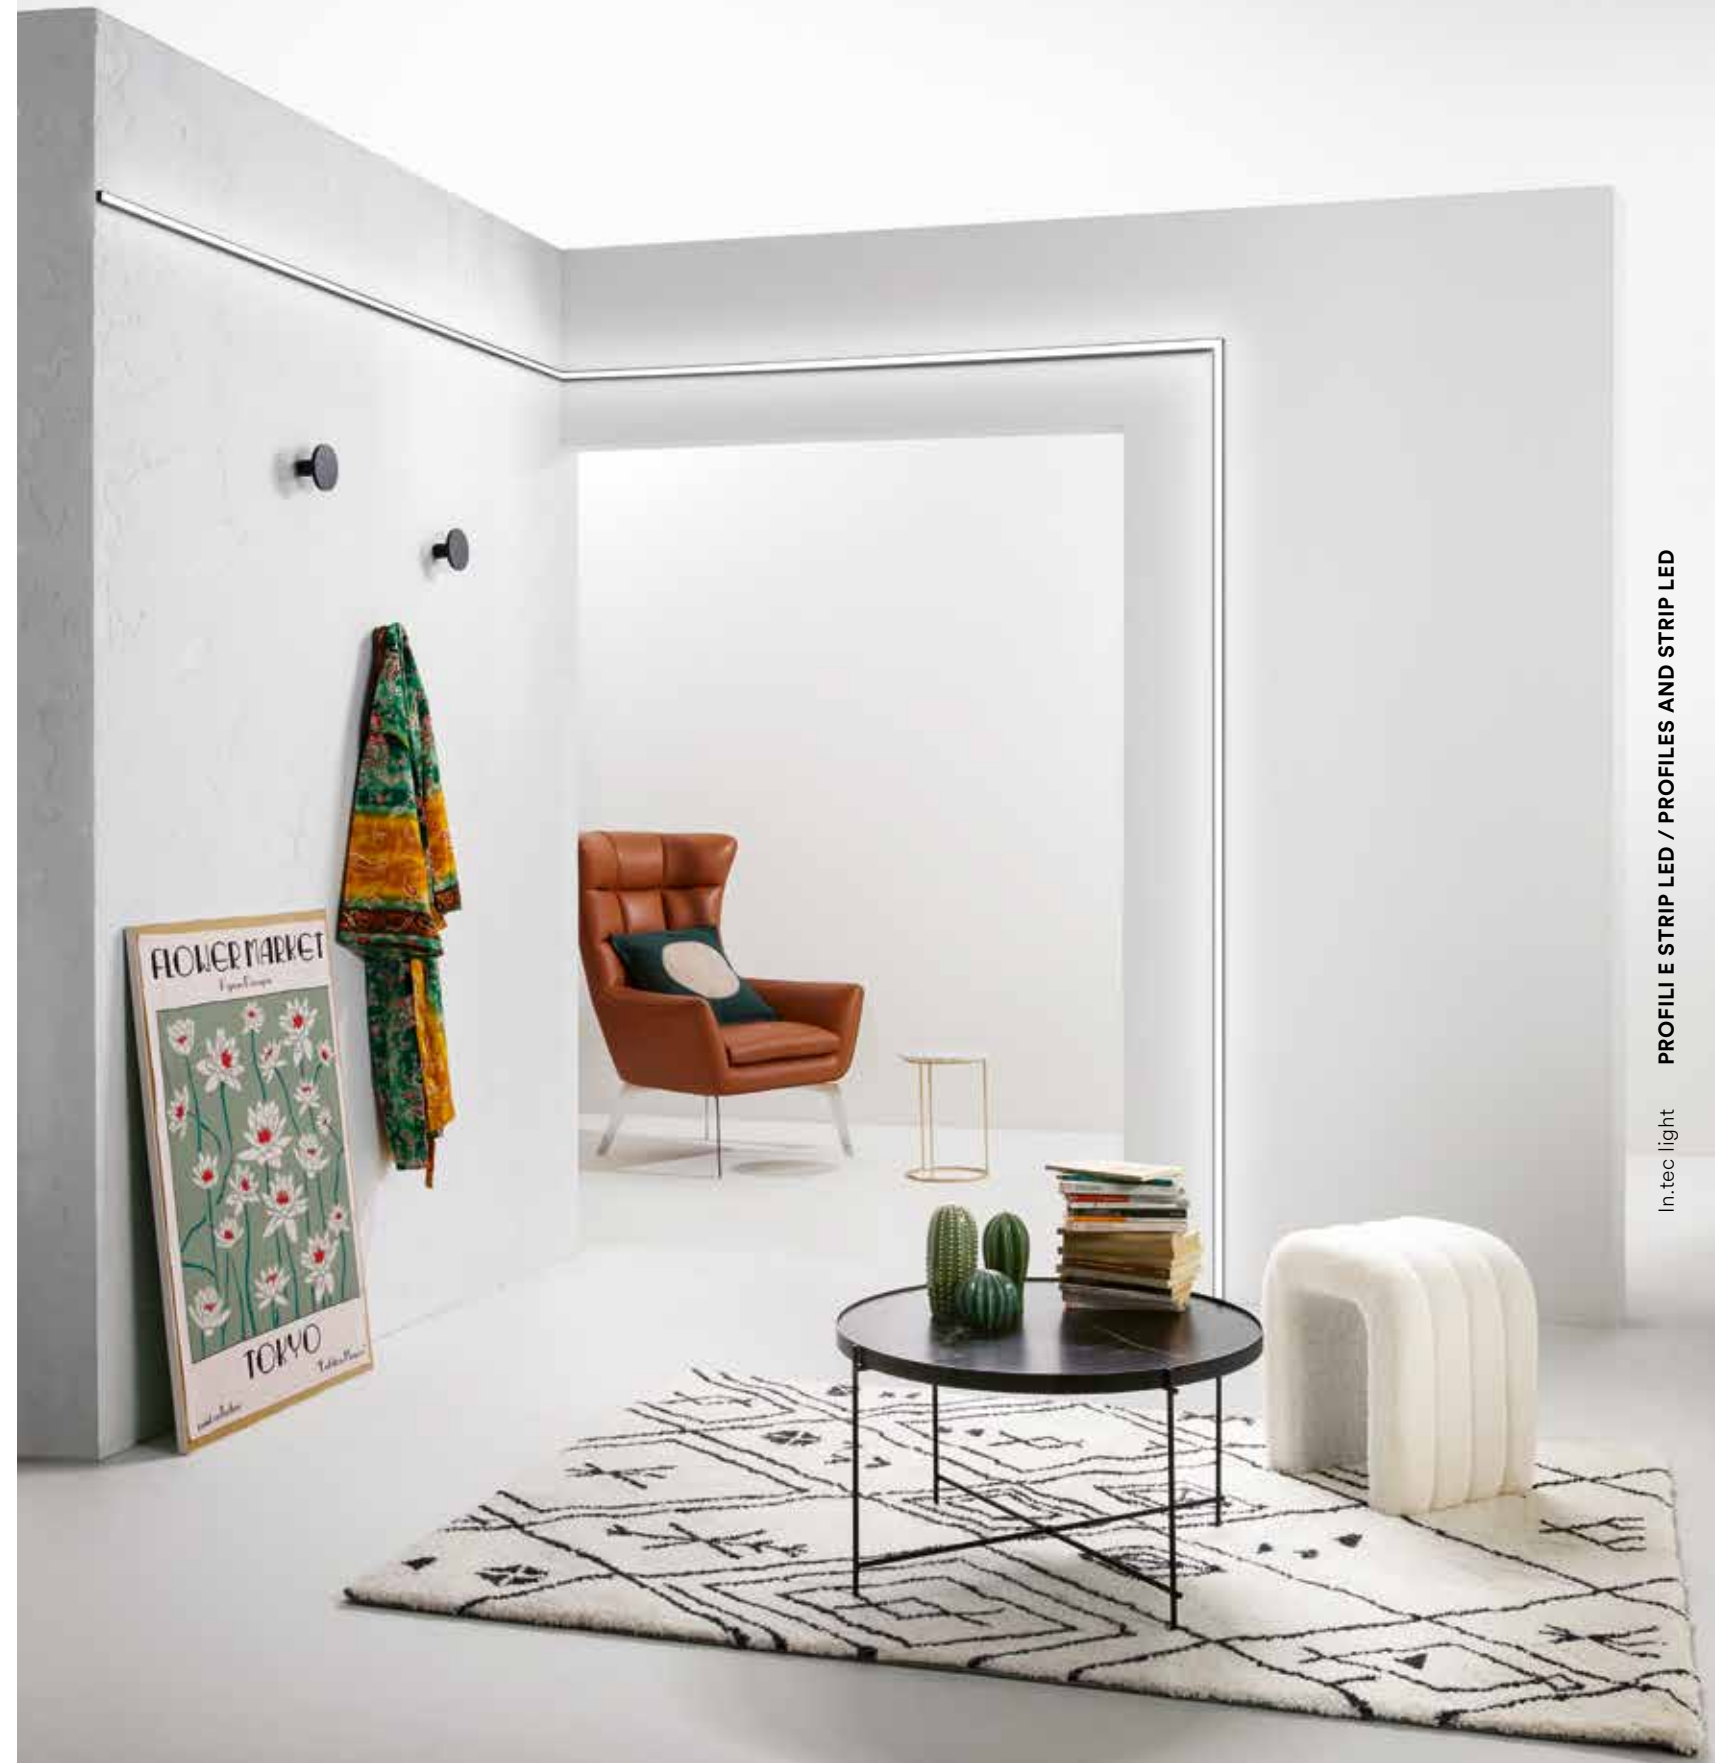

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione a superficie /  
Surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

MILANO

# MILANO PROFILE


Profilo con diffusore opale,  
tappi e staffette inclusi /  
Profile with opal diffuser  
caps and brackets included.



length | colour

<b>I-PROFILO-MILANO</b> 8031434611854	1 m	aluminum
<b>I-PROFILO-MILANO-2</b> 8031440359412	2 m	aluminum
<b>I-PROFILO-MILANO-2 BCO</b> 8031414871100	2 m	white


Accessori / Accessories		colour
	2 m PC trasparent diffuser <b>I-PROF-MILANO2-DIFF</b> 8031440357654	transparent
	2 pcs kit caps <b>I-PROFILO-MILANO-CAP</b> 8031414890538	silver
	<b>I-PROFILO-MILANO-BCO-CAP</b> 8031414890521	white



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione a superficie /  
Surface installation

# ULTRA PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

ULTRA

Profilo con diffusore opale,  
tappi e staffette inclusi /  
Profile with opal diffuser,  
caps and brackets included.



length  
2 m

colour  
aluminum

**I-PROFILO-ULTRA**  
8031414888788

2 m aluminum




Accessori / Accessories



2 pcs kit caps

**I-PROFILO-ULTRA-CAP**  
8031414890255


colour  
silver

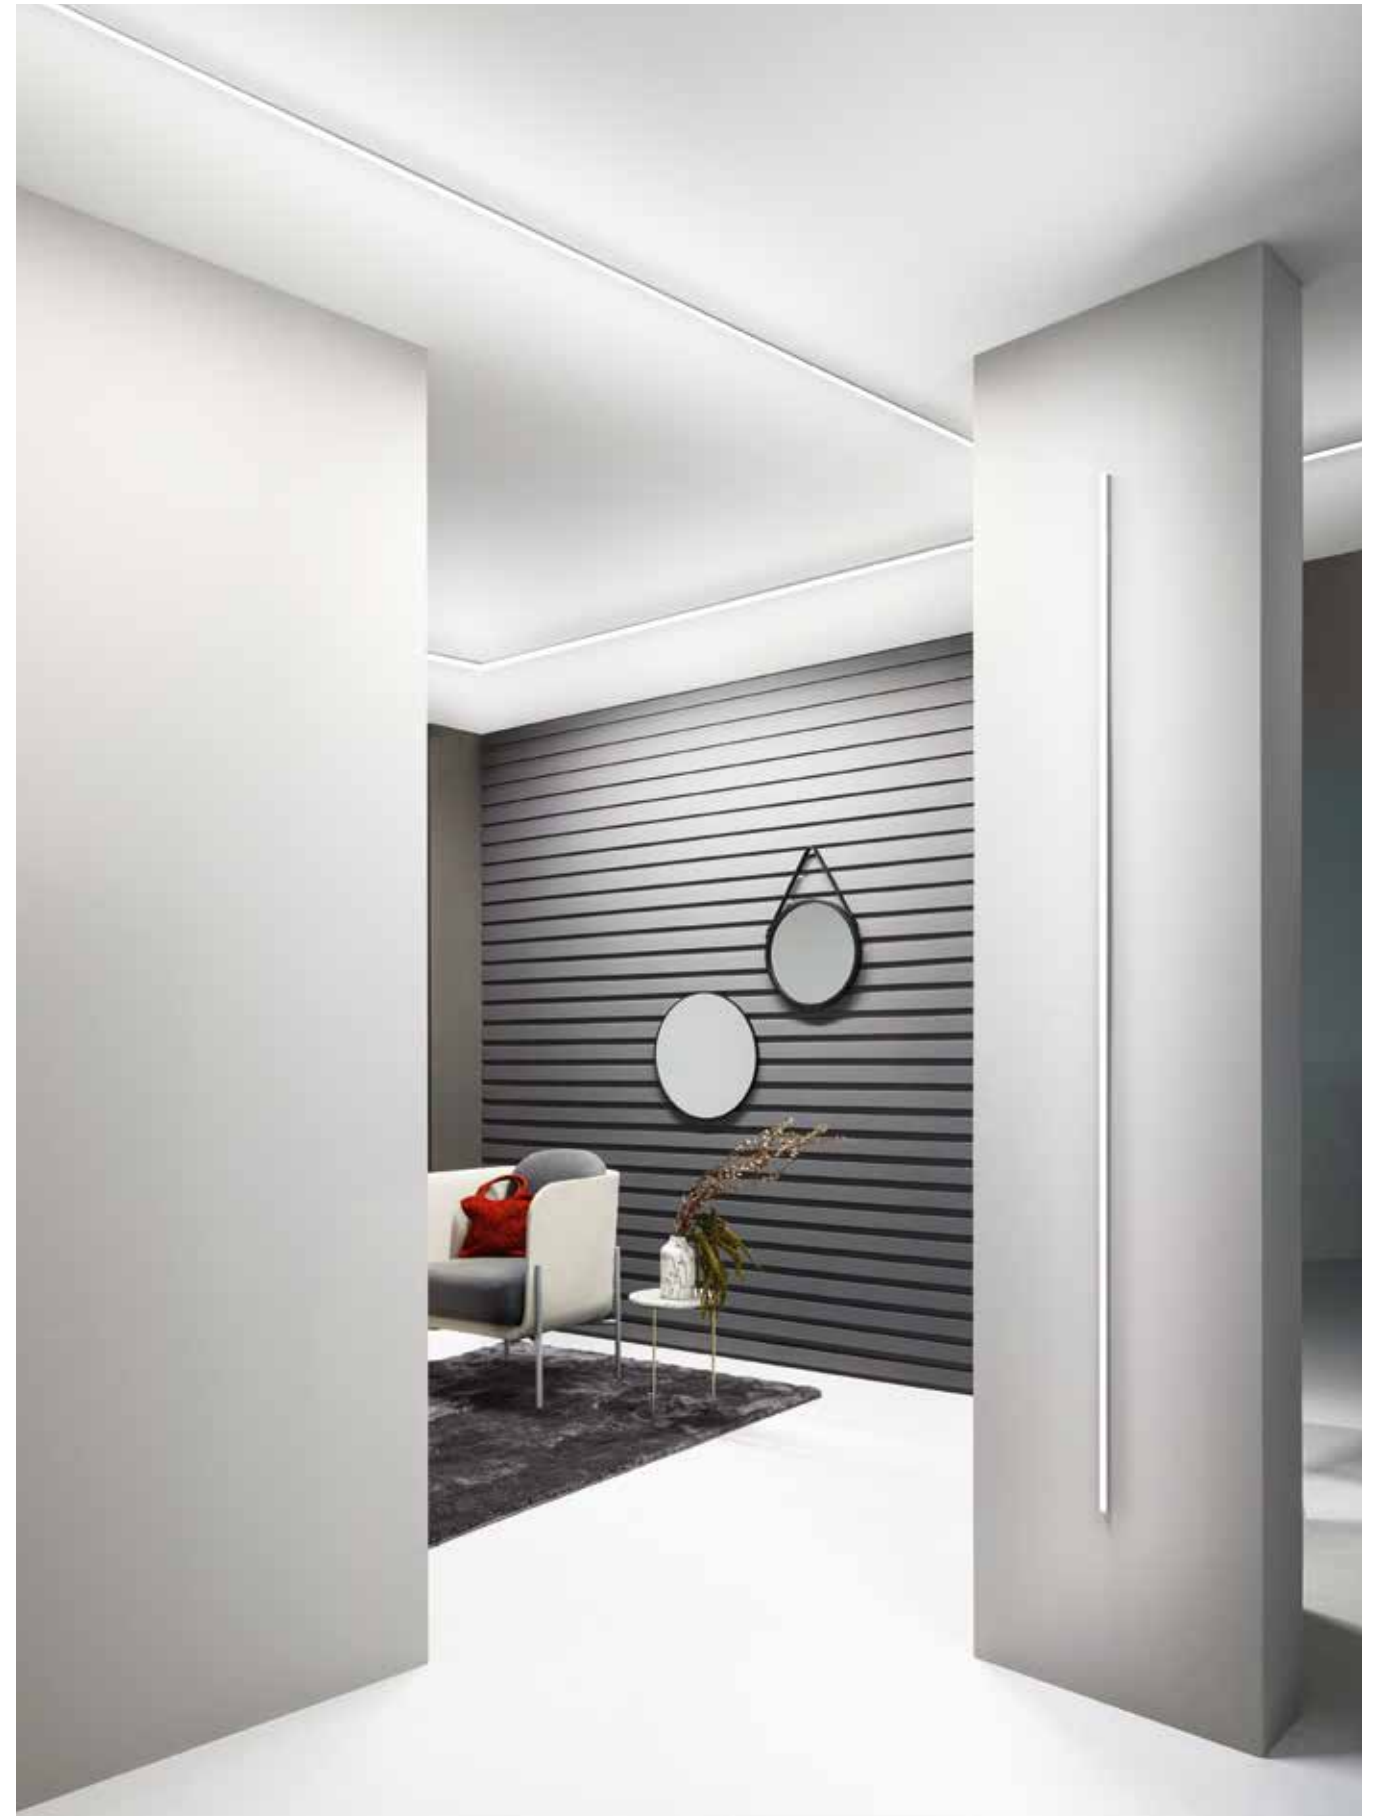

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione a superficie /  
Surface installation

# CAMELOT PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

CAMELOT

Profilo flessibile con diffusore  
opale, tappi e staffette inclusi /  
Flexible profile with opal diffuser,  
caps and brackets included.



length | colour

**I-PROFILO-CAMELOT**  
8031414871087

2 m | aluminum



Accessori / Accessories

2 pcs kit caps



**I-PROFILO-CAMELOT-CAP**  
8031414890477

colour | silver




In.tec light | PROFILE STRIP LED / PROFILES AND STRIP LED



Installazione a superficie /  
Surface installation

# TUBE PROFILE




Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

TUBE

Profilo in alluminio per installazione  
a muro/soffitto o sospensione, diffusore  
a emissione a 180°, tappi e staffe inclusi /  
Aluminum profile for installation wall/ceiling  
or suspension, 180° emission diffuser,  
caps and brackets included.



length | colour



**I-PROFILO-TUBE-2**  
8031414881925

2 m | ● | aluminum

Installazione a plafoniera /  
Ceiling installation



Installazione a sospensione /  
Suspended installation

Accessori / Accessories



2 pcs kit caps

**I-PROFILO-TUBE-CAP**  
8031414881932

colour



● | white



Kit suspension mounting system 2,5 m


**I-PROFILO-TUBE-SOSP**  
8031414882243

● | silver



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione angolare a superficie /  
Angular surface installation




Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

NEWYORK

# NEWYORK PROFILE

Profilo angolare a rapido fissaggio  
nel cartongesso, diffusore opale,  
tappi e staffe inclusi /  
Quick-fixing angle profile in plasterboard,  
opal diffuser, caps and brackets included.

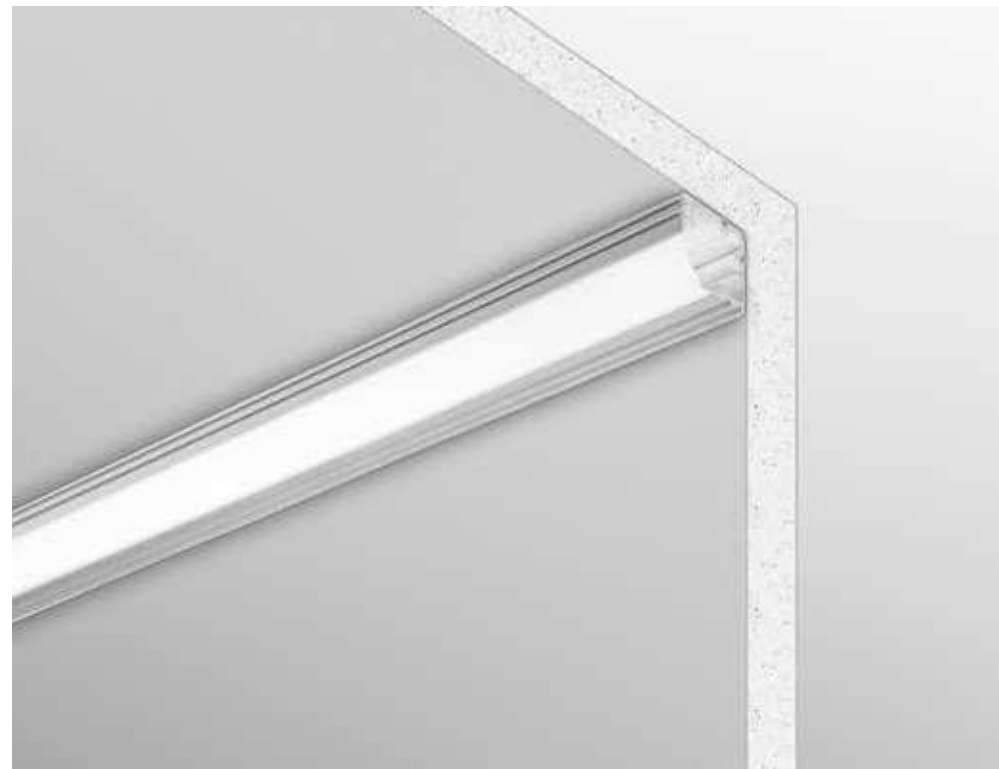

length colour

Accessori / Accessories

colour

**I-PROFILO-NEWYORK**  
8031434581218

1 m aluminum

**I-PROFILO-NEWYORK-2**  
8031440359382

2 m aluminum



2 m PC trasparent diffuser

**I-PROF-NEWYORK2-DIFF**  
8031440357623



trasparente



2 pcs kit caps

**I-PROFILO-NEWYORK-CAP**  
8031414890545

silver



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione angolare a superficie /  
Angular surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

# DORIK PROFILE

Profilo angolare in alluminio  
con fissaggio a parete, diffusore  
opale, tappi e staffe inclusi /  
Angular aluminium profile with  
wall mounting, opal diffuser,  
caps and brackets included.



length colour

length colour

Accessori / Accessories

colour

2 pcs kit caps for DORIK 16x16 mm



**I-PROFILO-DORIK-16-CAP**  
8031414882212

●  
silver

2 pcs kit caps for DORIK 29,7x29,7 mm



**I-PROFILO-DORIK-CAP**  
8031414877768





●  
silver

**I-PROFILO-DORIK-16-2**  
8031414882205

●  
2 m aluminum

**I-PROFILO-DORIK-2**  
8031414876556

●  
2 m aluminum



Installazione angolare a superficie /  
Angular surface installation



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

# IONIK PROFILE

Profilo angolare in alluminio  
con fissaggio a parete, diffusore  
opale, tappi e staffe inclusi /  
Angular aluminium profile with  
wall mounting, opal diffuser,  
caps and brackets included.



length colour

length colour

Accessori / Accessories

colour

2 pcs kit caps for IONIK 16x16 mm



**I-PROFILO-IONIK-16-CAP**  
8031414882236

●  
silver

2 pcs kit caps for IONIK 29,7x29,7 mm



**I-PROFILO-IONIK-CAP**  
8031414877775





●  
silver

**I-PROFILO-IONIK-16-2**  
8031414882229

●  
2 m aluminum

**I-PROFILO-IONIK-2**  
8031414876549

●  
2 m aluminum



PROFILE STRIP LED / PROFILES AND STRIP LED

In.tec light

Installazione calpestabile a superficie /  
Walkable surface installation

# STEPWAY PROFILE

Profilo per gradini,  
diffusore opale e tappi inclusi /  
Step profile, opal diffuser  
and caps included.






length  
2 m  
colour  
aluminum

**I-PROFILO-STEPWAY**  
8031414876594

Accessori / Accessories  
2 pcs kit caps  
colour  
silver

**I-PROFILO-STEPWAY-CAP**  
8031414877782



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



STEPWAY



In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione calpestabile ad incasso /  
Walkable recessed installation

# DRIVEWAY PROFILE




Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



DRIVEWAY

Profilo in alluminio a incasso carrabile,  
tappi e staffe inclusi /  
Driveway recessed aluminum profile,  
caps and brackets included.

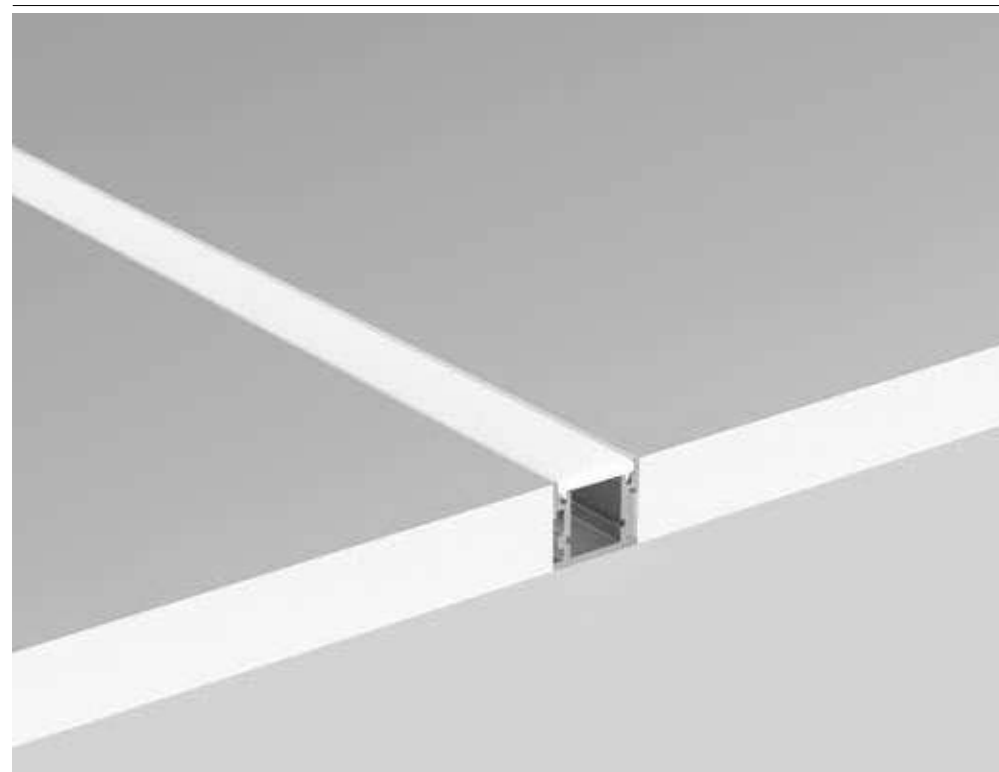

length  
2 m

colour  
aluminum

**I-PROFILO-DRIVEWAY-2**  
8031414881949

pressure loads  
max 2000 kg

2 m aluminum


Accessori / Accessories

2 pcs kit caps



**I-PROFILO-DRIVEWAY-CAP**  
8031414881956

colour  
silver



In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED



## Profiles for veil installation

I profili per installazione a veletta sono progettati per consentire l'integrazione dell'illuminazione a LED nei soffitti e per distribuire uniformemente la luce nei vari ambienti, creando un'illuminazione diffusa. Questi profili permettono inoltre di nascondere le sorgenti luminose e i cablaggi, contribuendo a un aspetto estetico più pulito e moderno.

Veil installation profiles are designed to allow LED lighting to be integrated into ceilings and to evenly distribute light in different rooms, creating diffuse lighting. These profiles also allow light sources and wiring to be hidden, contributing to a cleaner, more modern aesthetic appearance.



Installazione a veletta /  
Veil installation

# GASH PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



GASH

Profilo a veletta bianco,  
diffusore opale e tappi inclusi /  
White veil profile, opal  
diffuser and caps included.



length | colour  
2 m | aluminum

**I-PROFILO-GASH**  
8031414890262

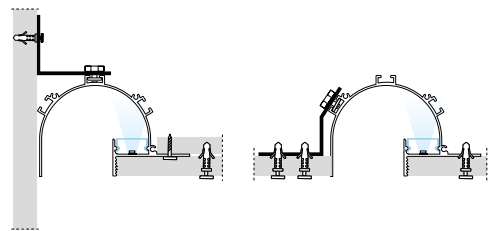

Applicazione con staffe I-PROFILO-GASH-STL /  
Installation by brackets I-PROFILO-GASH-STL



Applicazione con staffe I-PROFILO-GASH-STZ /  
Installation by brackets I-PROFILO-GASH-STZ



Accessori / Accessories



2 pcs kit caps

**I-PROFILO-GASH-CAP**  
8031414890279

colour  
white



2 pcs kit brackets with included screws


**I-PROFILO-GASH-STL**  
8031414889990

aluminum



**I-PROFILO-GASH-STZ**  
8031414890286


aluminum

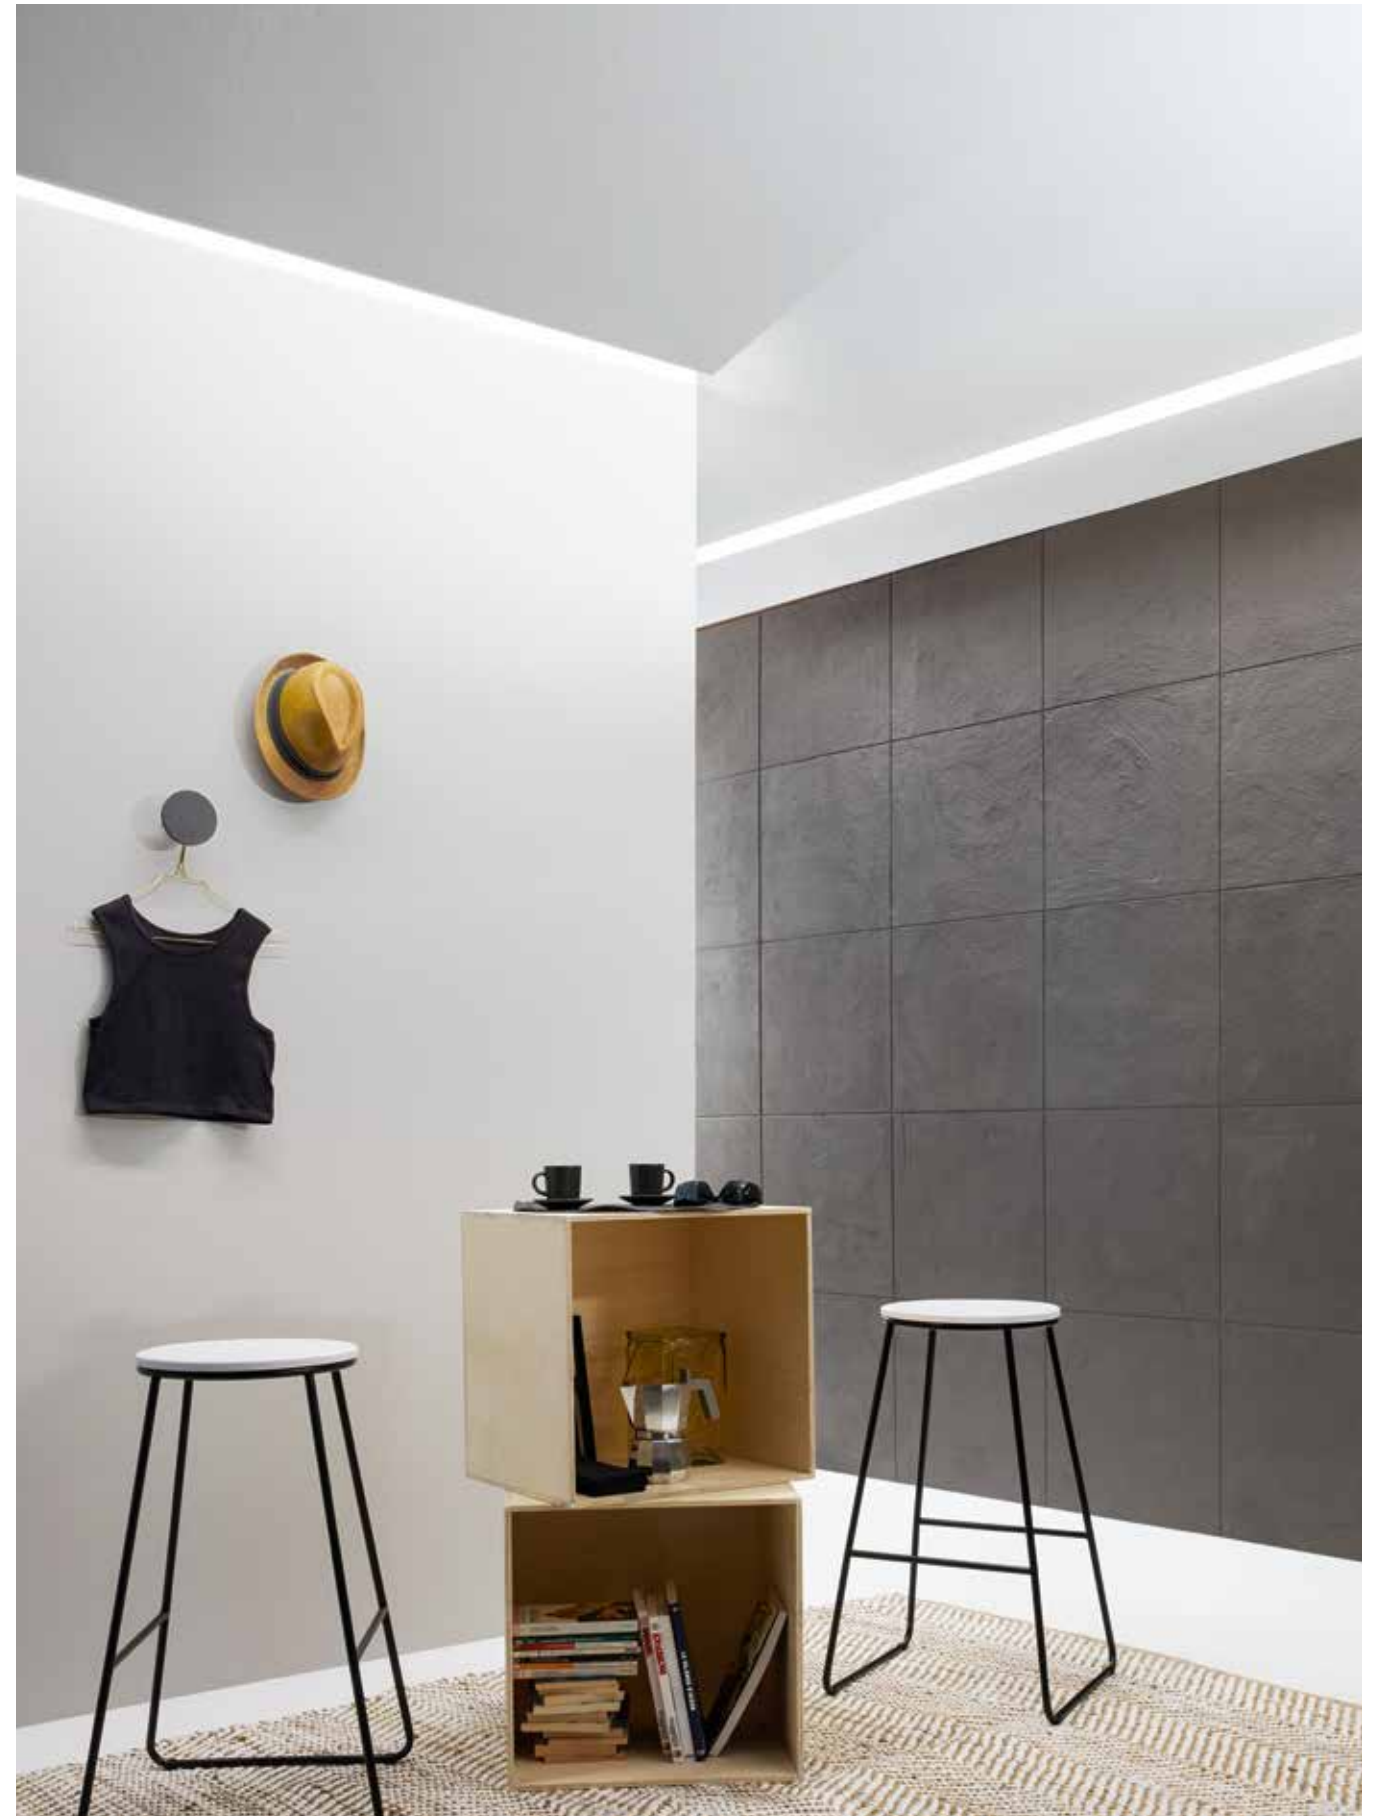

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED


Installazione a veletta /  
Veil installation

# TRIM PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

Profilo a veletta, diffusore  
opale e tappi inclusi /  
Veil profile, opal diffuser  
and caps included.

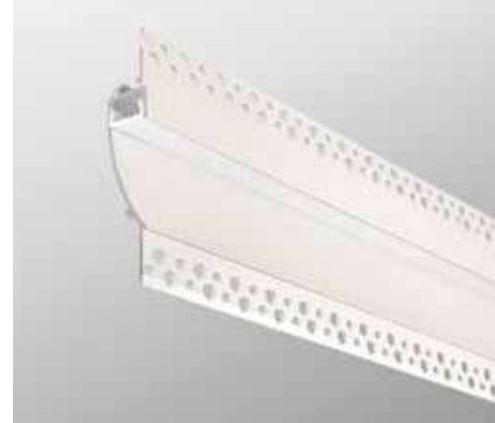

length  
2 m

colour  
white

**I-PROFILO-TRIM-2**  
8031414876563


Accessori / Accessories

2 pcs kit caps




**I-PROFILO-TRIM-CAP**  
8031414890583

colour  
white

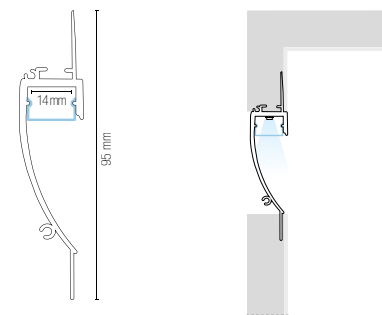

Installazione a veletta /  
Veil installation

# MOP PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

Profilo a veletta, diffusore  
opale e tappi inclusi /  
Veil profile, opal diffuser  
and caps included.



length  
2 m

colour  
white

**I-PROFILO-MOP**  
8031414890019


Accessori / Accessories

2 pcs kit caps



**I-PROFILO-MOP-CAP**  
8031414888733

colour  
white




In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED



Installazione a veletta /  
Veil installation

# VEIL PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



length  
2 m | colour  
white

**I-PROFILO-VEIL-2**  
8031414881901

2 m | white


Accessori / Accessories

2 pcs kit caps



**I-PROFILO-VEIL-CAP**  
8031414881918

colour  
white



Installazione a veletta /  
Veil installation

# WING PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



length  
2 m | colour  
white

**I-PROFILO-WING**  
8031414915804

2 m | white


Accessori / Accessories

2 pcs kit caps



**I-PROFILO-WING-CAP**  
8031414923564


colour  
white

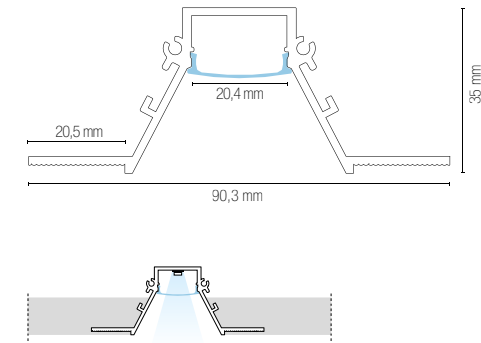

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

Installazione a veletta /  
Veil installation

# DUAL PROFILE



Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435

DUAL

Profilo in alluminio a doppia emissione,  
tappi e staffe inclusi /  
Double-emitting aluminum profile,  
caps and brackets included.



length | colour

**I-PROFILO-DUAL-2-BCO**  
8031414881864

2 m | white

**I-PROFILO-DUAL-2-NER**  
8031414881888

2 m | black

Accessori / Accessories



2 pcs kit caps


**I-PROFILO-DUAL-BCO-CAP**  
8031414881871

white



**I-PROFILO-DUAL-NER-CAP**  
8031414881895

black



PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light



## Paintable gypsum profile, recessed and surface installation


**I profili in gesso verniciabile, progettati per un'installazione a incasso e/o superficie, sono disponibili in varianti lineari e decorative. Adatti all'utilizzo su cartongesso e muratura, offrono una solida versatilità e garantiscono un risultato tecnico ed estetico di alto livello per una vasta gamma di progetti illuminotecnici.**

Paintable gypsum profiles, designed for recessed and/or surface installation, are available in linear and decorative variants. Suitable for use on plasterboard and masonry, they offer solid versatility and ensure a high level of technical and aesthetic result for a wide range of lighting projects.



Installazione su cartongesso /  
Installation on plasterboard

# INVISILINE PROFILE




Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



INVISILINE

Lastra in cartongesso con profilo in alluminio integrato /  
Plasterboard slab with integrated aluminum profile

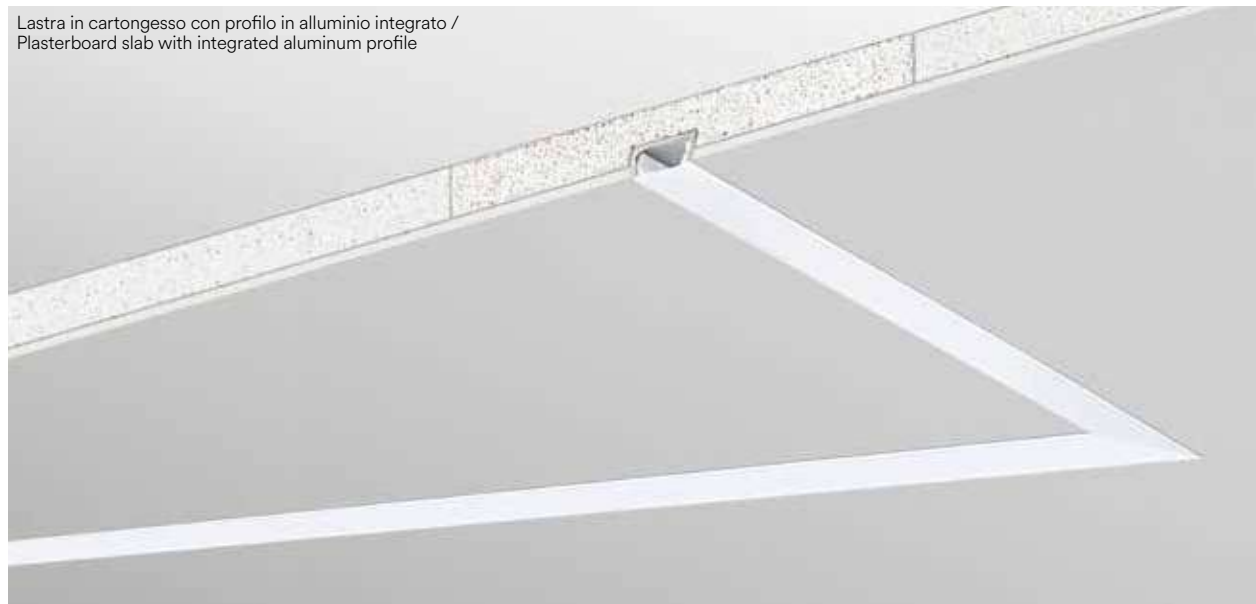

length  
2000 mm





length  
2000 mm

**I-INVISILINE-2**  
8031414916221

2 m

**I-INVISILINE-L**  
8031414916238

2 m

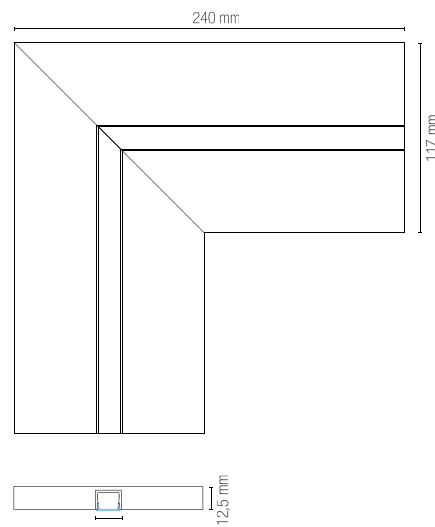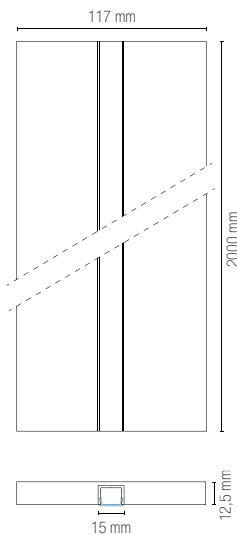

PROFILI E STRIP LED / PROFILES AND STRIP LED

in.tec.light

# PROFY BIS PROFILE




Profilo a veletta,  
diffusore opale e  
tappi inclusi /  
Veil profile, opal diffuser  
and caps included.



**I-PROFY-BIS**  
8031414882359

Profilo in gesso per led  
biemissione, incluso anima  
alluminio e diffusori in PC /  
Gypsum profile for led  
double emission including  
PC cover and aluminum

Diffusori in PC / PC-diffuser  
1000 x 61 x 41 mm

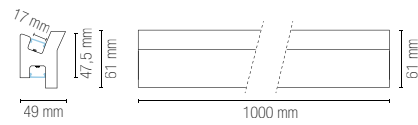

# PROFY MONO PROFILE




Profilo a veletta,  
diffusore opale e  
tappi inclusi /  
Veil profile, opal diffuser  
and caps included.



**I-PROFY-MONO**  
8031414882366

Profilo in gesso per led  
singola emissione, angolo 90°  
anima alluminio e diffusori in PC /  
Gypsum profile for LED single  
emission including PC cover  
and aluminum

Diffusori in PC / PC-diffuser  
1000 x 61 x 41 mm

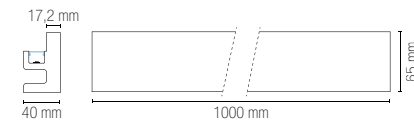

Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



Profili in gesso verniciabile /  
Paintable gypsum profiles

## PROFY GIMEL PROFILE




Profilo a veletta,  
diffusore opale e  
tappi inclusi /  
Veil profile, opal diffuser  
and caps included.



**I-PROFY-GIMEL**  
8031414882410

Profilo in gesso per led singola  
emissione, anima alluminio  
e diffusore in PC /  
Gypsum profile for led  
single emission including  
PC cover and aluminum

Diffusori in PC / PC-diffuser  
1000 x 61 x 41 mm

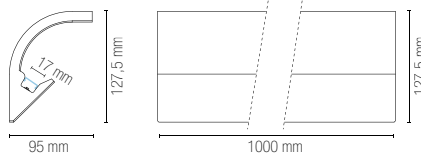

## PROFY VELA PROFILE




Profilo a veletta,  
diffusore opale e  
tappi inclusi /  
Veil profile, opal diffuser  
and caps included.



**I-PROFY-VELA**  
8031414882373

Profilo in gesso per led singola  
emissione, anima alluminio  
e diffusore in PC /  
Gypsum profile for led  
single emission including  
PC cover and aluminum


Diffusori in PC / PC-diffuser  
1000 x 61 x 41 mm

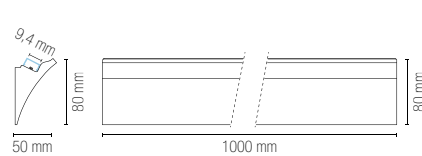

Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



**PROFY GIMEL e PROFY VELA**

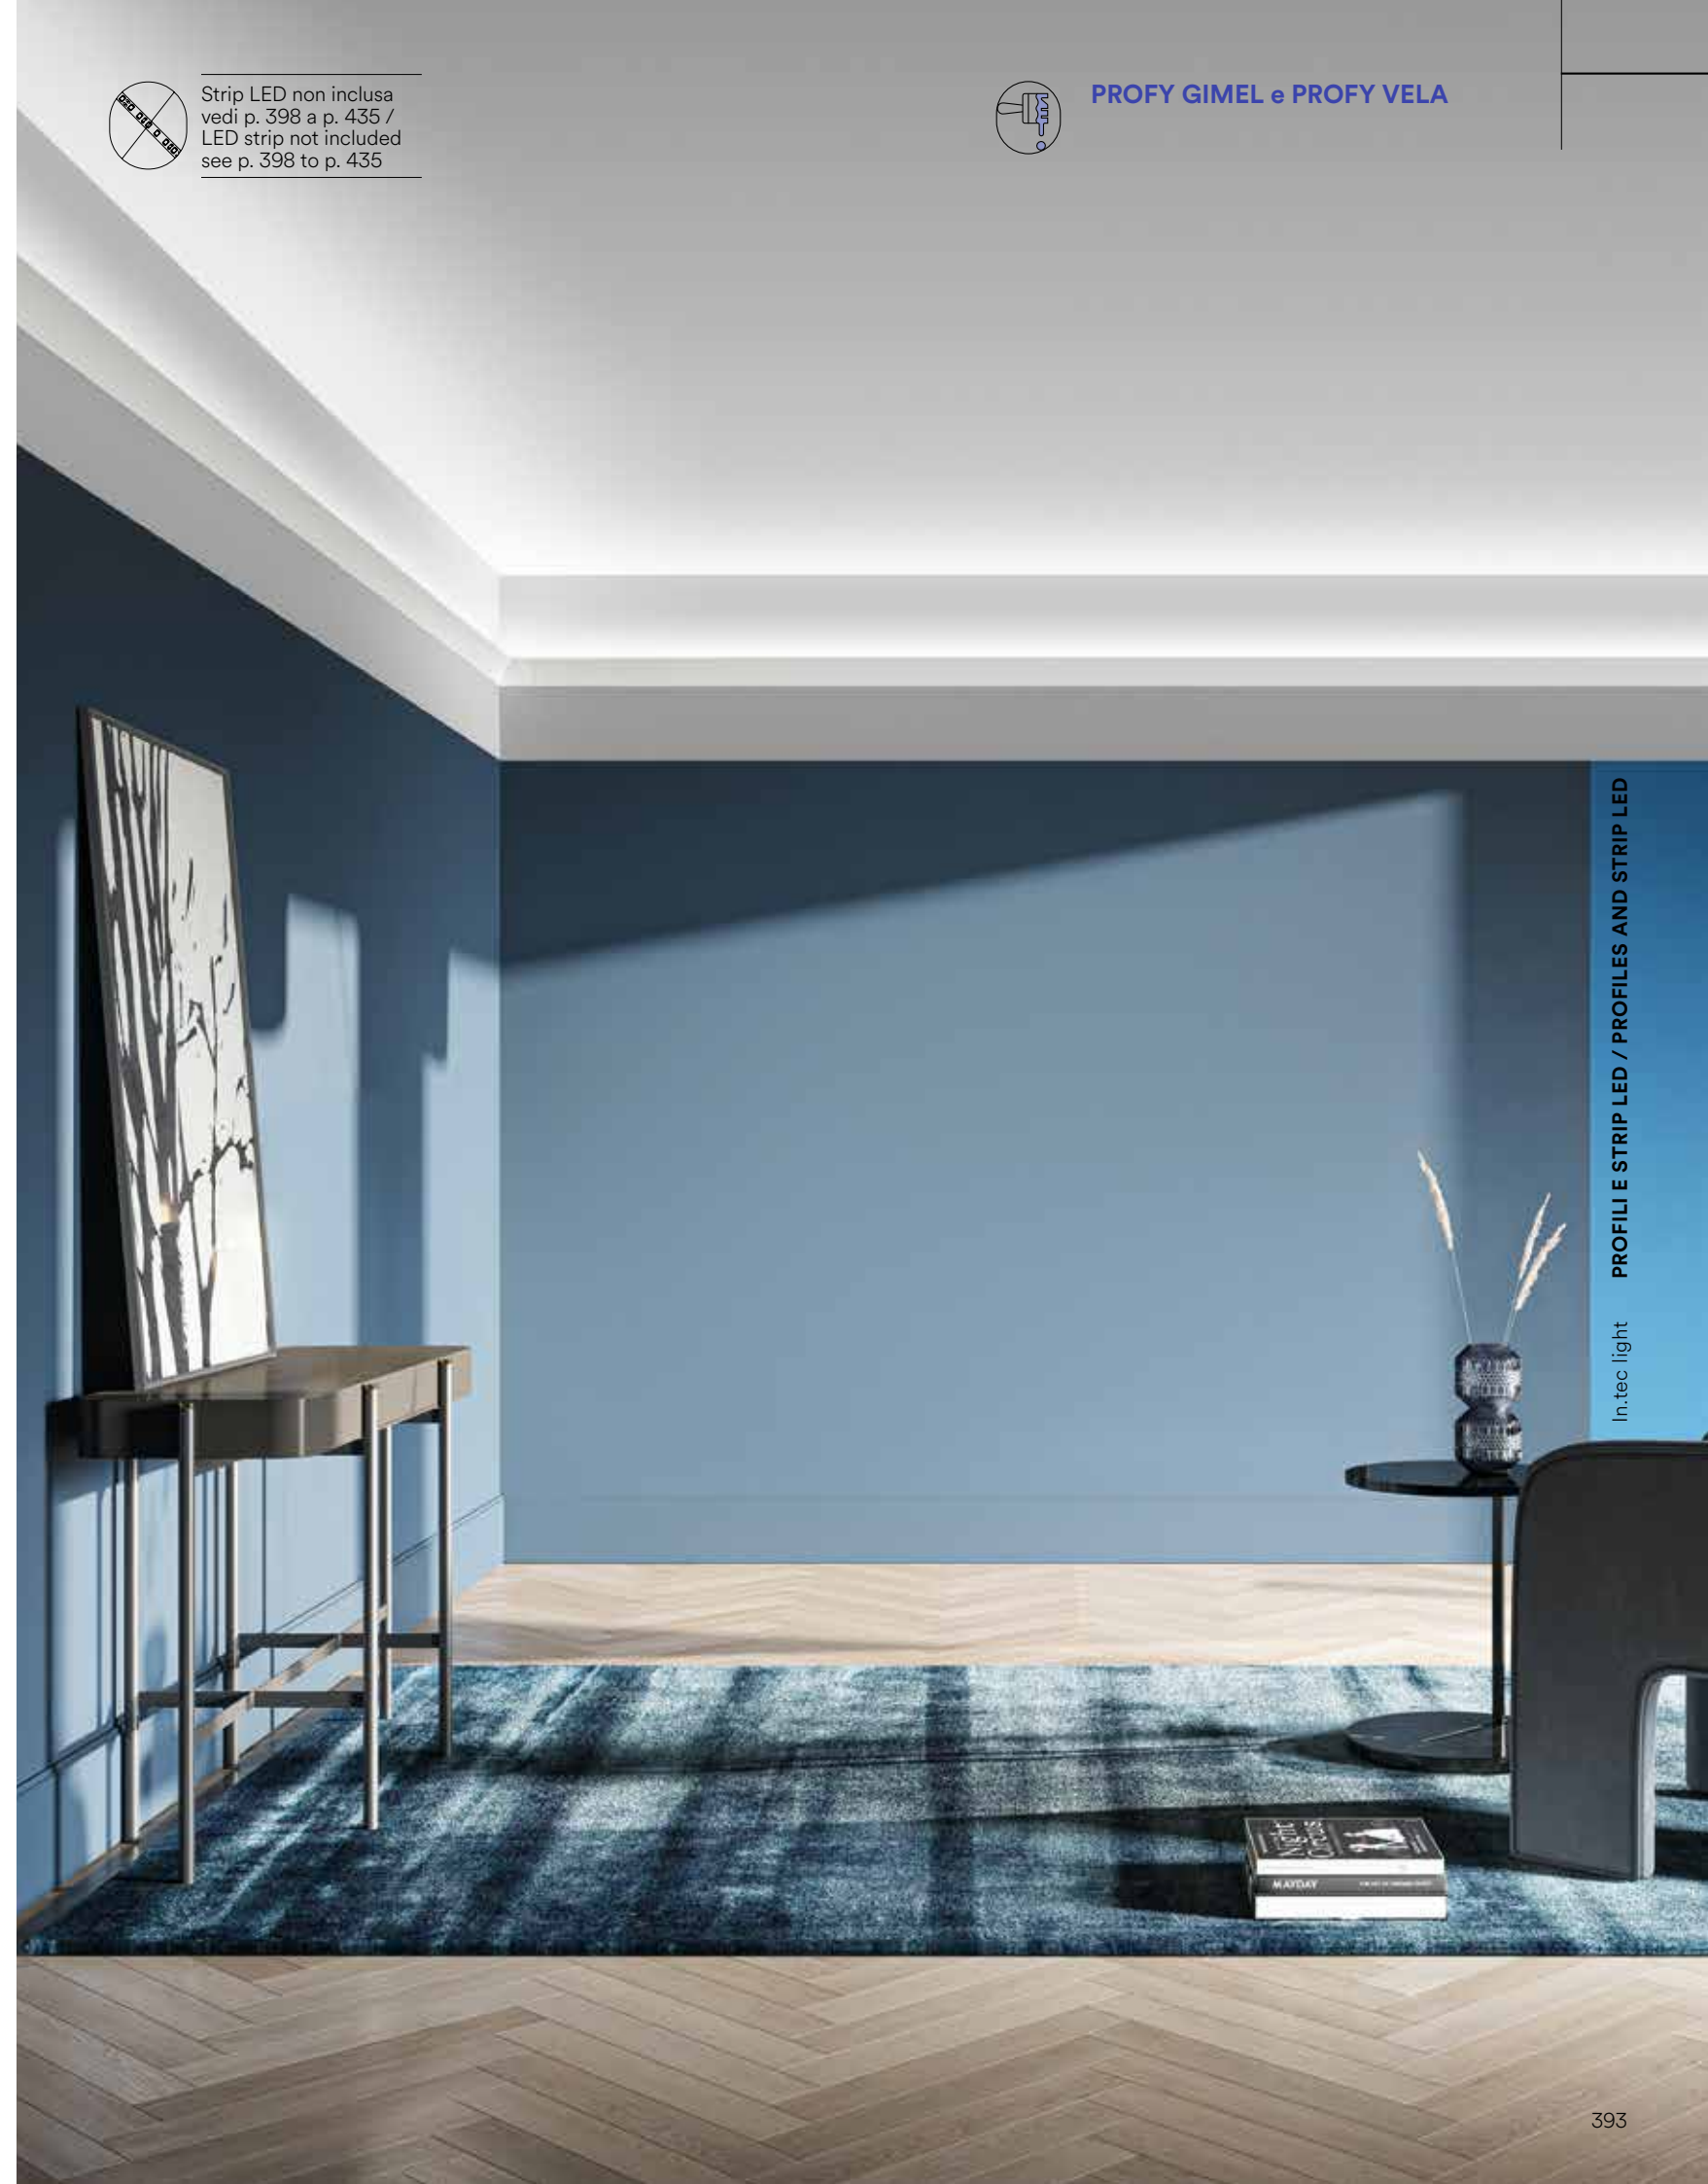


PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light




Installazione a superficie /  
Surface installation

# PIANO PROFILE

 Strip LED non inclusa  
vedi p. 398 a p. 435 /  
LED strip not included  
see p. 398 to p. 435



Profilo base per disposizione strip /  
Profile dissipation base.

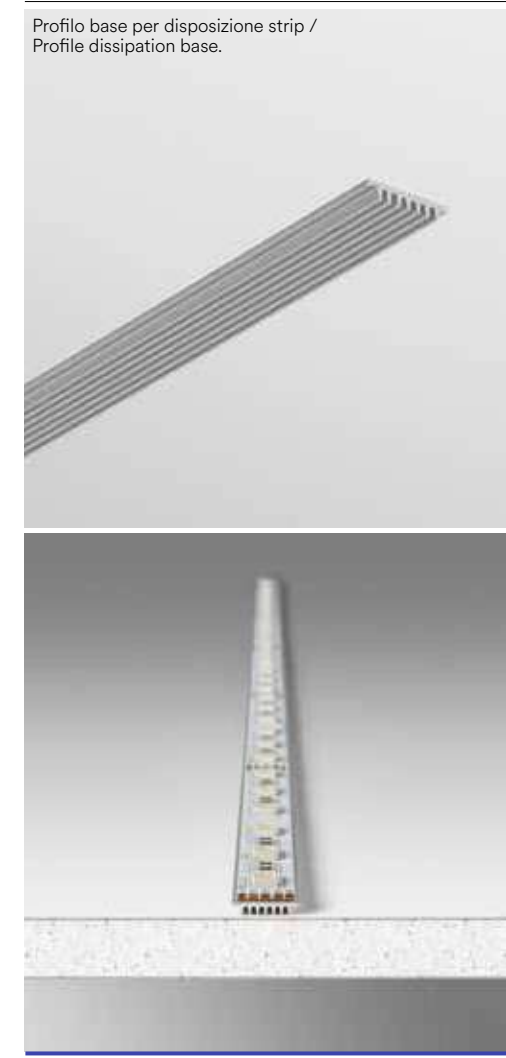

length | colour  
|-----|

**I-PROFILO-PIANO-2**  
8031414878802

2 m aluminum




In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

	<p><b>STRIP-HANDESENSOR-W</b> 8031414879335</p> <p>Scheda rilevatore movimento mano per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max</p>	<p>Hand motion card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max</p>	
<p><b>Funzioni sensore interruttore</b> Raggio di rilevamento 5-15 cm</p>	<p><b>Motion sensor switch</b> Detection range 5-15 cm</p>		
	<p><b>STRIP-PIRENSOR</b> 8031414879373</p> <p>Scheda sensore movimento pir per strip Input DC12V-24V output DC12V-24V 60/120W 5A max</p>	<p>Pir motion sensor card for strip DC12V-24V output DC12V-24V 60/120W 5A max</p>	
<p><b>Funzioni sensore movimento</b></p>	<p><b>Motion sensor function</b></p>		
	<p><b>STRIP-TOUCH-W</b> 8031414879359</p> <p>Scheda pulsante touch per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max</p>	<p>Touch button card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max</p>	
<p><b>Funzioni sensore touch</b> Passando sul sensore entro i 0,5 secondi si attiva la funzione ON/OFF</p>	<p><b>Touch sensor function</b> When touching the sensor within 0,5 second the switch status changes ON/OFF</p>		
<p>Restando sul sensore oltre i 0,5 secondi si attiva la funzione di regolazione di intensità luminosa (massima - minima - massima)</p>	<p>When touching the sensor for over 0,5 second the switch turn to adjustment status (high - low - high)</p>		
	<p><b>I-PROFILO-INC-STAFFE</b> 8031414890002</p> <p>Molla per incasso adatto per profili MILANO/ROMA/BERLINO, kit 2 pz</p>	<p>Metal spring for profile MILANO/ROMA/BERLINO, 2pcs kit</p>	

	<p><b>STRIP24V-8-CONN</b> 8031414925940</p> <p>Easy connector lineare luce continua per strip LED da 8mm</p>	<p>Linear easy connector continuous light for strip LED strip 8mm</p>
	<p><b>STRIP24V-8-NEST</b> 8031414925964</p> <p>Innesto elettrico easy connection luce continua per strip LED da 8mm</p>	<p>Easy connection electrical nest continuous light for LED strip 8mm</p>
	<p><b>STRIP24V-8-FLEX</b> 8031414925988</p> <p>Easy connector flessibile luce continua per strip LED da 8mm</p>	<p>Flexible easy connector continuous light for strip LED strip 8mm</p>
	<p><b>STRIP24V-10-CONN</b> 8031414925957</p> <p>Easy connector lineare luce continua per strip LED da 10mm</p>	<p>Linear easy connector continuous light for strip LED strip 10mm</p>
	<p><b>STRIP24V-10-NEST</b> 8031414925971</p> <p>Innesto elettrico easy connection luce continua per strip LED da 10mm</p>	<p>Easy connection electrical nest continuous light for LED strip 10mm</p>
	<p><b>STRIP24V-10-FLEX</b> 8031414925995</p> <p>Easy connector flessibile luce continua per strip LED da 10mm</p>	<p>Flexible easy connector continuous light for strip LED strip 10mm</p>
	<p><b>STRIP24V-8-L-CONN</b> 8031414926008</p> <p>Easy connector angolare luce continua per strip LED da 8mm</p>	<p>Easy connector angular continuous light for LED strip 8mm</p>
	<p><b>STRIP24V-10-L-CONN</b> 8031414926015</p> <p>Easy connector angolare luce continua per strip LED da 10mm</p>	<p>Easy connector angular continuous light for LED strip 10mm</p>



# STRIP24V COB DIGITAL

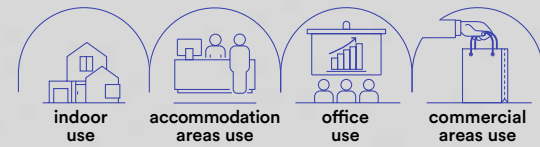

EASY DOMOTICA


**Rotolo 5 metri strip led digital. Protocollo WS2811.**  
Roll 5 meters digital strip-led. Protocollo WS2811.

CE   
Driver p. 843-852  
Controller p. 854-857


- Materiale**  
kapton  
senza silicone
- Temperatura colore**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
without silicone
- Colour temperature**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-COB-SPI-C</b> 8031414925513 lumen/m total lumen	 1020 lm 5100 lm
<b>STRIP24V-COB-SPI-M</b> 8031414925520 lumen/m total lumen	 1125 lm 5625 lm
<b>STRIP24V-COB-SPI-F</b> 8031414925537 lumen/m total lumen	 1095 lm 5475 lm
light source	COB
watt/m	15W


Fotometria del prodotto / Photometric curve

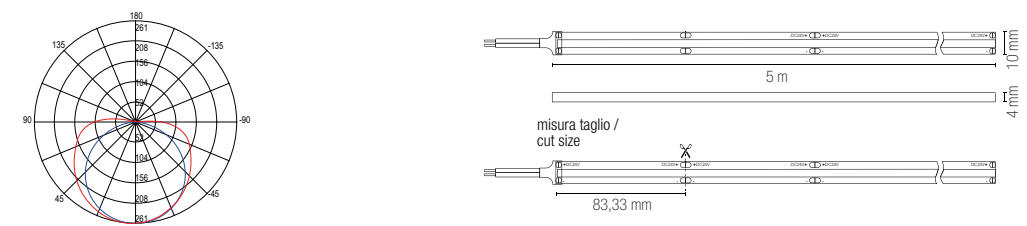

Recommended Profiles p. 336 to p. 397

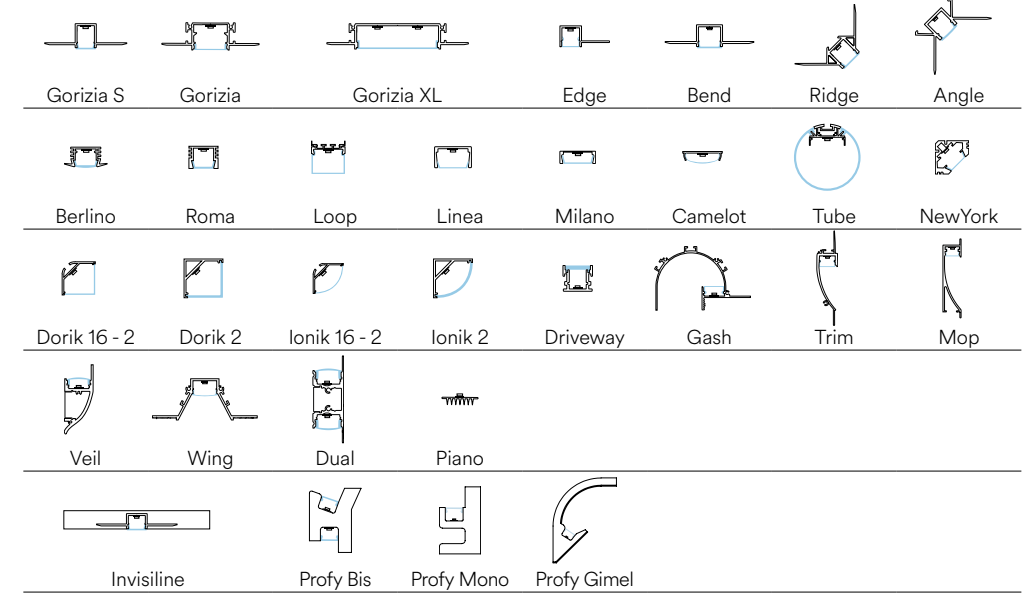

# STRIP24V COB RGB DIGITAL

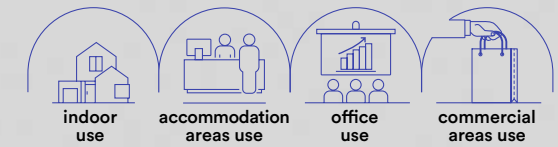

EASY DOMOTICA


**Rotolo 5 metri strip led digital. Protocollo WS2811.**  
Roll 5 meters digital strip-led. Protocollo WS2811.

CE   
Driver p. 843-852  
Controller p. 854-857


- Materiale**  
kapton  
senza silicone
- Temperatura colore**  
RGB
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
without silicone
- Colour temperature**  
RGB
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-COB-SPI-RGB</b> 8031414925544	 RGB
light source	COB 5050
watt/m	15W

Fotometria del prodotto / Photometric curve

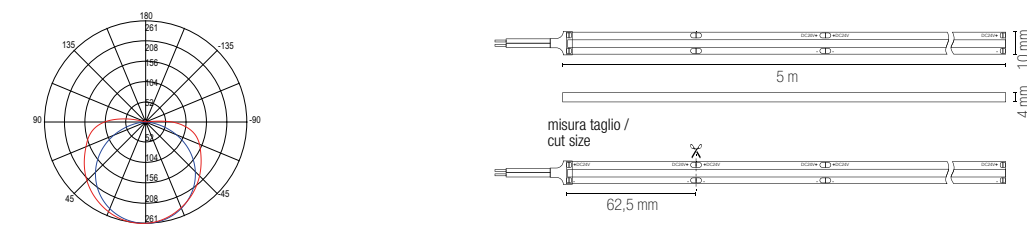

Recommended Profiles p. 336 to p. 397

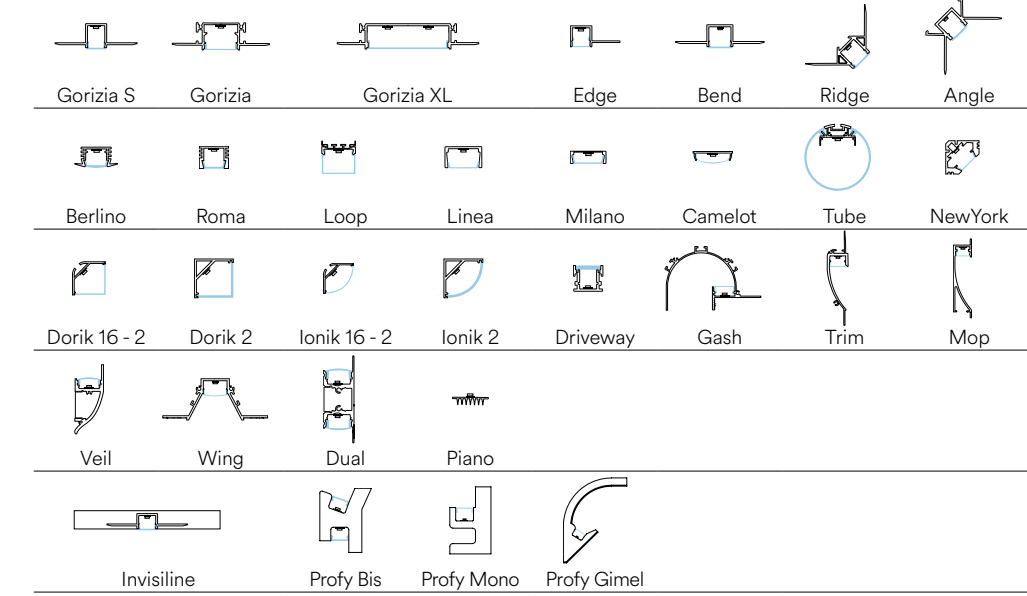

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

# STRIP24V 2835IP67 120



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.





Driver p. 843-852  
Controller p. 854-857




- Materiale**  
kapton con rivestimento in silicone
- Temperatura colore**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
tensione costante non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton with silicone cover
- Colour temperature**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
constant voltage not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835IP67-120C</b> 8031414925551	1800 lm 9000 lm
<b>STRIP24V-2835IP67-120M</b> 8031414925568	1980 lm 9900 lm
<b>STRIP24V-2835IP67-120F</b> 8031414925575	1890 lm 9450 lm
light source	SMD 2835
watt/m	18W
led/m	120


Fotometria del prodotto / Photometric curve

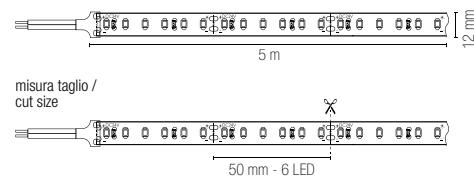

Recommended Profiles p. 336 to p. 397

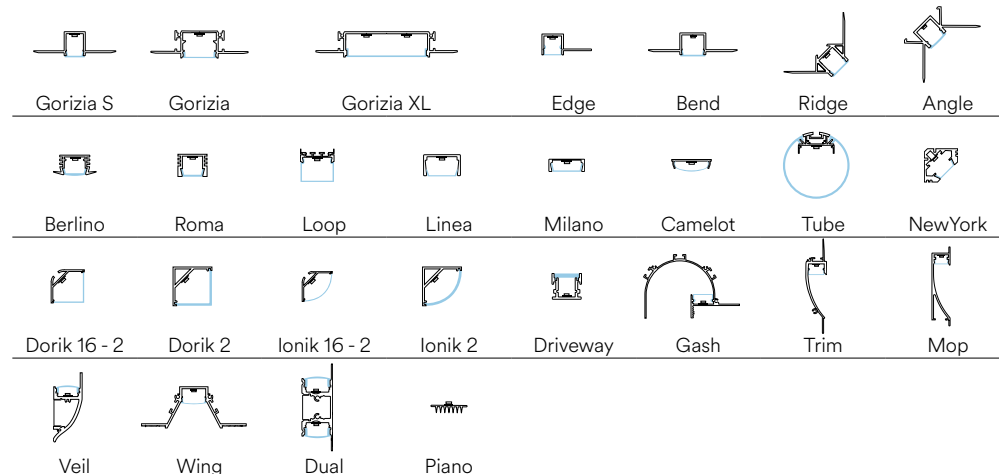

# STRIP24V 2835 5W



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.





Driver p. 843-852  
Controller p. 854-857




- Materiale**  
kapton senza silicone
- Temperatura colore**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
tensione costante non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton without silicone
- Colour temperature**  
3000K / 4000K / 6500K
- Driver**  
DC24V  
constant voltage not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835-5C</b> 8031414925582	475 lm 2375 lm
<b>STRIP24V-2835-5M</b> 8031414925599	500 lm 2500 lm
<b>STRIP24V-2835-5F</b> 8031414925605	490 lm 2450 lm
light source	SMD 2835
watt/m	5W
led/m	60


Fotometria del prodotto / Photometric curve

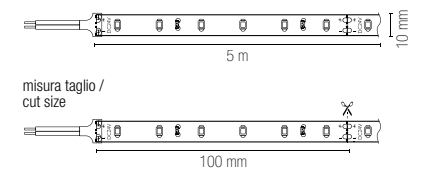

Recommended Profiles p. 336 to p. 397

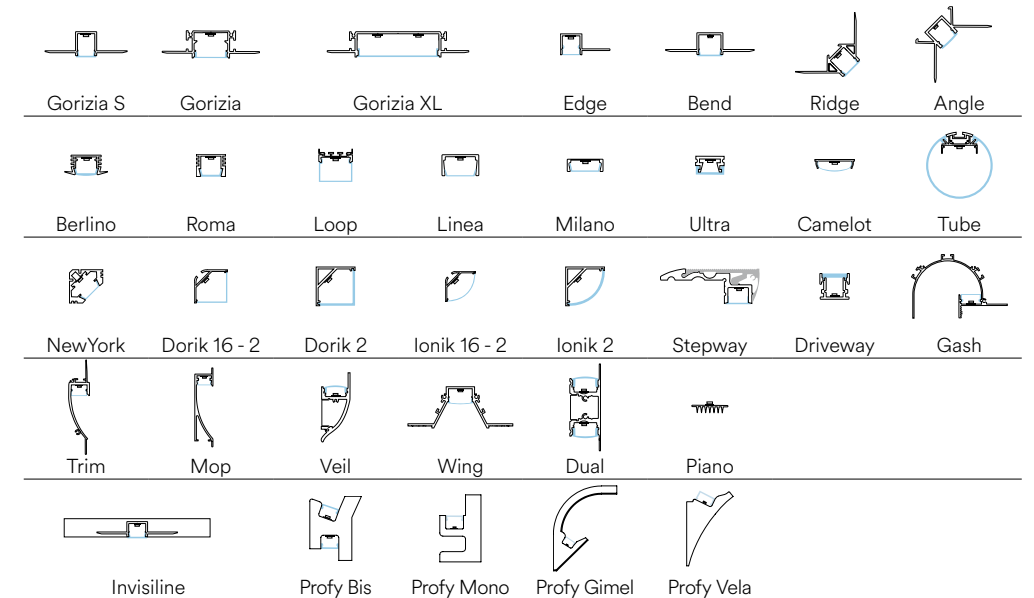

# STRIP24V R20 2835 120

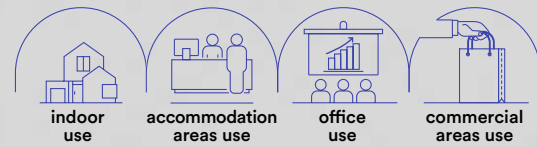

EASY DOMOTICA

Rotolo 20 metri strip led.  
Roll 20 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### Materiale

kapton  
senza silicone

### Temperatura colore

3000K / 4000K



### Driver

DC24V  
tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
without silicone

### Colour temperature

3000K / 4000K



### Driver

DC24V  
constant voltage  
not included

### Life time and on/off

50.000h  
>25.000 on/off

### STRIP24V-R20-2835-120C

8031414925612

lumen/m

1800 lm

### STRIP24V-R20-2835-120M

8031414925629

lumen/m



1980 lm

light source SMD 2835


watt/m 18W

led/m 120



### Fotometria del prodotto / Photometric curve

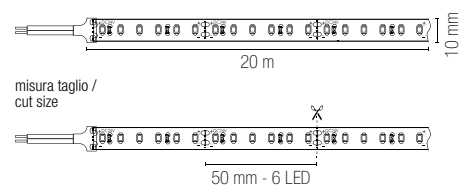

### Recommended Profiles p. 336 to p. 397

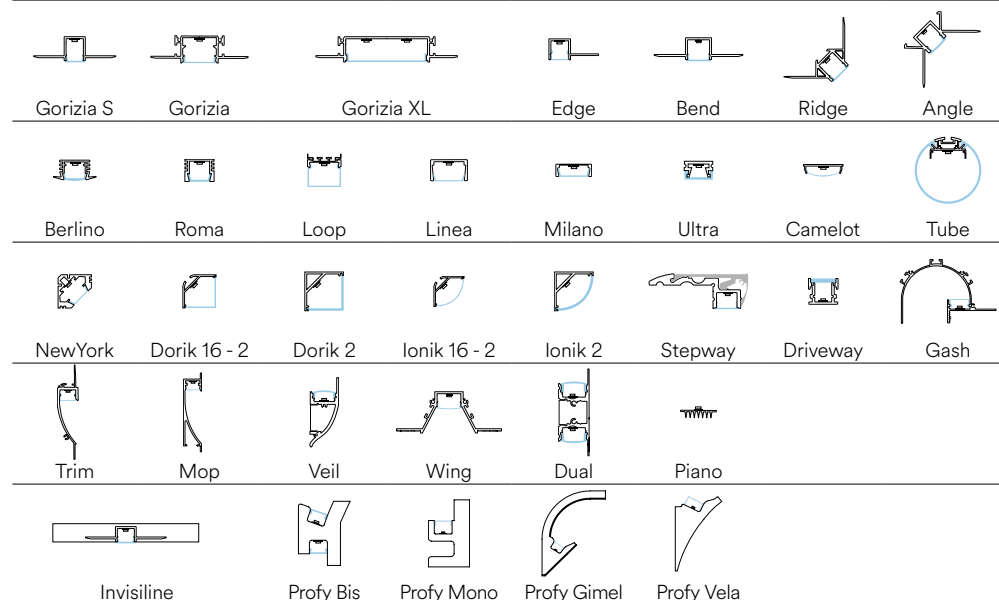

# STRIP24V R20 COB 480

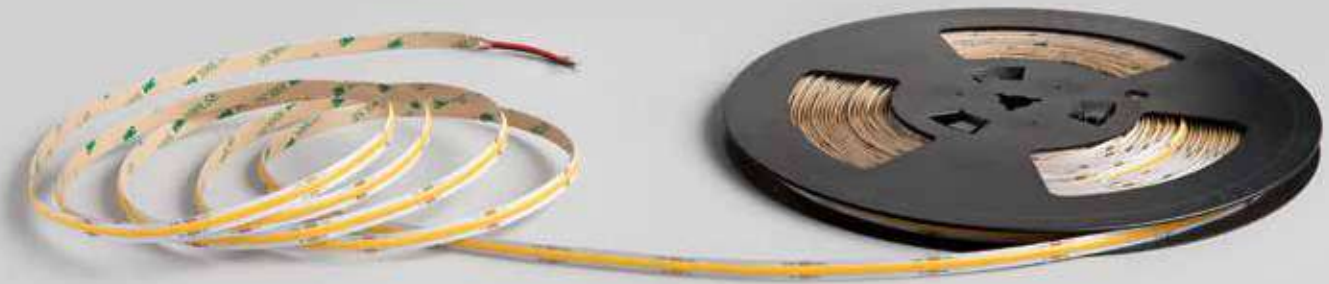

EASY DOMOTICA

Rotolo 20 metri strip led.  
Roll 20 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### Materiale

kapton  
senza silicone

### Temperatura colore

3000K / 4000K



### Driver

DC24V  
tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
without silicone

### Colour temperature

3000K / 4000K



### Driver

DC24V  
constant voltage  
not included

### Life time and on/off

50.000h  
>25.000 on/off

### STRIP24V-R20-COB-480C

8031414925636

lumen/m

1650 lm

### STRIP24V-R20-COB-480M

8031414925643

lumen/m



1725 lm

light source COB 480


watt/m 15W

led/m 480


### Fotometria del prodotto / Photometric curve

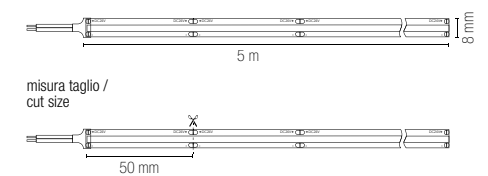

### Recommended Profiles p. 336 to p. 397

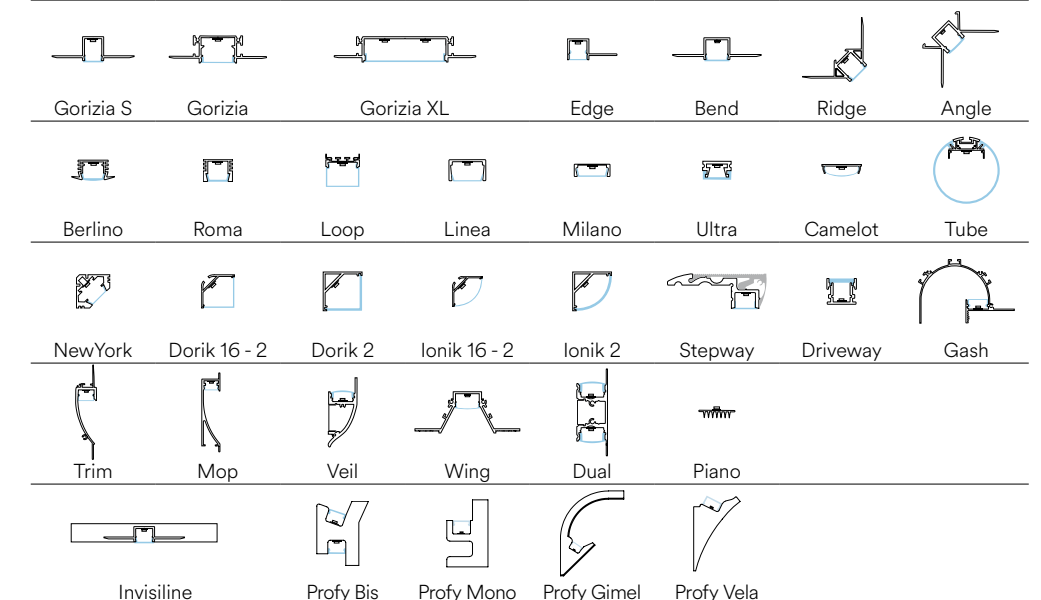

# STRIP24V 2835 HL 128

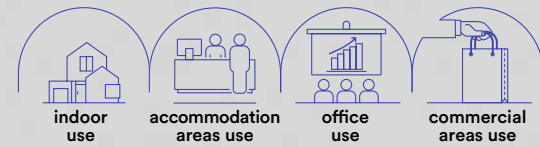

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**

kapton  
senza silicone

**Temperatura colore**  
3000K / 4000K / 6500K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**

kapton  
without silicone

**Colour temperature**  
3000K / 4000K / 6500K





**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**


50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835-HL-128C</b> 8031414925650 lumen/m total lumen	2000 lm 10000 lm
<b>STRIP24V-2835-HL-128M</b> 8031414925667 lumen/m total lumen	2100 lm 10500 lm
<b>STRIP24V-2835-HL-128F</b> 8031414925674 lumen/m total lumen	2050 lm 10250 lm
light source	SMD 2835
watt/m	10W
led/m	128

**Fotometria del prodotto / Photometric curve**

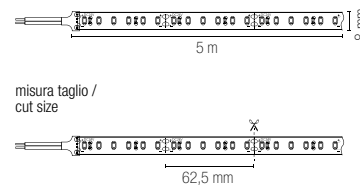

**Recommended Profiles p. 336 to p. 397**

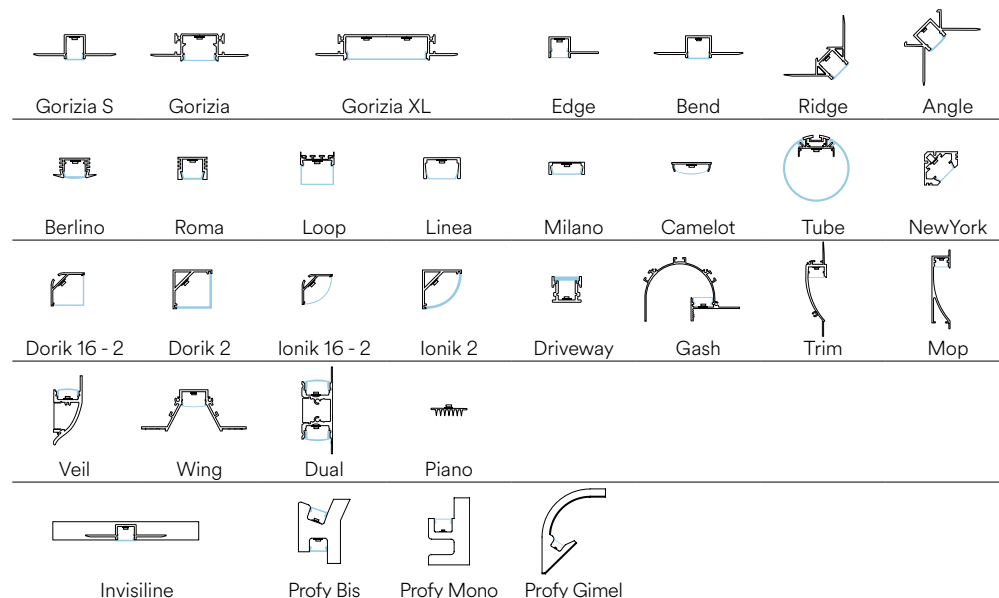

# STRIP24V FOOD



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton con  
rivestimento  
in silicone

**Temperatura colore**  
2000K / 2600K / 5400K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**

kapton  
with silicone  
cover

**Colour temperature**  
2000K / 2600K / 5400K



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**



50.000h  
>25.000 on/off

Illuminazione per generi alimentari /  
Food lighting




	colour temp.
<b>STRIP24V-2835-120MT</b> 8031414925681 lumen/m total lumen	1800 lm 9000 lm
<b>STRIP24V-2835-120BR</b> 8031414925704 lumen/m total lumen	1980 lm 9450 lm
<b>STRIP24V-2835-120FS</b> 8031414925698 lumen/m total lumen	1980 lm 9900 lm
light source	SMD 2835
watt/m	18W
led/m	120

**Fotometria del prodotto / Photometric curve**

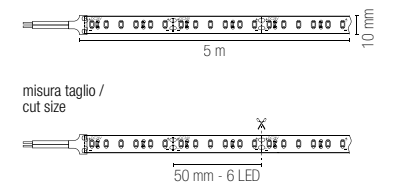


**Recommended Profiles p. 336 to p. 397**

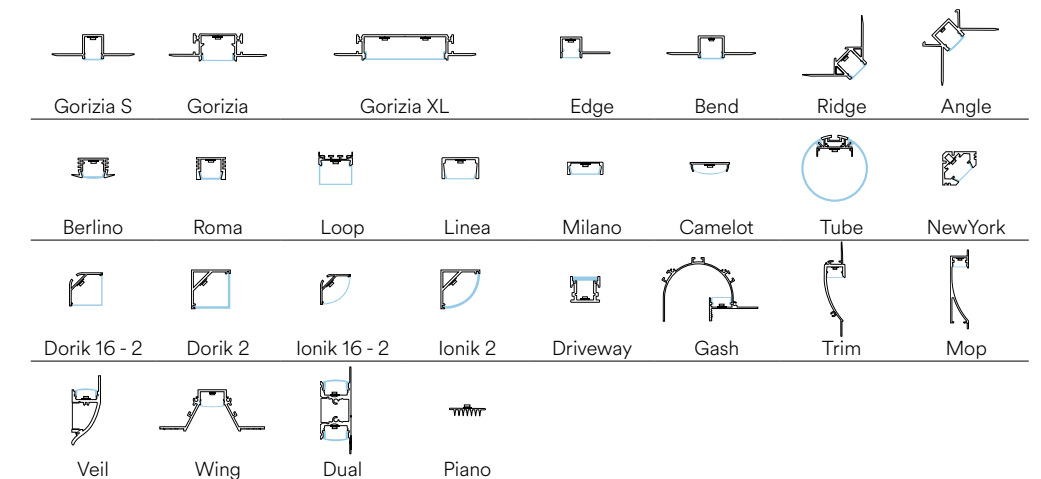

PROFILE STRIP LED / PROFILES AND STRIP LED

In.tec light

# STRIP24V COB

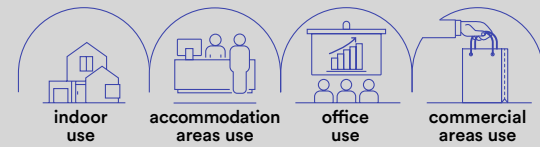

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.





Driver p. 843-852  
Controller p. 854-857




- Materiale**  
kapton  
senza silicone
- Temperatura colore**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
without silicone
- Colour temperature**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-COB-480C</b> 8031414881697 lumen/m total lumen	1538 lm 7690 lm
<b>STRIP24V-COB-480M</b> 8031414883516 lumen/m total lumen	1700 lm 8500 lm
<b>STRIP24V-COB-480F</b> 8031414881703 lumen/m total lumen	1698 lm 8490 lm
light source	LED COB 480
watt/m	16W

Fotometria del prodotto / Photometric curve

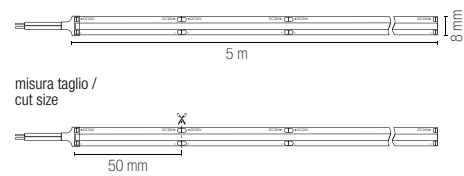

Recommended Profiles p. 336 to p. 397

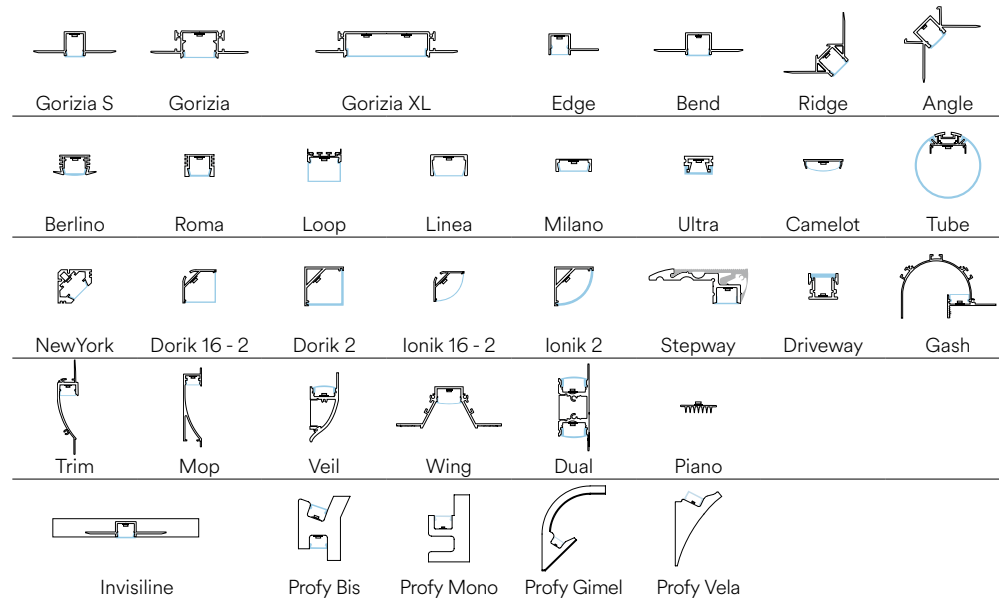

# STRIP24V COB IP67



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.





Driver p. 843-852  
Controller p. 854-857




- Materiale**  
kapton  
con silicone
- Temperatura colore**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
with silicone
- Colour temperature**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-COB-IP67-480C</b> 8031414881710 lumen/m total lumen	1538 lm 7690 lm
<b>STRIP24V-COB-IP67-480M</b> 8031414881727 lumen/m total lumen	1700 lm 8500 lm
<b>STRIP24V-COB-IP67-480F</b> 8031414881734 lumen/m total lumen	1698 lm 8490 lm
light source	LED COB 480
watt/m	16W


Fotometria del prodotto / Photometric curve

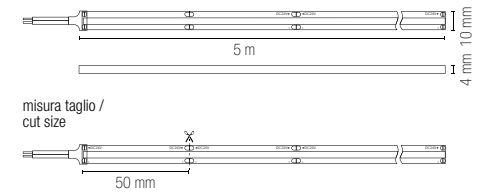

Recommended Profiles p. 336 to p. 397

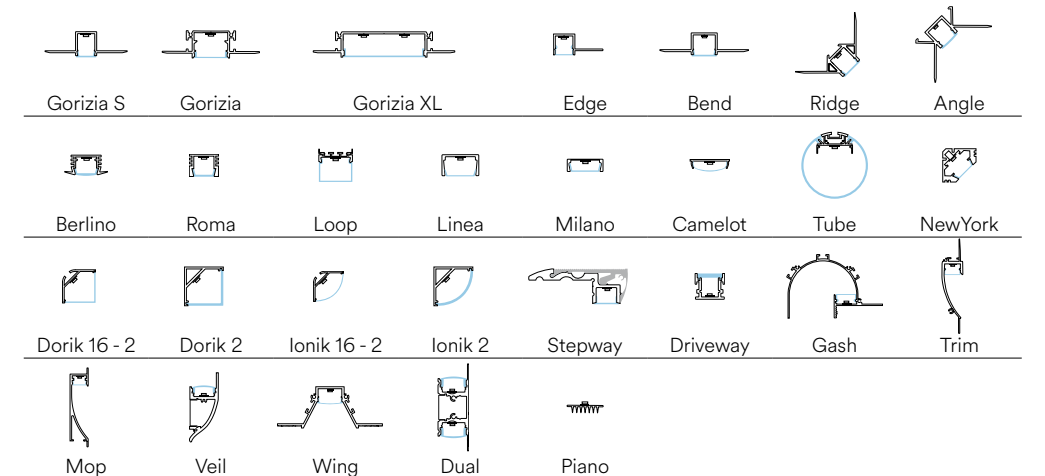

# STRIP24V 2835 3D

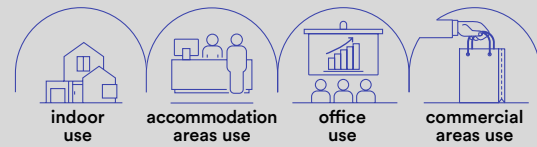

EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**

kapton  
senza silicone

**Temperatura colore**  
3000K / 4000K / 6000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
3000K / 4000K / 6000K




**Driver**  
DC24V  
constant voltage  
not included


**Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835-3D-60C</b> 8031414878765 lumen/m total lumen	 1542 lm 7710 lm
<b>STRIP24V-2835-3D-60M</b> 8031414878727 lumen/m total lumen	 1480 lm 7400 lm
<b>STRIP24V-2835-3D-60F</b> 8031414878628 lumen/m total lumen	 1542 lm 7710 lm
light source	SMD 2835
watt/m	14W
led/m	60


**Fotometria del prodotto / Photometric curve**

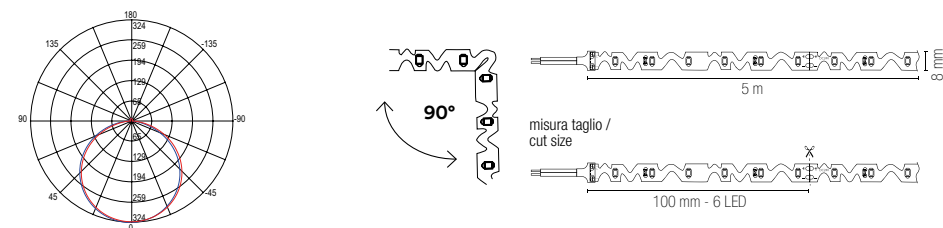

**Recommended Profiles p. 336 to p. 397**

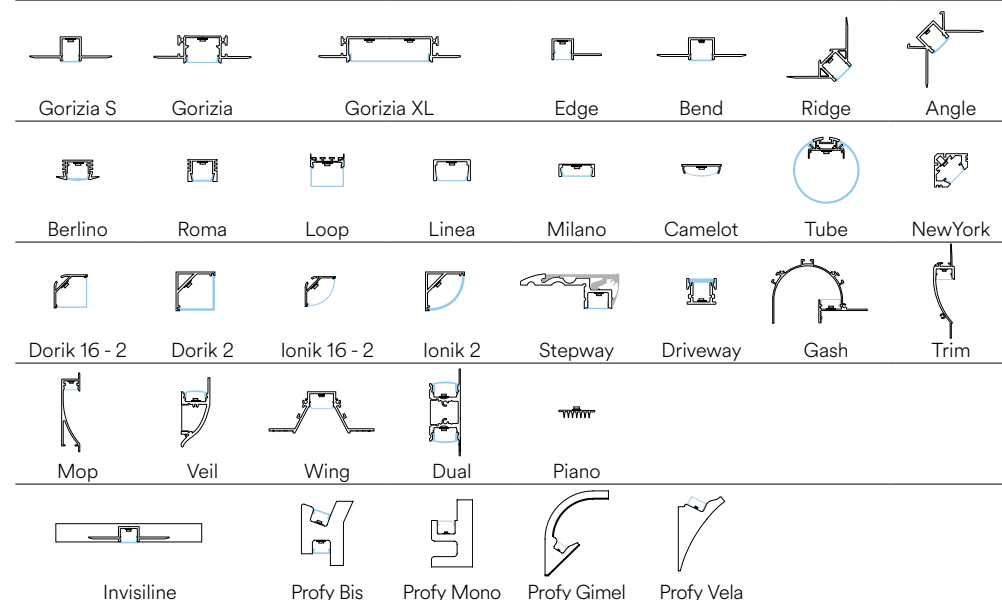

# STRIP24V SLIM 120



EASY DOMOTICA

**Rotolo 5 metri strip led ultrasottile.**  
Roll 5 meters ultra-thin strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**

kapton  
senza silicone

**Temperatura colore**  
3000K / 4000K / 6000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
25.000h  
>15.000 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
3000K / 4000K / 6000K



**Driver**  
DC24V  
constant voltage  
not included


**Life time and on/off**  
25.000h  
>15.000 on/off

	colour temp.
<b>STRIP24V-SLIM-120C</b> 8031414881741 lumen/m total lumen	 1896 lm 9480 lm
<b>STRIP24V-SLIM-120M</b> 8031414881758 lumen/m total lumen	 1838 lm 9190 lm
<b>STRIP24V-SLIM-120F</b> 8031414881765 lumen/m total lumen	 1766 lm 8830 lm
light source	SMD 2835
watt/m	16W
led/m	120


**Fotometria del prodotto / Photometric curve**



**Recommended Profiles p. 336 to p. 397**

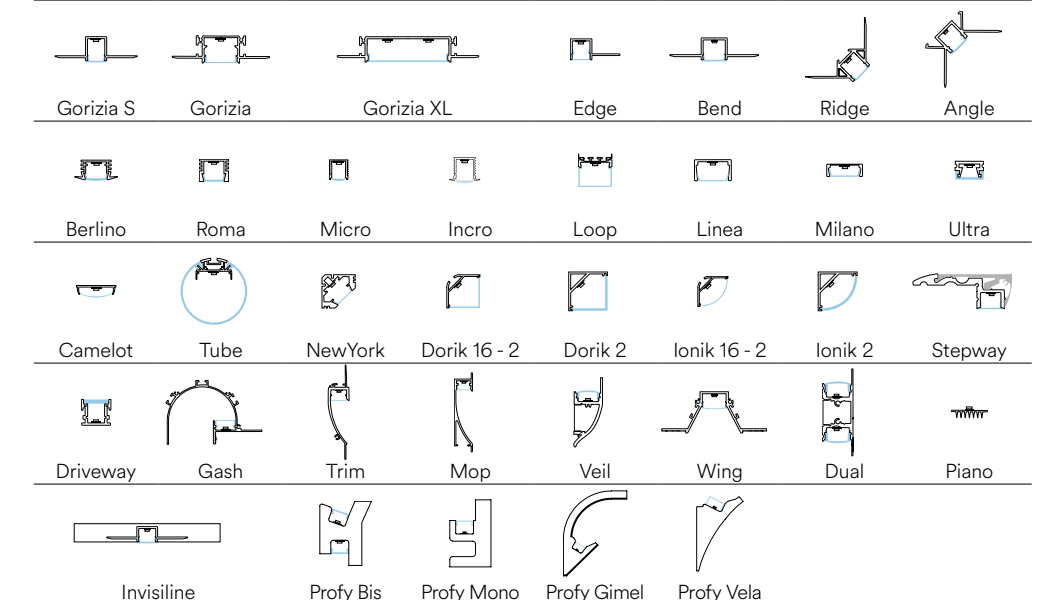

# STRIP24V 2835 60

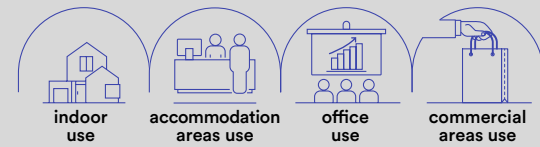

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857


- Materiale**  
kapton  
senza silicone
- Temperatura colore**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
without silicone
- Colour temperature**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835-60C</b> 8031414871278 lumen/m total lumen	1542 lm 7710 lm
<b>STRIP24V-2835-60M</b> 8031414871285 lumen/m total lumen	1480 lm 7400 lm
<b>STRIP24V-2835-60F</b> 8031414871292 lumen/m total lumen	1542 lm 7710 lm
light source	SMD 2835
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve



Recommended Profiles p. 336 to p. 397

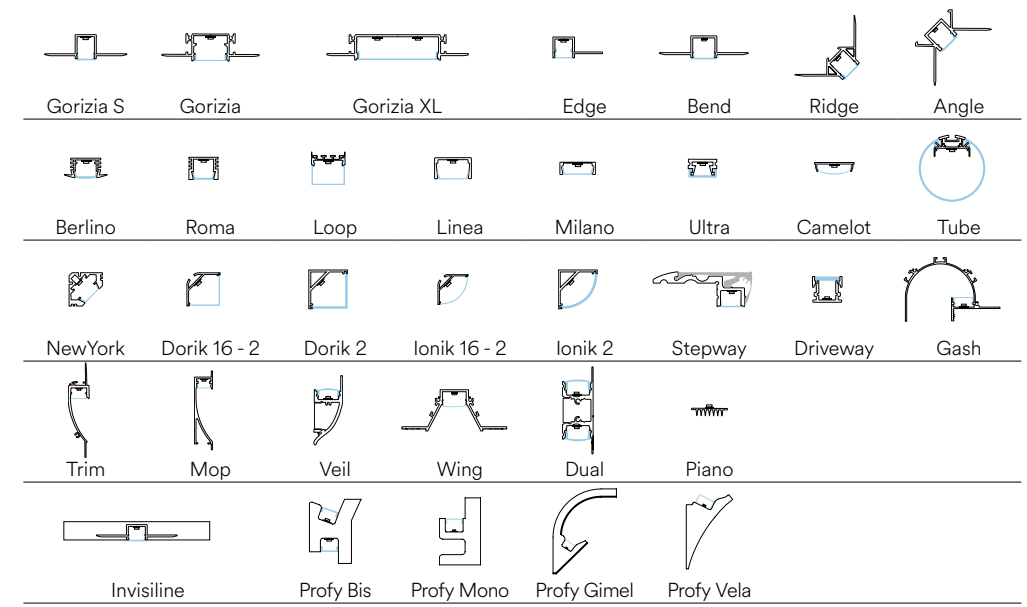

# STRIP24V 2835 60 IP67



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.




Driver p. 843-852  
Controller p. 854-857


- Materiale**  
kapton con  
rivestimento  
in silicone
- Temperatura colore**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
tensione costante  
non incluso
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
kapton  
with silicone  
cover
- Colour temperature**  
3000K / 4000K / 6000K
- Driver**  
DC24V  
constant voltage  
not included
- Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-2835IP67-60C</b> 8031414871308 lumen/m total lumen	1542 lm 7710 lm
<b>STRIP24V-2835IP67-60M</b> 8031414871315 lumen/m total lumen	1480 lm 7400 lm
<b>STRIP24V-2835IP67-60F</b> 8031414871322 lumen/m total lumen	1542 lm 7710 lm
light source	SMD 2835
watt/m	14W
led/m	60

Fotometria del prodotto / Photometric curve

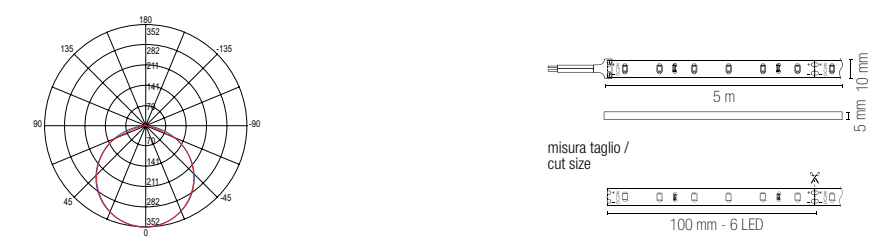


Recommended Profiles p. 336 to p. 397

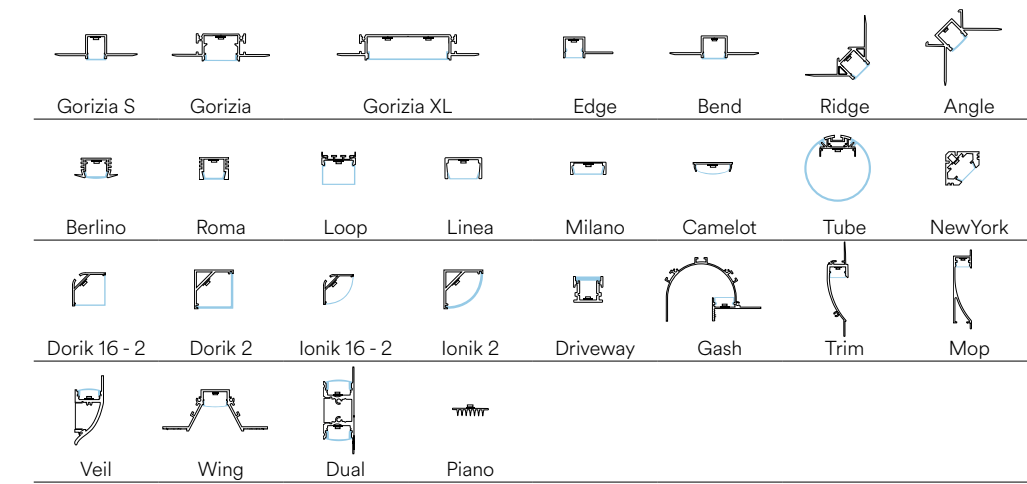

PROFILE STRIP LED / PROFILES AND STRIP LED

In.tec light

# STRIP24V 2835 120

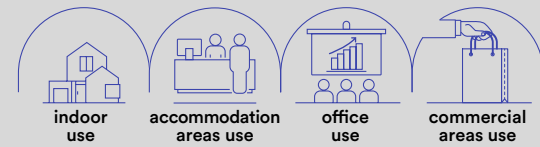

Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**STRIP24V-2835-120C**

8031414871056  
lumen/m 2342 lm  
total lumen 11710 lm

**STRIP24V-2835-120M**

8031414871063  
lumen/m 2280 lm  
total lumen 11400 lm

**STRIP24V-2835-120F**

8031414871032  
lumen/m 2258 lm  
total lumen 11290 lm

**STRIP24V-2835-120BLU**

8031414871049  
lumen BLU  
light source SMD 2835  
watt/m 22W  
led/m 120

colour temp.



**Materiale**

kapton  
senza silicone

**Temperatura colore**  
3000K/4000K/6000K/BLU



**Driver**

DC24V  
tensione costante  
non incluso

**Durata e on/off**

50.000h  
>25.000 on/off

**Material**

kapton  
without silicone

**Colour temperature**  
3000K/4000K/6000K/BLU





**Driver**

DC24V  
constant voltage  
not included


**Life time and on/off**

50.000h  
>25.000 on/off

**Fotometria del prodotto / Photometric curve**

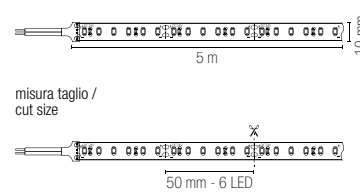

**Recommended Profiles p. 336 to p. 397**

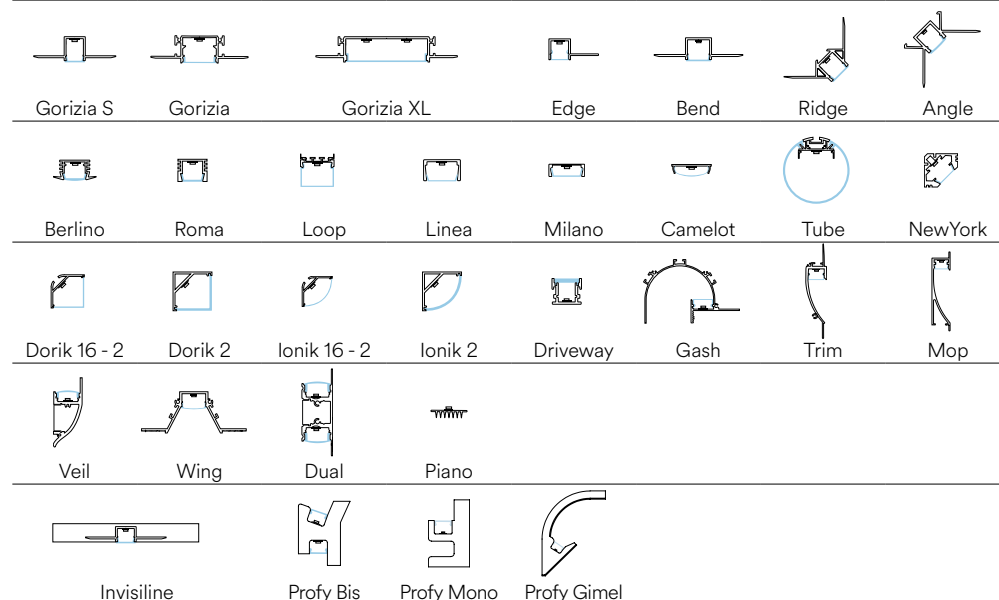

# STRIP24V 2835 120 IP68



EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**STRIP24V-2835IP68-120F**

8031414881772  
lumen/m 2258 lm  
total lumen 11290 lm

**STRIP24V-2835IP68-120F**

8031414881772  
lumen/m 2258 lm  
total lumen 11290 lm

**STRIP24V-2835IP68-120F**

8031414881772  
lumen/m 2258 lm  
total lumen 11290 lm

**STRIP24V-2835IP68-120F**

8031414881772  
lumen BLU  
light source LED COB 120  
watt/m 18W  
led/m 120

colour temp.



**Materiale**

kapton  
con silicone

**Temperatura colore**  
6000K



**Driver**

DC24V  
tensione costante  
non incluso

**Durata e on/off**

50.000h  
>25.000 on/off

**Material**

kapton  
with silicone

**Colour temperature**  
6000K





**Driver**

DC24V  
constant voltage  
not included


**Life time and on/off**

50.000h  
>25.000 on/off

**Fotometria del prodotto / Photometric curve**

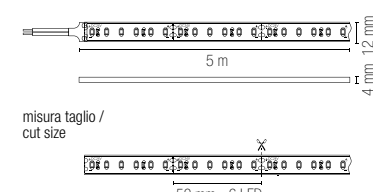

**Recommended Profiles p. 336 to p. 397**

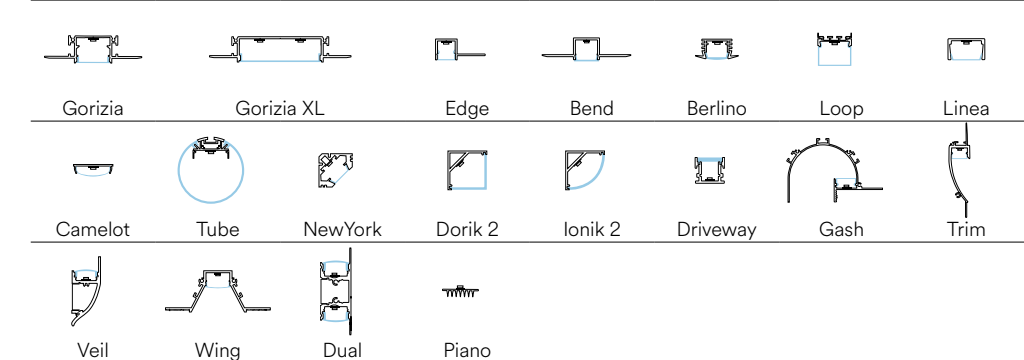


PROFILE STRIP LED / PROFILES AND STRIP LED

In.tec light



# STRIP24V 2835 CCT

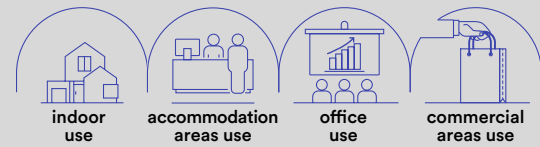

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### STRIP24V-2835-CCT

8031414875795  
lumen/m  
total lumen

colour temp.

2652 lm  
13260 lm

light source SMD 2835  
watt/m 26W  
led/m 120

### Materiale

kapton  
senza silicone

### Temperatura colore

CCT



### Driver

DC24V

tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
without silicone

### Colour temperature

CCT



### Driver




DC24V

constant voltage  
not included


### Life time and on/off

50.000h  
>25.000 on/off


### Fotometria del prodotto / Photometric curve



### Recommended Profiles p. 336 to p. 397

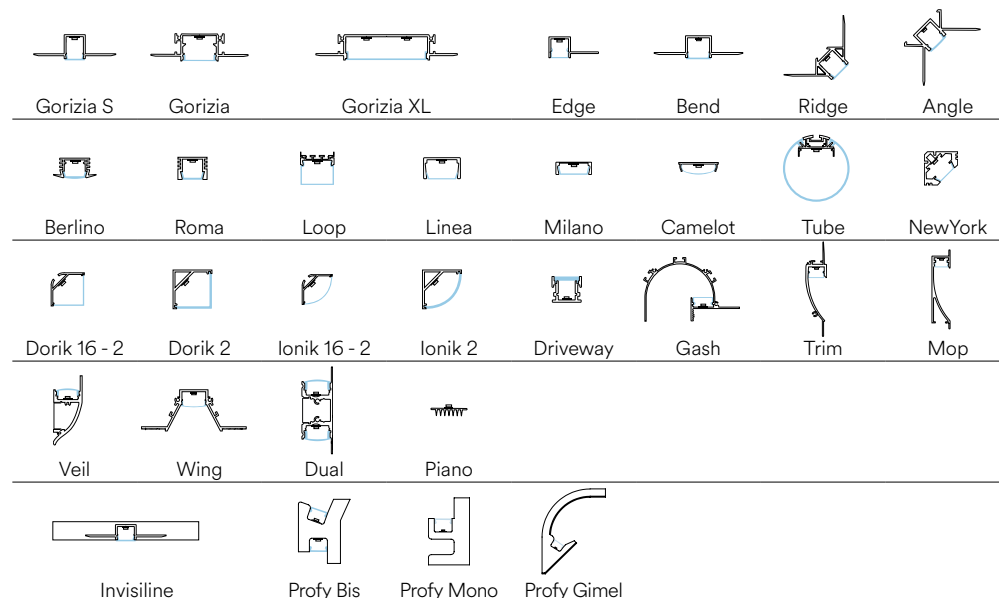

# STRIP24V 2835 240



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### STRIP24V-2835-240C

8031414871018  
lumen/m  
total lumen

colour temp.

2706 lm  
13530 lm

### STRIP24V-2835-240M

8031414871025  
lumen/m  
total lumen

colour temp.

2640 lm  
13200 lm

### STRIP24V-2835-240F

8031414871001  
lumen/m  
total lumen

colour temp.

2526 lm  
12630 lm

light source SMD 2835  
watt/m 26W  
led/m 240

### Materiale

kapton  
senza silicone

### Temperatura colore

3000K / 4000K / 6000K



### Driver

DC24V

tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
without silicone

### Colour temperature

3000K / 4000K / 6000K



### Driver



DC24V

constant voltage  
not included


### Life time and on/off

50.000h  
>25.000 on/off


### Fotometria del prodotto / Photometric curve



### Recommended Profiles p. 336 to p. 397

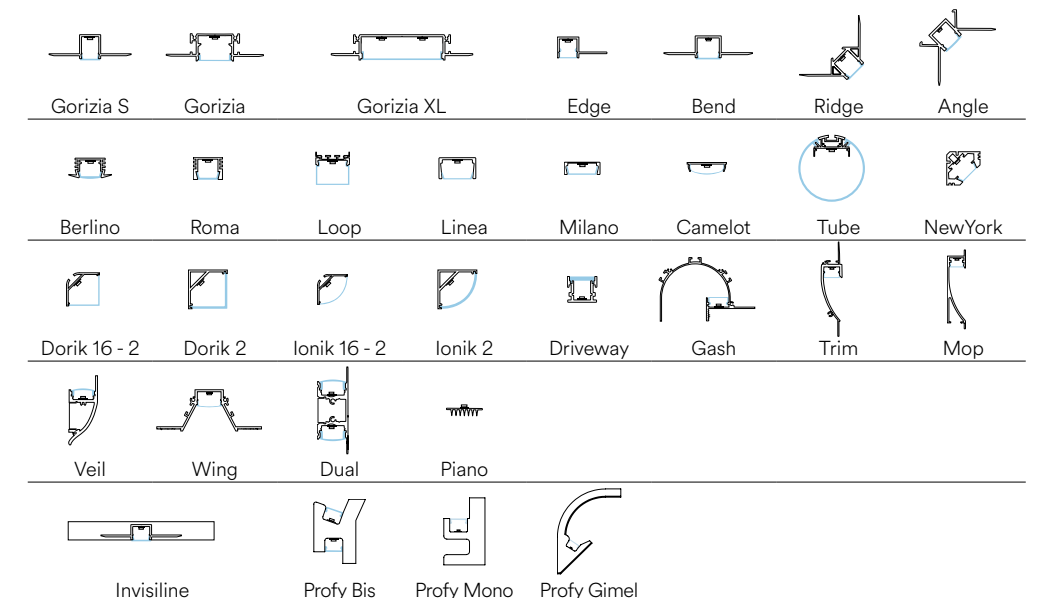

# STRIP24V 5050 60

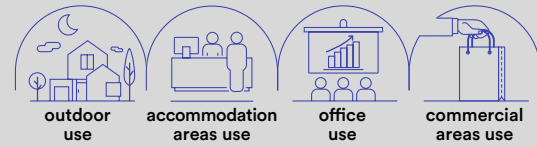

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### Materiale

kapton  
senza silicone

**Temperatura colore**  
3000K / 4000K / 6000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
3000K / 4000K / 6000K






**Driver**  
DC24V  
constant voltage  
not included


**Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-5050-60C</b> 8031414878420 lumen/m total lumen	1390 lm 6950 lm
<b>STRIP24V-5050-60M</b> 8031414878741 lumen/m total lumen	1430 lm 7150 lm
<b>STRIP24V-5050-60F</b> 8031414876129 lumen/m total lumen	1314 lm 6570 lm
light source	SMD 5050
watt/m	14W
led/m	60

### Fotometria del prodotto / Photometric curve



### Recommended Profiles p. 336 to p. 397

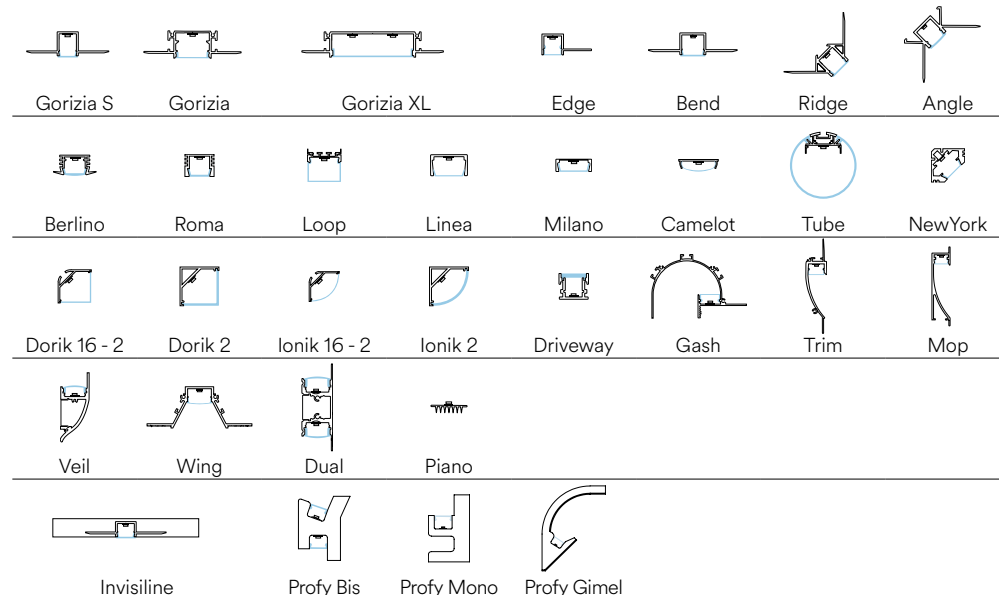

# STRIP24V 5050 60 IP67



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton con  
rivestimento  
in silicone

**Temperatura colore**  
3000K / 4000K / 6000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
with silicone  
cover

**Colour temperature**  
3000K / 4000K / 6000K





**Driver**  
DC24V  
constant voltage  
not included


**Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>STRIP24V-5050IP67-60C</b> 8031414876143 lumen/m total lumen	1390 lm 6950 lm
<b>STRIP24V-5050IP67-60M</b> 8031414876150 lumen/m total lumen	1430 lm 7150 lm
<b>STRIP24V-5050IP67-60F</b> 8031414876174 lumen/m total lumen	1314 lm 6570 lm
light source	SMD 5050
watt/m	14W
led/m	60


### Fotometria del prodotto / Photometric curve



### Recommended Profiles p. 336 to p. 397

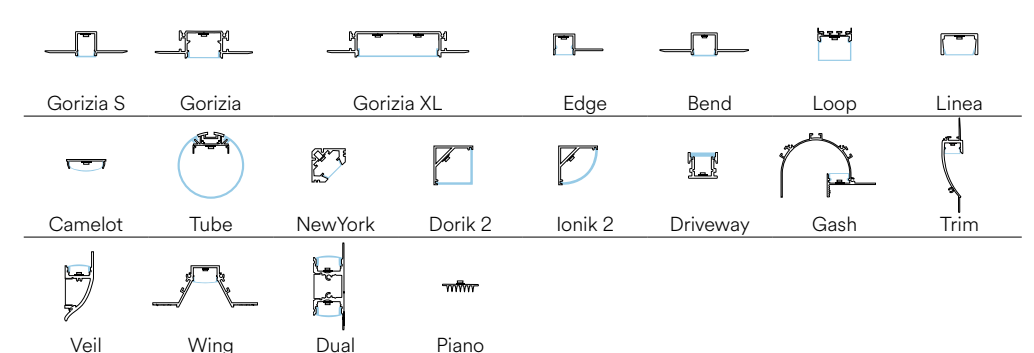

# STRIP24V 5050 RGB

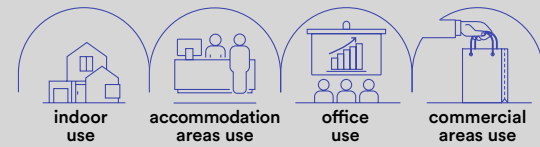

EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton  
senza silicone

**Temperatura colore**  
RGB



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
RGB



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off

**STRIP24V-5050-RGB**  
8031414871360


colour temp.  
RGB

light source	SMD 5050
watt/m	14,4W
led/m	60

**Fotometria del prodotto / Photometric curve**



**Recommended Profiles p. 336 to p. 397**

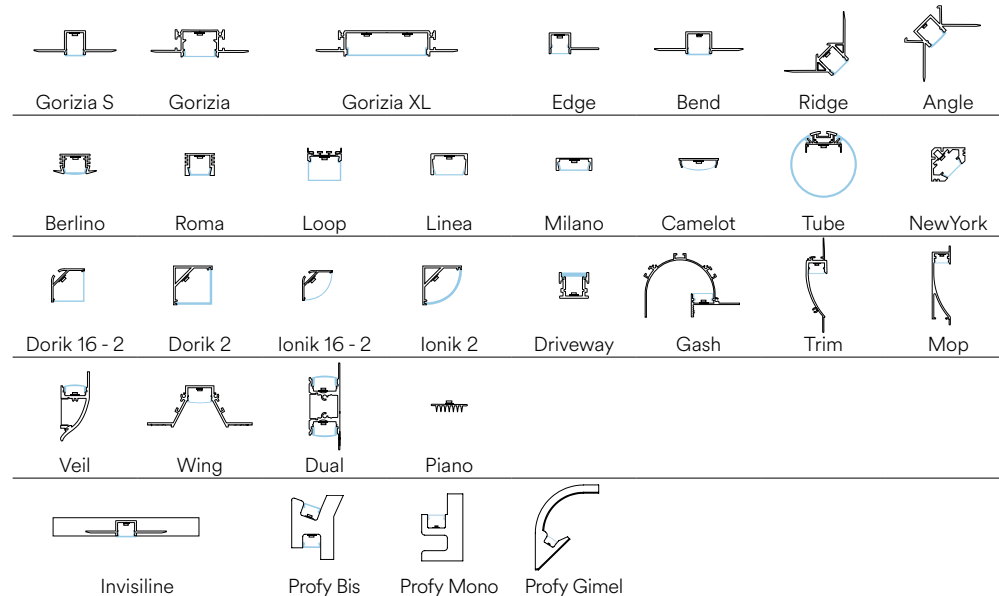

# STRIP24V 5050 RGB IP67



EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton con  
rivestimento  
in silicone

**Temperatura colore**  
RGB



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
with silicone  
cover

**Colour temperature**  
RGB



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off

**STRIP24V-5050RGB-IP67**  
8031414871377


colour temp.  
RGB

light source	SMD 5050
watt/m	14,4W
led/m	60


**Fotometria del prodotto / Photometric curve**



**Recommended Profiles p. 336 to p. 397**

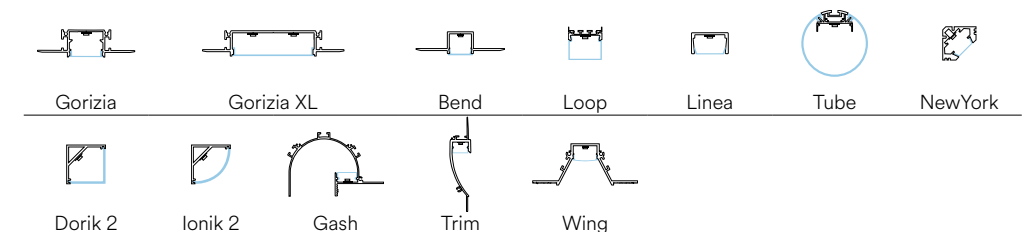

# STRIP24V 5050 RGBW

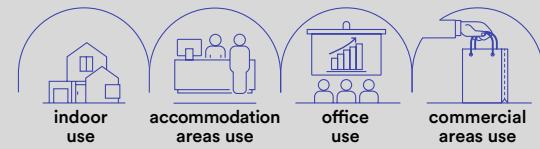

EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### Materiale

kapton  
senza silicone

### Temperatura colore

RGB + 4000K



### Driver

DC24V  
tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
without silicone

### Colour temperature

RGB + 4000K



### Driver



DC24V  
constant voltage  
not included

### Life time and on/off


50.000h  
>25.000 on/off

<b>STRIP24V-5050-RGBW</b>		colour temp.
8031414871384		RGB + 1080 lm
lumen/m		5400 lm
total lumen		
light source		SMD 5050
watt/m		19,2W
led/m		60

### Fotometria del prodotto / Photometric curve

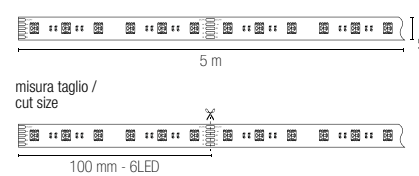

### Recommended Profiles p. 336 to p. 397

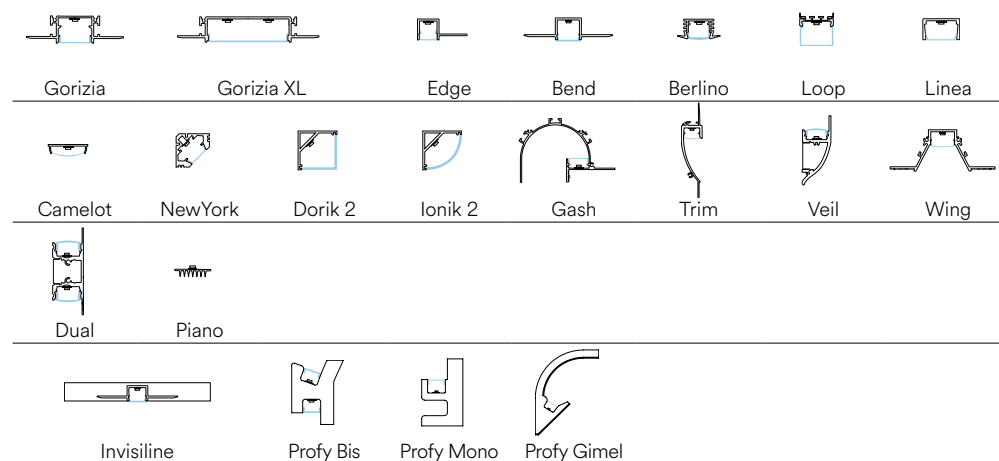

# STRIP24V 5050 RGBW IP68



EASY DOMOTICA

Rotolo 5 metri strip led.  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



### Materiale

kapton con  
rivestimento  
in silicone

### Temperatura colore

RGB + 4000K



### Driver

DC24V  
tensione costante  
non incluso

### Durata e on/off

50.000h  
>25.000 on/off

### Material

kapton  
with silicone  
cover

### Colour temperature

RGB + 4000K



### Driver



DC24V  
constant voltage  
not included

### Life time and on/off


50.000h  
>25.000 on/off

<b>STRIP24V-5050RGBW-IP68</b>		colour temp.
8031414871407		RGB + 1080 lm
lumen/m		5400 lm
total lumen		
light source		SMD 5050
watt/m		19,2W
led/m		60


### Fotometria del prodotto / Photometric curve

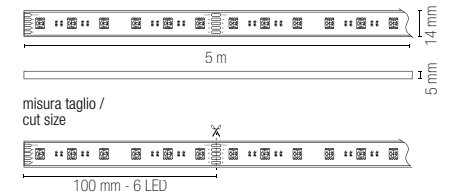

### Recommended Profiles p. 336 to p. 397

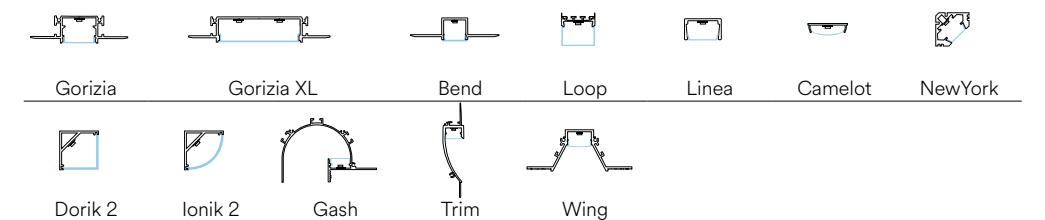

# STRIP230V SMD

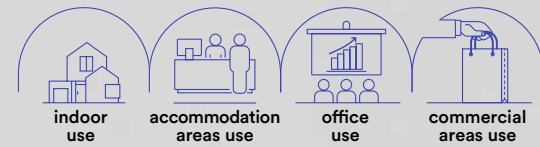

**Rotolo 20 metri strip led.**  
Roll 20 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton con rivestimento in silicone

**Temperatura colore**  
3000K / 4000K / 6500K

**Driver**  
220V DC incluso

**Durata e on/off**  
50.000h  
>25.000 on/off


**Material**  
kapton with silicone cover

**Colour temperature**  
3000K / 4000K / 6500K

**Driver**  
220V DC included

**Life time and on/off**  
50.000h  
>25.000 on/off


	colour temp.		colour temp.
<b>STRIP220V-2835-8C</b> 8031414926930 lumen/m	800 lm	<b>STRIP220V-2835-15C</b> 8031414927005 lumen/m	1700 lm
<b>STRIP220V-2835-8M</b> 8031414926947 lumen/m	800 lm	<b>STRIP220V-2835-15M</b> 8031414927005 lumen/m	1700 lm
<b>STRIP220V-2835-8F</b> 8031414926954 lumen/m	800 lm	<b>STRIP220V-2835-15F</b> 8031414927029 lumen/m	1700 lm
light source	LED SMD 2835	light source	LED SMD 2835
watt/m	8W	watt/m	15W
led/m	120	led/m	120

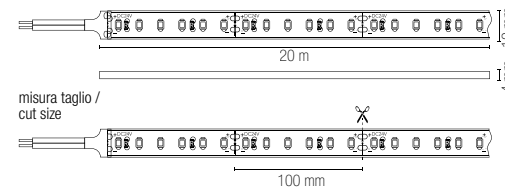

**Accessori non inclusi / Not included accessories**

	<b>STRIP220V-8-L-CONN</b> 8031414926992 Connettore a L / L connector	<b>STRIP220V-10-L-CONN</b> 8031414927067 Connettore a L / L connector
	<b>STRIP220V-8-FLEX</b> 8031414926978 Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable	<b>STRIP220V-10-FLEX</b> 8031414927043 Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable
	<b>STRIP220V-8-NEST</b> 8031414926961 Innesto con cavo 20 cm / Nest with 20 cm cable	<b>STRIP220V-10-NEST</b> 8031414927036 Innesto con cavo 20 cm / Nest with 20 cm cable
	<b>STRIP220V-8-CAPS</b> 8031414927210 Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap	<b>STRIP220V-10-CAPS</b> 8031414927227 Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap

# STRIP230V COB



**Rotolo 20 metri strip led.**  
Roll 20 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton con rivestimento in silicone

**Temperatura colore**  
3000K / 4000K / 6500K

**Driver**  
220V DC incluso

**Durata e on/off**  
50.000h  
>25.000 on/off


**Material**  
kapton with silicone cover

**Colour temperature**  
3000K / 4000K / 6500K

**Driver**  
220V DC included

**Life time and on/off**  
50.000h  
>25.000 on/off


	colour temp.
<b>STRIP220V-COB-12C</b> 8031414927074 lumen/m	920 lm
<b>STRIP220V-COB-12M</b> 8031414927081 lumen/m	920 lm
<b>STRIP220V-COB-12F</b> 8031414927098 lumen/m	920 lm
light source	LED COB
watt/m	12W
led/m	260

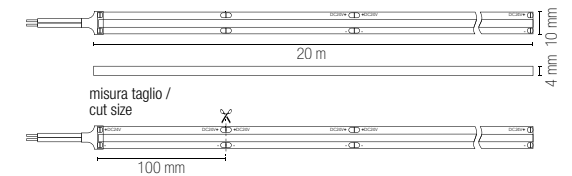

**Accessori non inclusi / Not included accessories**

	<b>STRIP220V-12-L-CONN</b> 8031414927111 Connettore a L / L connector
	<b>STRIP220V-12-CONN</b> 8031414927104 Connettore a l / l connector
	<b>STRIP220V-12-NEST</b> 8031414927135 Innesto con cavo 20 cm / Nest with 20 cm cable
	<b>STRIP220V-12-CAPS</b> 8031414927234 Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap
	<b>STRIP220V-12-ST</b> 8031414927128 Kit 10 pcs staffette per fissaggio / Strip 220 10 pcs fixyng bracket

# STRIP24V 5050 3D RGBW

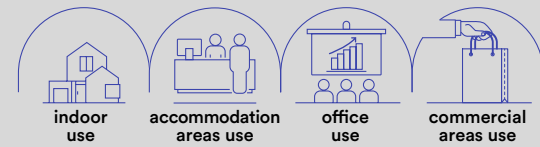

EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton  
senza silicone

**Temperatura colore**  
RGB



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
RGB



**Driver**  
DC24V  
constant voltage  
not included


**Life time and on/off**  
50.000h  
>25.000 on/off

**STRIP24V-5050-3D-RGBW**  
8031414878819  
lumen/m


colour temp.  
RGB + 264 lm

light source SMD 5050  
watt/m 10W  
led/m 48


**Fotometria del prodotto / Photometric curve**

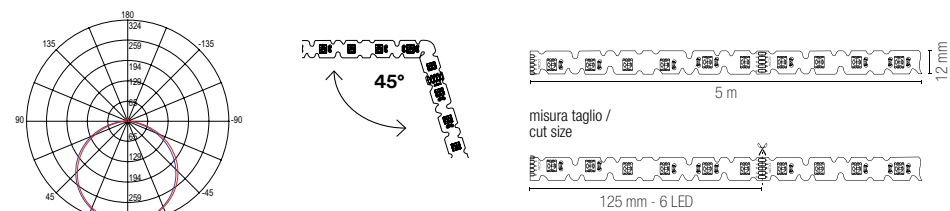

**Recommended Profiles p. 336 to p. 397**

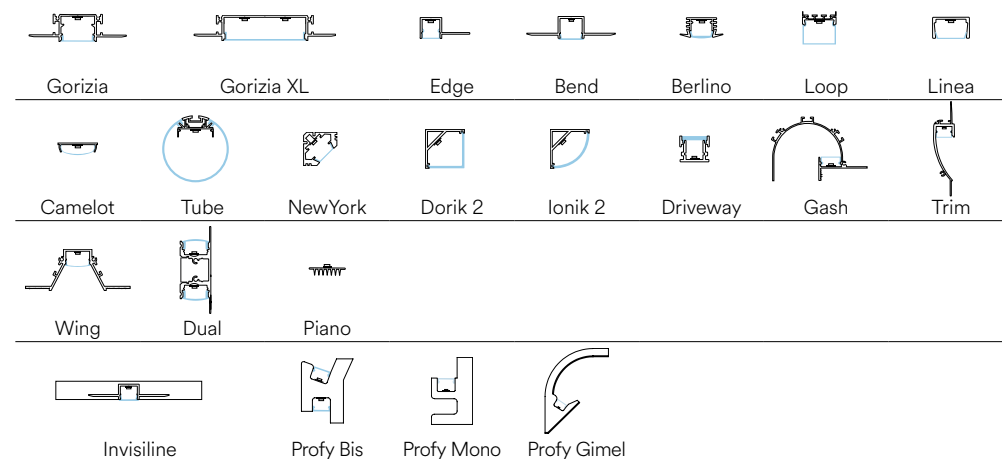

# STRIP24V 5050 RGB CCT

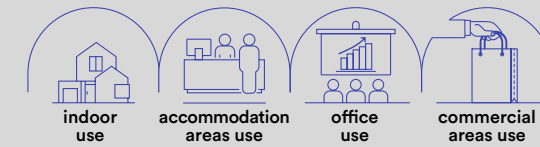


EASY DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton  
con silicone

**Temperatura colore**  
RGB + CCT



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
kapton  
with silicone

**Colour temperature**  
RGB + CCT



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off

**STRIP24V-5050-RGBCCT**  
8031414871391

colour temp.  
712 lm  
3560 lm


lumen/m 712 lm  
total lumen 3560 lm

light source SMD 5050  
watt/m 19,2W  
led/m 60

**Fotometria del prodotto / Photometric curve**




**Recommended Profiles p. 336 to p. 397**

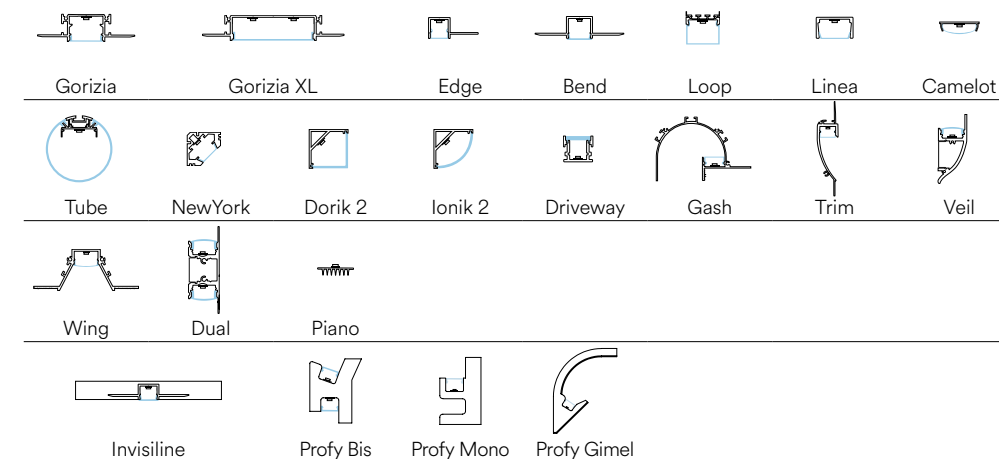

In.tec light PROFILE STRIP LED / PROFILES AND STRIP LED

# STRIP24V 3838 168 RGB

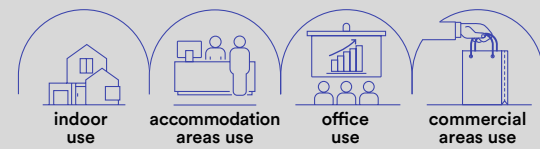

EASY  
DOMOTICA

**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.



Driver p. 843-852  
Controller p. 854-857



**STRIP24V-3838-168RGB**  
8031414877898

colour temp.



RGB

light source	SMD 3838
watt/m	24W
led/m	168

**Materiale**

kapton  
senza silicone

**Temperatura colore**

RGB



**Driver**  
DC24V

tensione costante  
non incluso

**Durata e on/off**

50.000h  
>25.000 on/off

**Material**

kapton  
without silicone

**Colour temperature**

RGB





**Driver**  
DC24V

constant voltage  
not included



**Life time and on/off**

50.000h  
>25.000 on/off


**Fotometria del prodotto / Photometric curve**

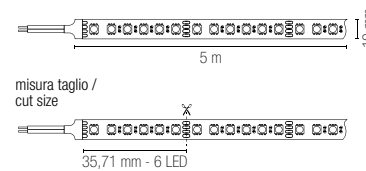

**Recommended Profiles p. 336 to p. 397**

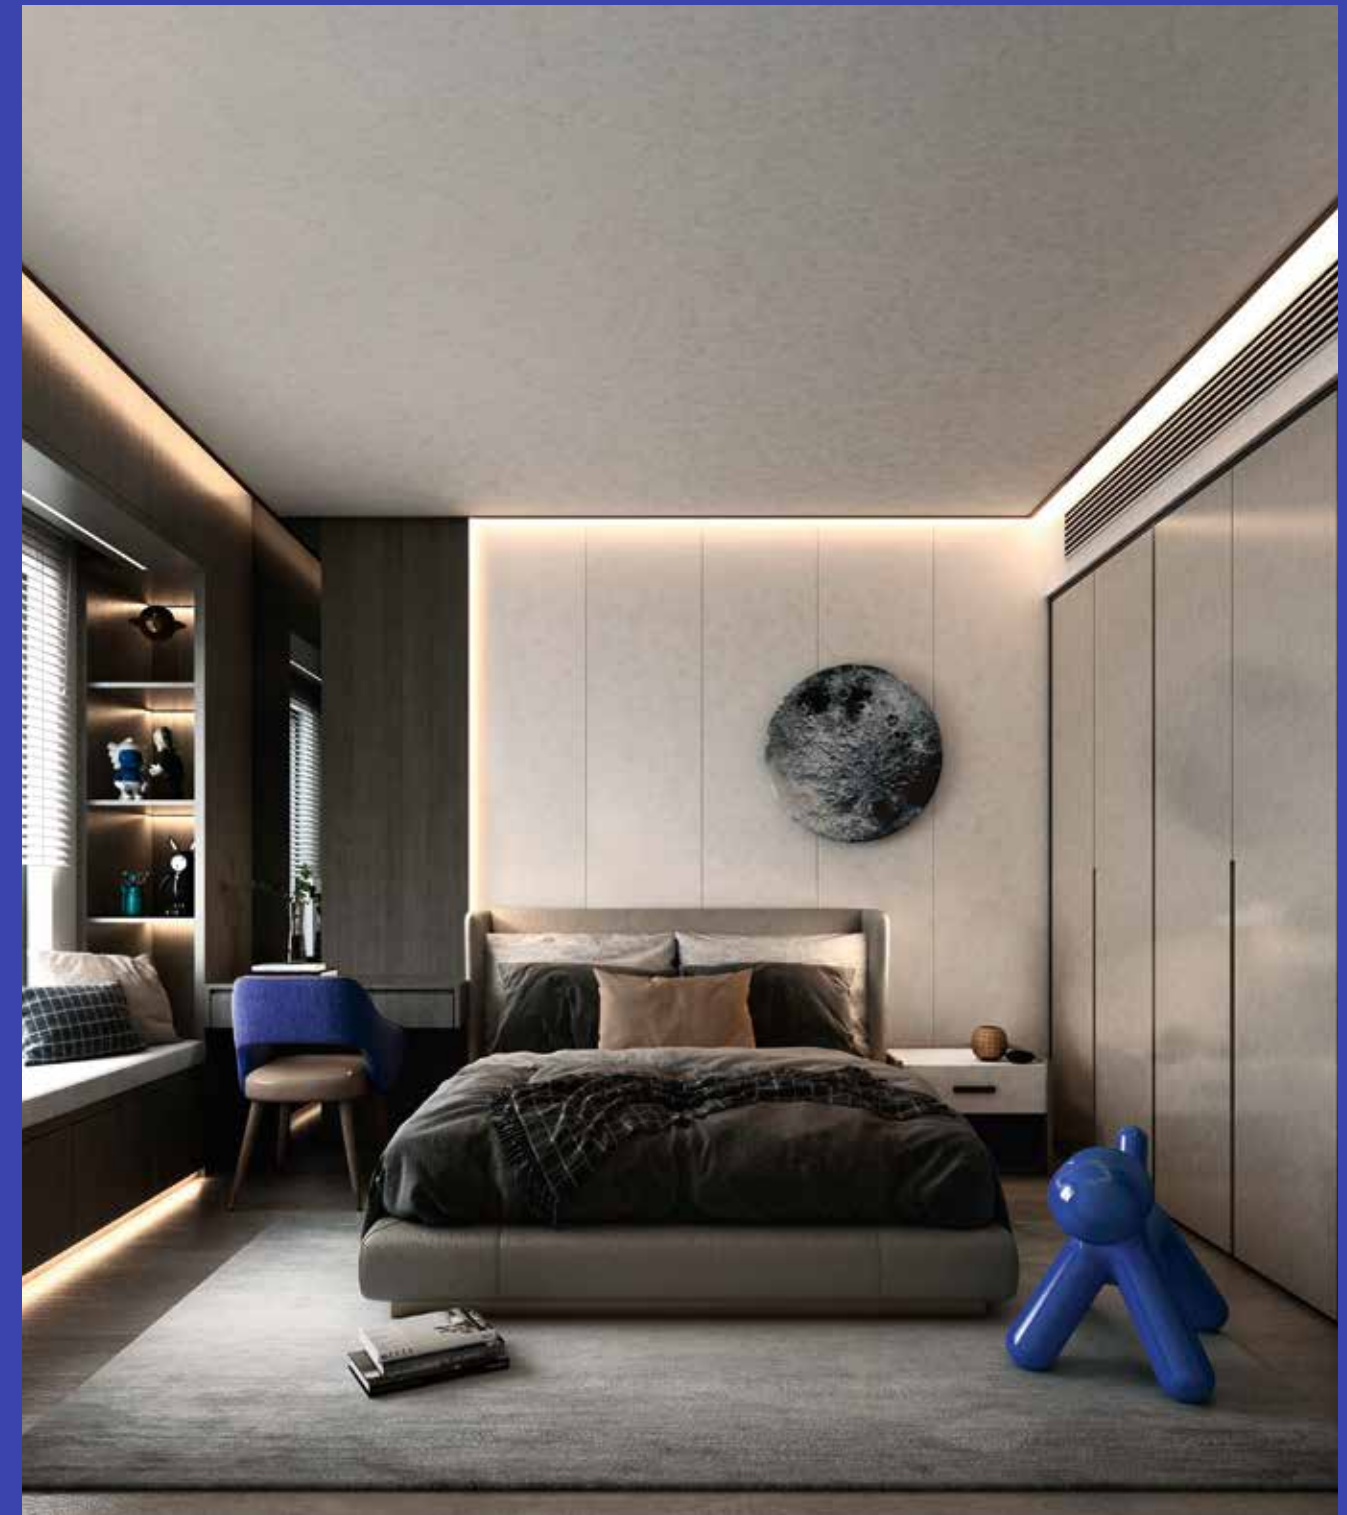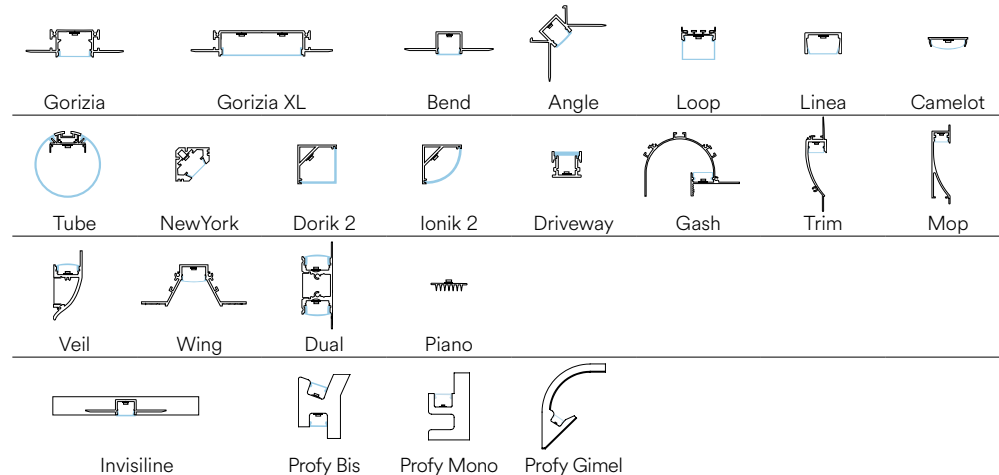

# STRIP24V 5050 RGBW INT

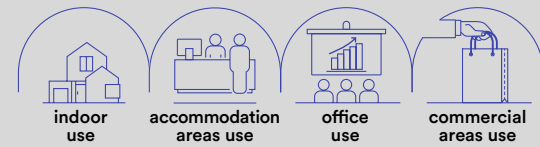


WI-FI  
SMART INTEC

Kit strip LED Wi-Fi.  
Kit strip LED Wi-Fi.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton  
senza silicone

**Temperatura colore**  
RGB + 4000K

**Driver**  
12V DC  
incluso

**Durata e on/off**  
25.000h  
>12.500 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
RGB + 4000K


**Driver**  
12V DC  
included

**Life time and on/off**  
25.000h  
>12.500 on/off


<b>STRIP24V-5050RGBW-INT</b> 8031414881796	colour temp.
lumen/m	280 lm
total lumen	540 lm

light source	SMD 5050
watt/m	12W
led/m	60


Accessori inclusi / Included accessories




Driver + Telecomando + accessori Wi-Fi /  
Diver + Remote control + Wi-Fi accessories

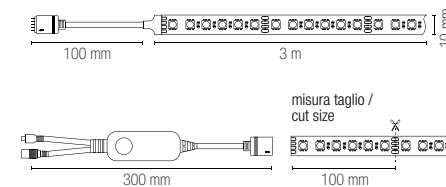

Control system easy installation



# STRIP24V 2835 INT



WI-FI  
SMART INTEC

Kit strip LED Wi-Fi.  
Kit strip LED Wi-Fi.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
kapton  
senza silicone

**Temperatura colore**  
3000K / 4000K

**Driver**  
12V DC  
incluso

**Durata e on/off**  
25.000h  
>12.500 on/off

**Material**  
kapton  
without silicone

**Colour temperature**  
3000K / 4000K

**Driver**  
12V DC  
included


**Life time and on/off**  
25.000h  
>12.500 on/off

<b>STRIP24V-2835C-INT</b> 8031414882182	colour temp.
lumen/m	380 lm
total lumen	760 lm


<b>STRIP24V-2835M-INT</b> 8031414881789	colour temp.
lumen/m	380 lm
total lumen	760 lm

light source	SMD 2835
watt/m	8W
led/m	60


Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /  
Diver + Remote control + Wi-Fi accessories

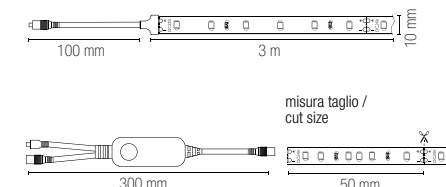

Control system easy installation





# INSIGN

**Kit 20 pz moduli LED.**  
Kit 20 pcs LED module.




kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
PC

**Temperatura colore**  
6000K



**Driver**  
DC12V

tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
PC

**Colour temperature**  
6000K




**Driver**  
DC12V

constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off


**LED-INSIGN-F-LENS**  
8031414871155  
lumen

colour temp.




120 lm/m

sorgente luminosa / light source LED SMD 5050  
watt/m 20 x 1,2W  
beam angle 160°



**Kit 20 pz moduli LED.**  
Kit 20 pcs LED module.

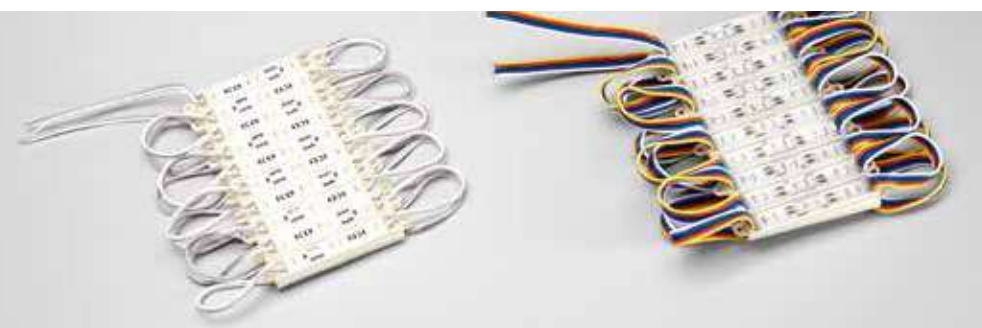


kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY DOMOTICA



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
PC

**Temperatura colore**  
RGB + 6000K



**Driver**  
DC12V

tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
PC

**Colour temperature**  
RGB + 6000K



**Driver**  
DC12V

constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off


**LED-INSIGN-F**  
8031414862979  
lumen

colour temp.



72 lm/m

light source SMD 5050  
watt/m 20 x 0,72W  
beam angle 120°




**LED-INSIGN-RGBW**  
8031414862955  
lumen

colour temp.



RGB + 72 lm/m

light source SMD 5050  
watt/m 20 x 0,96W  
beam angle 120°



# STRIP SURROUND

**Strip LED comando touch con attacco USB.**  
LED strip light with switch touch control and USB connection.




**Materiale**  
kapton con  
rivestimento in silicone

**Temperatura colore**  
RGB



**Material**  
kapton with  
silicone cover

**Colour temperature**  
RGB

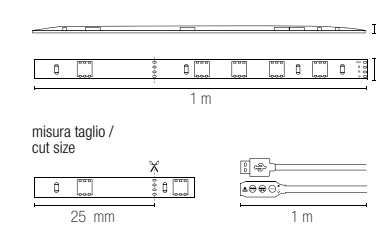

**STRIP-SURROUND**  
8031440354202


colour temp.



RGB


light source SMD 5050  
watt/m 1,5W  
led/m 15

**Kit strip con telecomando e funzione RGB music color con attacco USB.**  
Kit strip with remote control and RGB music function with USB connection.



**Materiale**  
kapton con  
rivestimento in silicone

**Temperatura colore**  
RGB

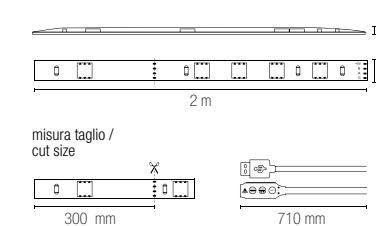

**STRIP-SURROUND-2M**  
8031414881802

colour temp.



RGB

light source SMD 5050  
watt/m 3W  
led/m 60

**Material**  
kapton with  
silicone cover

**Colour temperature**  
RGB



# FLEX24V 10X10



EASY DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.  
5 meters roll extra flexible led line in silicone.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
silicone

**Temperatura colore**  
3000K / 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
silicone


**Colour temperature**  
3000K / 4000K




**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>FLEX24V-10X10-12C</b> 8031414925711	
lumen/m	1140 lm
total lumen	5700 lm
<b>FLEX24V-10X10-12M</b> 8031414925728	
lumen/m	1200 lm
total lumen	6000 lm
light source	SMD 2835
watt/m	12W
led/m	120

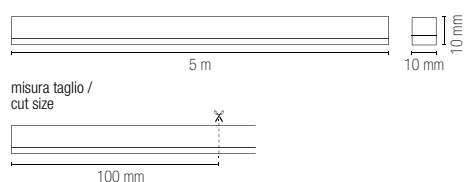


Accessori non inclusi / Not included accessories

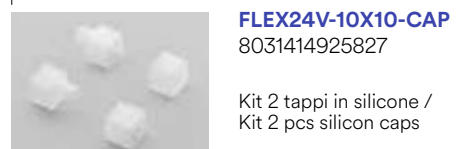

**FLEX24V-10X10-CAP**  
8031414925827


Kit 2 tappi in silicone /  
Kit 2 pcs silicon caps

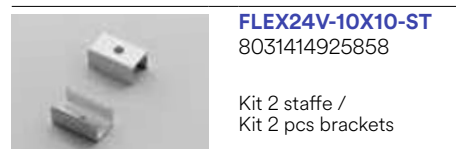

**FLEX24V-10X10-ST**  
8031414925858

Kit 2 staffe /  
Kit 2 pcs brackets

# FLEX24V 6X6

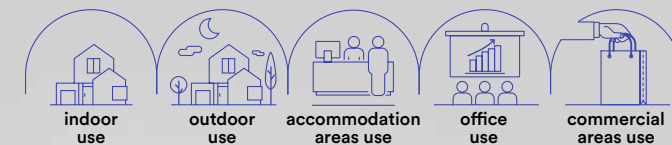

EASY DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.  
5 meters roll extra flexible led line in silicone.



Driver p. 843-852  
Controller p. 854-857



**Materiale**  
silicone

**Temperatura colore**  
3000K / 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
silicone


**Colour temperature**  
3000K / 4000K



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off

	colour temp.
<b>FLEX24V-6X6-12C</b> 8031414925735	
lumen/m	1140 lm
total lumen	5700 lm
<b>FLEX24V-6X6-12M</b> 8031414925742	
lumen/m	1140 lm
total lumen	5700 lm
light source	SMD 2835
watt/m	4,8W
led/m	120

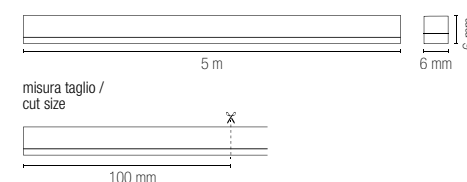

Accessori non inclusi / Not included accessories



**FLEX24V-6X6-CAP**  
8031414925834

Kit 2 tappi in silicone /  
Kit 2 pcs silicon caps



**FLEX24V-6X6-ST**  
8031414925865

Kit 2 staffe /  
Kit 2 pcs brackets

# FLEX24V 6X13



EASY DOMOTICA

**Rotolo 5 metri striscia led ultraflessibile in silicone.**  
5 meters roll extra flexible led line in silicone.


CE, EMC, Driver p. 843-852, Controller p. 854-857




- Materiale**  
silicone
- Temperatura colore**  
3000K / 4000K  
BLU/ROSSO/VERDE/ROSA/YELLOW
- Driver**  
DC24V (8,3A)  
tensione costante  
non incluso
- Durata e on/off**  
25.000h  
>15.000 on/off
- Material**  
silicone
- Colour temperature**  
3000K / 4000K  
BLUE/RED/GREEN/PINK/YELLOW
- Driver**  
DC24V (8,3A)  
constant voltage  
not included
- Durata e on/off**  
25.000h  
>15.000 on/off


	colour temp.	colour temp.
<b>FLEX24V-6X13-12C</b> 8031414925759	1140	blue
lumen/m	5700	
total lumen		
<b>FLEX24V-6X13-12M</b> 8031414925766	1200	red
lumen/m	6000	
total lumen		
<b>FLEX24V-6X13-12B</b> 8031414925773		green
lumen		
<b>FLEX24V-6X13-12R</b> 8031414925780		pink
lumen		
<b>FLEX24V-6X13-12G</b> 8031414925797		yellow
lumen		
<b>FLEX24V-6X13-12P</b> 8031414925803		
lumen		
<b>FLEX24V-6X13-12Y</b> 8031414925810		
lumen		

light source	SMD 2835
watt/m	12W
led/m	120

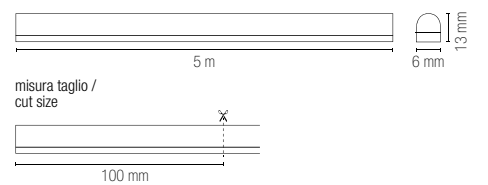

**Accessori non inclusi / Not included accessories**

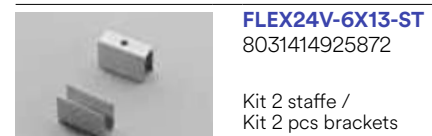

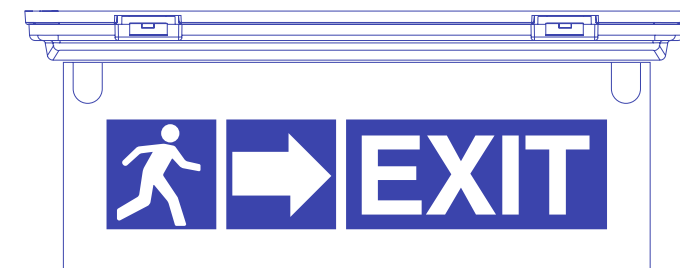


LAMPADE D'EMERGENZA  
EMERGENCY LAMPS

# HUBLLOT HELP

Plafoniera LED in policarbonato bianca con batteria Ni-Cd con durata fino a 12H e funzione d'emergenza combinata e permanente.

White polycarbonate LED ceiling light with Ni-Cd battery with 12H dino duration and emergency function mantain or non-mantain.

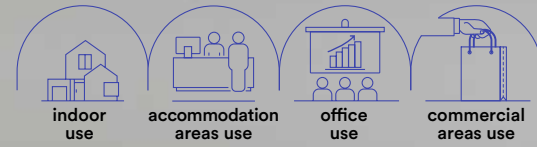

technical information **HUBLLOT HELP**



**Materiale**  
PC + PC

**Colore**  
bianco



**Temperatura colore**  
3000K / 4000K / 6500K



**Driver**  
integrato

**Material**  
PC + PC

**Colour**  
white



**Colour temperature**  
3000K / 4000K / 6500K



**Driver**  
built-in



**LED-HUBLLOT-HELP**  
8031414920488



lumen 1800 lm

emergency light 2W - 200 lm

watt 18W

beam angle 120°

pf 0.90




**Ni-Cd 6V 1800 mAh**

Batteria per emergenza inclusa /  
Included emergency battery




Fotometria del prodotto / Photometric curve




LED-HUBLLOT-HELP

Funzione MAINTAIN sempre accesa /  
MAINTAIN function always on

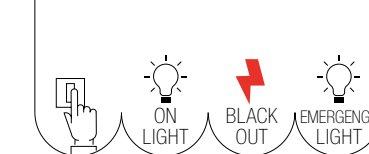


Funzione NON-MAINTAIN emergenza /  
NON-MAINTAIN function only emergency

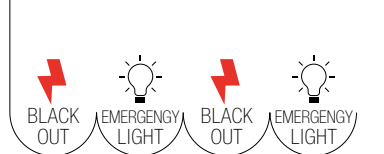


# HELP INC

**Incasso a LED emergenza in policarbonato bianco.**  
Emergency LED installation in white polycarbonate.

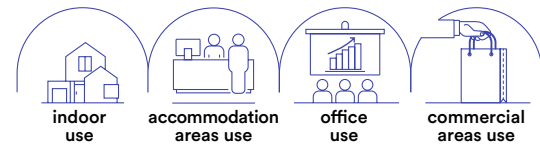


- Materiale**  
policarbonato
- Colore**  
bianco
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
polycarbonate
- Colour**  
white
- Colour temperature**  
4000K
- Driver**  
included



**Angolo di luce per open space /  
Open space beam angle**

	colour temp.	colour
<b>INC-HELP-R37</b> 8031414882786 lumen	●	●
	130 lm	


watt	1,2W
beam angle	140°
Ø	32 mm



**LiFePO4 3.2V 1000mAh**  
Batteria per emergenza inclusa /  
Included emergency battery




Fotometria del prodotto / Photometric curve



# HELP TRACK

**Lampade di emergenza LED per sistema binario trifase nei colori bianco o nero.**  
LED emergency lamps for three-phase rail system in white or black.

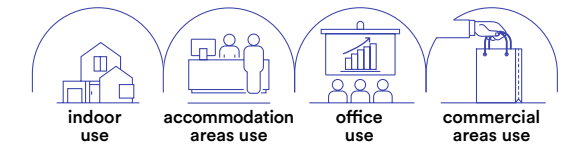


- Materiale**  
policarbonato
- Colore**  
bianco  
nero
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
polycarbonate
- Colour**  
white  
black
- Colour temperature**  
4000K
- Driver**  
included



	colour temp.	colour
<b>LED-HELP-W-TRACK</b> 8031414884179 lumen	●	●
	250 lm	
<b>LED-HELP-B-TRACK</b> 8031414884162 lumen	●	●
	250 lm	

watt	2W
beam angle	140°




**LiFePO4 3.2V 3200mAh**  
Batteria per emergenza inclusa /  
Included emergency battery



# HELP EXIT

Lampada a LED di emergenza multiuso:  
plafoniera, incasso ed incasso più bandiera.

Multipurpose emergency LED lamp:  
ceiling lamps, recessed light and recessed with flag.

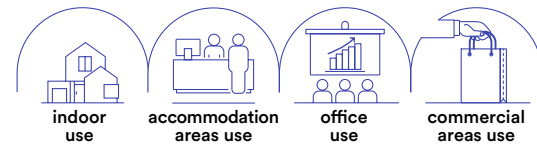

**Materiale**  
PC

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
PC

**Colour**  
white

**Colour temperature**  
4000K

**Driver**  
built-in



**LED-HELP-EXIT**  
8031414876310  
lumen


colour temp. | colour  
400 lm

emergency light 3 h - 400 lm  
watt 4W

**2 x 7.4V 1.8Ah Li-ion**  
Batteria per emergenza inclusa /  
Included emergency battery



Incluso adesivi /  
With stickers kit



## Accessori / Accessories



**HELP-EXIT-KIT**  
8031414876327

Kit incasso cornice e molle /  
Kit recessed with frame and spring




**HELP-EXIT-FLAG**  
8031414877331


Kit bandiera incluso adesivi /  
Emergency flag with stickers kit



**Funzione MAINTAIN**  
sempre accesa /  
MAINTAIN  
function always on




**Funzione NON-MAINTAIN**  
emergenza /  
NON-MAINTAIN function  
only emergency



# HELP 511

Lampada di emergenza LED in policarbonato con  
batteria Li-on, incasso con cassetta di derivazione 511.

Emergency LED lamp in PC with  
Li-on battery; fit with recess box 511.

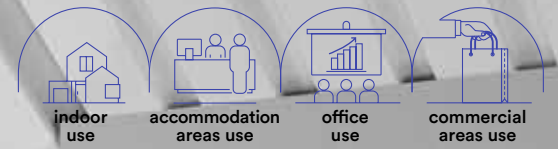

**Materiale**  
policarbonato

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
polycarbonate

**Colour**  
white

**Colour temperature**  
4000K


**Driver**  
built-in



**LED-HELP-511**  
8031414862566  
lumen

colour temp. | colour  
80 lm

emergency light 3 h - 180 lm  
watt 4W  
beam angle 100°  
275 x 95 x 35 mm



## Accessori inclusi / Included accessories

Scatola derivazione /  
Recess box hole




Adesivo /  
Stickers



**Li-ion 7.4V 1200mA**  
Batteria per emergenza inclusa /  
Included emergency battery



# HELP 503

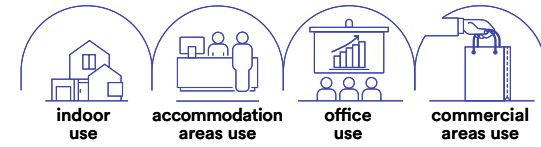

# BOLT HELP



**Materiale**  
polycarbonato

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
polycarbonate


**Colour**  
white

**Colour temperature**  
4000K


**Driver**  
built-in

Lampada di emergenza LED in polycarbonato con batteria Li-on incasso con cassetta di derivazione 503.


Emergency LED lamp in PC with Li-on battery; fit with recess box 503.



	colour temp.	colour
<b>LED-HELP-503</b> 8031414862573 lumen		
	80 lm	
emergency light	3 h - 80 lm	
watt		1W
beam angle		120°
	90 x 55 x 31 mm	



scatola derivazione 503  
503 junction box  
non inclusa / not included



**Li-ion 3,7V 700 mAh**  
Batteria per emergenza inclusa /  
Included emergency battery



**Materiale**  
polycarbonato  
+ acciaio

**Colore**  
bianco  
nikel

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
polycarbonate  
+ stainless steel

**Colour**  
white  
nikel

**Colour temperature**  
4000K


**Driver**  
built-in

Incasso segnapassi in polycarbonato con alloggiamento in cassetta di derivazione 503 con placchetta intercambiabile bianco o nikel in alluminio per funzione di emergenza combinata e permanente.


Downlight in polycarbonate for recessed box 503 built-in-LED with replaceable in aluminum buckle white or nikel finish and double emergency function maintain or non-maintain.



	colour temp.	colour
<b>INC-BOLT-503HP</b> 8031414866243 lumen		
	200 lm	
emergency light	3 h - 150 lm	
watt		3W
	Ø 32 mm	




scatola derivazione 503  
503 junction box  
non inclusa / not included




**Li-ion 3,7V 700 mAh**  
Batteria per emergenza inclusa /  
Included emergency battery




**Accessori inclusi /  
Included accessories**



**Funzione MAINTAIN  
sempre accesa /  
MAINTAIN  
function always on**




**Funzione NON-MAINTAIN  
emergenza /  
NON-MAINTAIN function  
only emergency**






# OUTDOOR

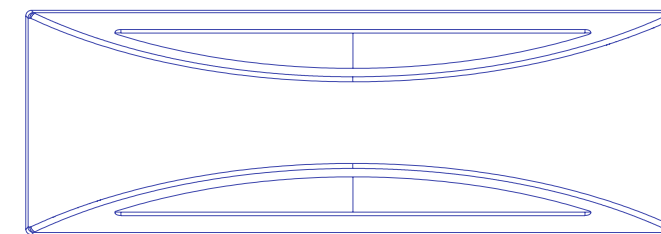

APPLIQUE  
WALL LAMPS

# COMPACT

Applique a LED in alluminio colore antracite con diffusore in policarbonato.  
Anthracite aluminum LED wall lamp and PC diffuser.

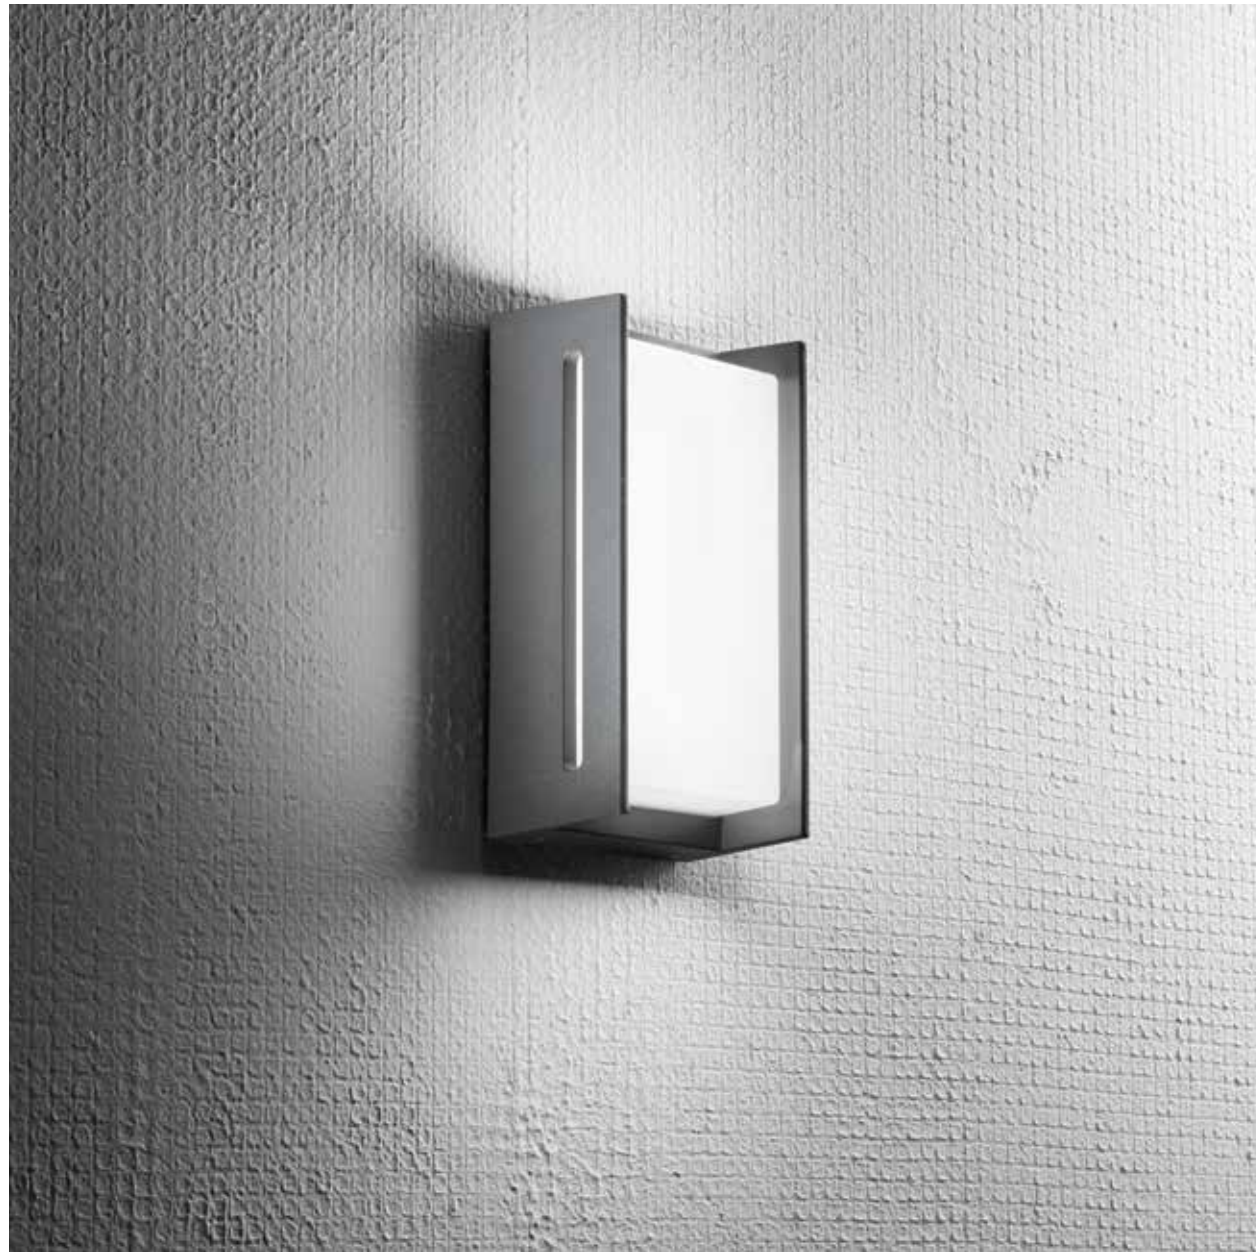

**Materiale**  
alluminio +  
policarbonato

**Colore**  
antracite



**Temperatura colore  
selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum +  
polycarbonate

**Colour**  
anthracite



**Selectable color  
temperature**  
3000K / 4000K



**Driver**  
included



**LED-W-COMPACT**

8031414867110


lumen

colour temp.



2260 lm

watt 18W  
beam angle 120°



# DETROIT

Applique a LED in alluminio nero diffusore in policarbonato.  
Aluminum LED wall lamp black finish with PC shade.



**Materiale**  
alluminio +  
policarbonato

**Colore**  
nero



**Temperatura colore  
selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum +  
polycarbonate

**Colour**  
black



**Selectable color  
temperature**  
3000K / 4000K



**Driver**  
included



**LED-W-DETROIT-AP**

8031414862290


lumen

colour temp.



700 lm

watt 10W  
beam angle 120°



Applique a LED in policarbonato nei colori bianco e nero.  
LED polycarbonate wall lamp in black and white.

**Materiale**  
PC

**Colore**  
bianco  
nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
PC


**Colour**  
white  
black




**Selectable color temperature**  
3000K / 4000K




**Driver**  
built-in



technical information **ZODIAC**

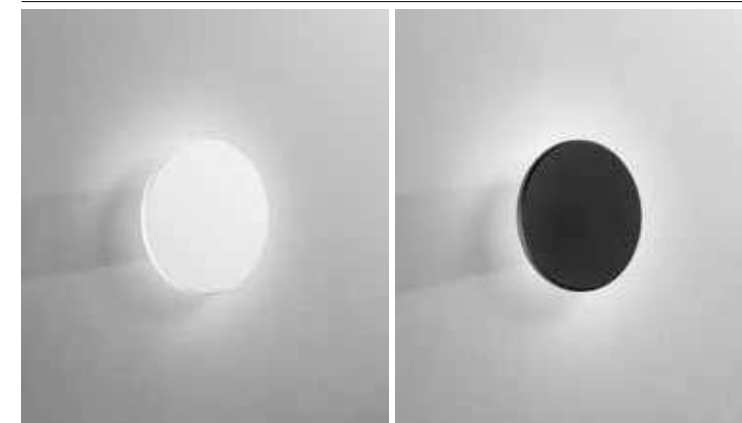

	colour temp.	colour	
<b>LED-W-ZODIAC-M-BCO</b> 8031414889846			
lumen	1550 lm		
<b>LED-W-ZODIAC-M-NER</b> 8031414889853			
lumen	1550 lm		
watt			12W
beam angle			360°

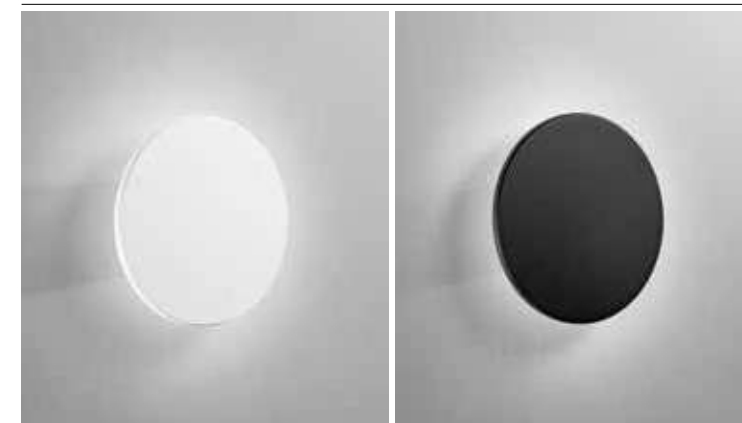

	colour temp.	colour	
<b>LED-W-ZODIAC-L-BCO</b> 8031414889860			
lumen	2450 lm		
<b>LED-W-ZODIAC-L-NER</b> 8031414889877			
lumen	2450 lm		
watt			18W
beam angle			360°

# STEALTH

Applique a LED in alluminio gofrato bianco o nero.  
Aluminum LED wall lamp embossed white or black.



technical information **STEALTH**



**Materiale**  
alluminio

**Material**  
aluminium

**Colore**  
gofrato bianco  
gofrato nero

**Colour**  
embossed white  
embossed black



**Temperatura colore**  
4000K

**Colour temperature**  
4000K




**Temperatura colore selezionabile**  
3000K / 4000K

**Selectable color temperature**  
3000K / 4000K



**Driver**  
incluso



**Driver**  
included

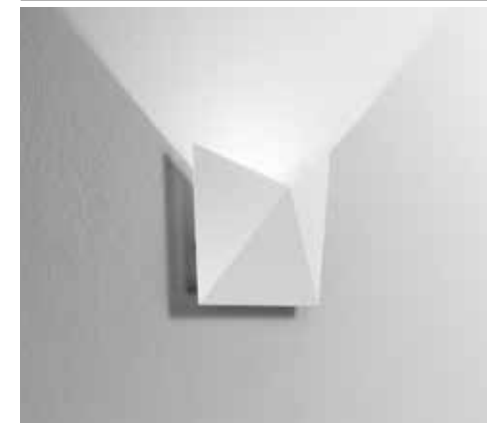

**LED-W-STEALTH BCO**  
8031414866960  
lumen 580 lm

colour temp.	colour


watt 6W  
beam angle 120°

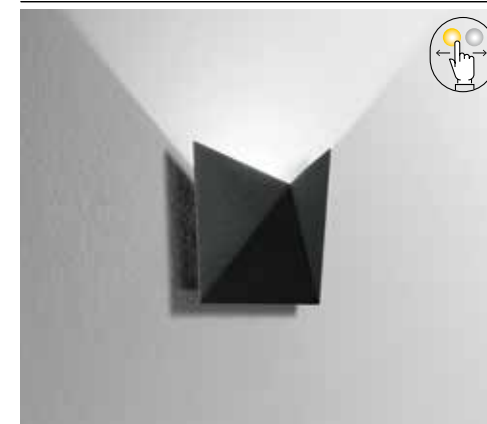

**LED-W-STEALTH NER**  
8031414866953  
lumen 580 lm

colour temp.	colour

watt 6W  
beam angle 120°



# MIURA

Applique a LED in alluminio bianco goffrato ultrasottile.  
Ultra-thin embossed white aluminum LED wall light.



**Materiale**  
alluminio

**Material**  
aluminium

**Colore**  
goffrato bianco

**Colour**  
embossed white

**Temperatura colore selezionabile**  
3000K / 4000K

**Selectable color temperature**  
3000K / 4000K



**Driver**  
incluso

**Driver**  
included




**LED-W-MIURA/6W**

8031440351447

lumen

colour temp.	colour
520 lm	

watt	2 x 3W
beam angle	↓ 110° + 110° ↑



# GAMMA

Applique a LED in alluminio goffrato bianco.  
Aluminum LED wall lamp embossed white finish.



**Materiale**  
alluminio

**Material**  
aluminum

**Colore**  
goffrato bianco

**Colour**  
embossed white

**Temperatura colore selezionabile**  
3000K / 4000K

**Selectable color temperature**  
3000K / 4000K



**Driver**  
incluso

**Driver**  
included




**LED-W-GAMMA/10W**

8031434041217

lumen


colour temp.	colour
1100 lm	

watt	2 x 5W
beam angle	↓ 120° + 120° ↑



# VEYRON

Applique a LED in alluminio con doppia emissione bianco o nero gofrato.  
LED aluminum wall light with double emission in white or black.

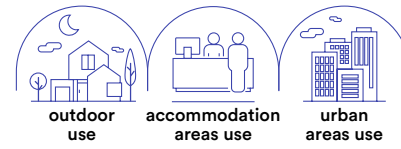

technical information **VEYRON**



- Materiale**  
alluminio

---

- Colore**  
gofrato bianco  
gofrato nero
- 

---

- Temperatura colore selezionabile**  
3000K / 4000K
- 

---

- Driver**  
incluso

---

- Material**  
aluminum

---

- Colour**  
embossed white  
embossed black
- 

---

- Selectable color temperature**  
3000K / 4000K
- 

---

- Driver**  
included



	colour temp.	<input type="radio"/> <input type="radio"/>
	colour	<input type="radio"/> <input type="radio"/>
<b>LED-W-VEYRON BCO</b> 8031440361163		
lumen		840 lm
watt		2 x 3,5W
beam angle		↓ 120° + 120° ↑

	colour temp.	<input type="radio"/> <input type="radio"/> <input type="radio"/>
	colour	<input type="radio"/> <input type="radio"/> <input type="radio"/>
<b>LED-W-VEYRON NERO</b> 8031440361095		
lumen		840 lm
watt		2 x 3,5W
beam angle		↓ 120° + 120° ↑

# BIOME

Applique a LED in alluminio bianco o nero goffrato.  
LED aluminum wall lamps in embossed white or black.




technical information **BIOME**




- Materiale**  
alluminio
- Colore**  
goffrato bianco  
goffrato nero
- Temperatura colore**  
4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
embossed white  
embossed black
- Colour temperature**  
4000K
- Driver**  
included



	colour temp.	colour
lumen	900 lm	
watt	2 x 3,5W	
beam angle	↓ 120° + 120° ↑	




	colour temp.	colour
lumen	900 lm	
watt	2 x 3,5W	
beam angle	↓ 120° + 120° ↑	



# GOLF

Applique a LED in alluminio gofrato bianco o nero.  
Aluminum LED wall lamp embossed white or black finish.



technical information **GOLF**



**Materiale**  
alluminio

**Colore**  
gofrato bianco  
gofrato nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
embossed white  
embossed black



**Selectable color temperature**  
3000K / 4000K




**Driver**  
included




**LED-W-GOLF BCO**  
8031440361101  
lumen 840 lm

watt 2 x 3,5W  
beam angle ↓ 120° + 120° ↑



**LED-W-GOLF NERO**  
8031440361118  
lumen 840 lm

watt 2 x 3,5W  
beam angle ↓ 120° + 120° ↑






# POLO

Applique a LED in policarbonato con singola o doppia emissione bianco o nero opaco.

Polycarbonate LED wall light with single or double emission in matt white or black.

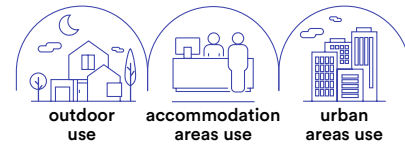

technical information **POLO**



**Materiale**  
PC

**Colore**  
bianco  
nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
PC


**Colour**  
white  
black





**Selectable color temperature**  
3000K / 4000K





**Driver**  
included

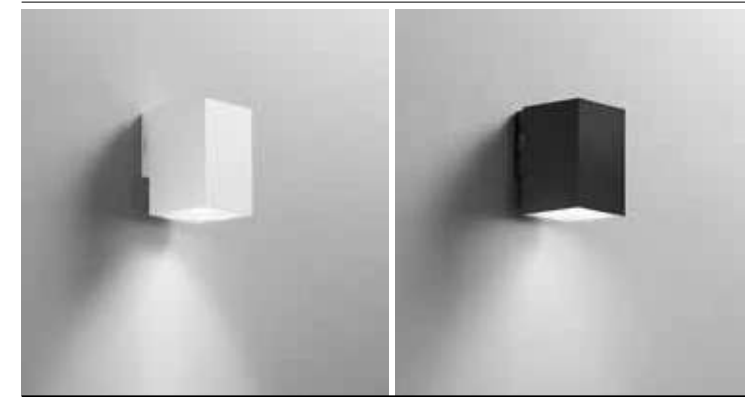


	colour temp.	colour
<b>LED-W-POLO-Q1-BCO</b> 8031414889655		
lumen	980 lm	
<b>LED-W-POLO-Q1-NER</b> 8031414889662		
lumen	980 lm	
watt	8W	
beam angle	60°	

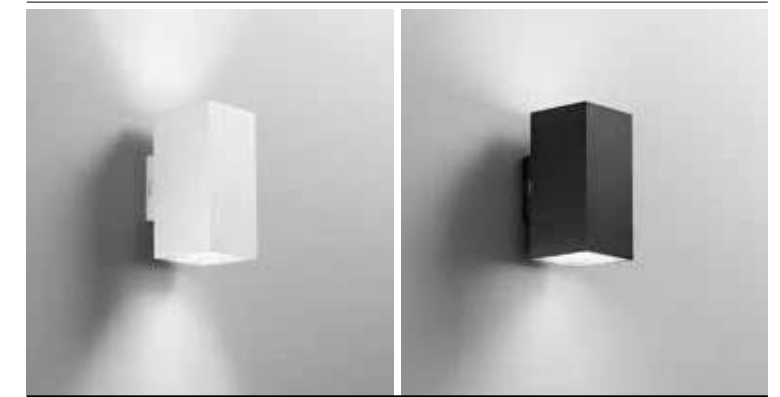


	colour temp.	colour
<b>LED-W-POLO-Q2-BCO</b> 8031414889679		
lumen	1960 lm	
<b>LED-W-POLO-Q2-NER</b> 8031414889686		
lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	

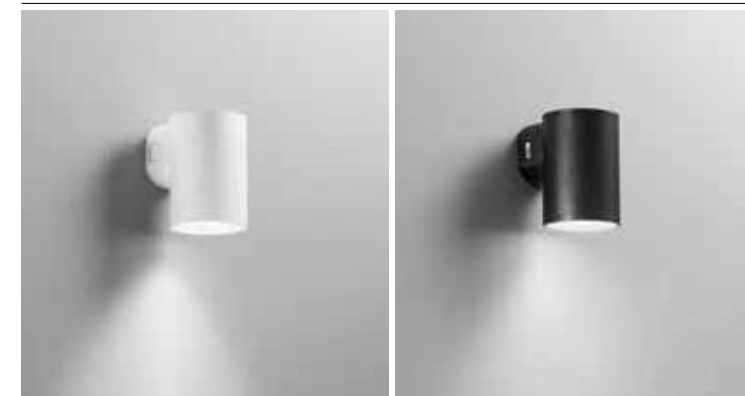

	colour temp.	colour
<b>LED-W-POLO-R1-BCO</b> 8031414889617		
lumen	980 lm	
<b>LED-W-POLO-R1-NER</b> 8031414889624		
lumen	980 lm	
watt	8W	
beam angle	60°	



	colour temp.	colour
<b>LED-W-POLO-R2-BCO</b> 8031414889631		
lumen	1960 lm	
<b>LED-W-POLO-R2-NER</b> 8031414889648		
lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



OUTDOOR APPLIQUE / WALL LAMPS

In.tec light

# RAY

**Appliche a LED in alluminio biemissione più emissione frontale in antracite o corten gofrato.**  
Aluminum LED wall lamp double emission light and front light stream embossed anthracite or corten finish.



technical information **RAY**




- Materiale**  
alluminio
- Colore**  
gofrato antracite  
gofrato corten
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
embossed anthracite  
embossed corten
- Selectable color temperature**  
3000K / 4000K
- Driver**  
included




**LED-W-RAY ANT**  
8031414867127  
lumen 1100+390 lm

watt 14W  
beam angle ↓ 50° + 50° ↑ + 120° →




**LED-W-RAY BRO**  
8031414870998  
lumen 1100+390 lm

watt 14W  
beam angle ↓ 50° + 50° ↑ + 120° →



# TWIN

Applique a LED in alluminio finitura bianco, antracite o nikel spazzolato.  
Aluminum LED wall lamp in white, anthracite finish or brush nickel.

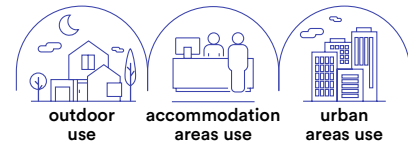

collection TWIN



**Materiale**  
alluminio

**Colore**  
bianco  
antracite  
nikel spazzolato

**Temperatura colore**  
4000K

**Temperatura colore selezionabile**  
3000K / 4000K

**Driver**  
incluso

**Material**  
aluminum

**Colour**  
white  
anthracite  
brush nikel

**Colour temperature**  
4000K


**Selectable color temperature**  
3000K / 4000K

**Driver**  
included





	colour temp.	colour
<b>LED-W-TWIN-S BCO</b> 8031414863976 lumen	1500 lm	
<b>LED-W-TWIN-S ANT</b> 8031414863709 lumen	1500 lm	
<b>LED-W-TWIN-S NIK</b> 8031414863983 lumen	1560 lm	

watt 12W  
beam angle ↓ 90° + 90° ↑




	colour temp.	colour
<b>LED-W-TWIN-M BCO</b> 8031414863969 lumen	2150 lm	
<b>LED-W-TWIN-M ANT</b> 8031414863693 lumen	2150 lm	
<b>LED-W-TWIN-M NIK</b> 8031414863990 lumen	2150 lm	

watt 20W  
beam angle ↓ 90° + 90° ↑

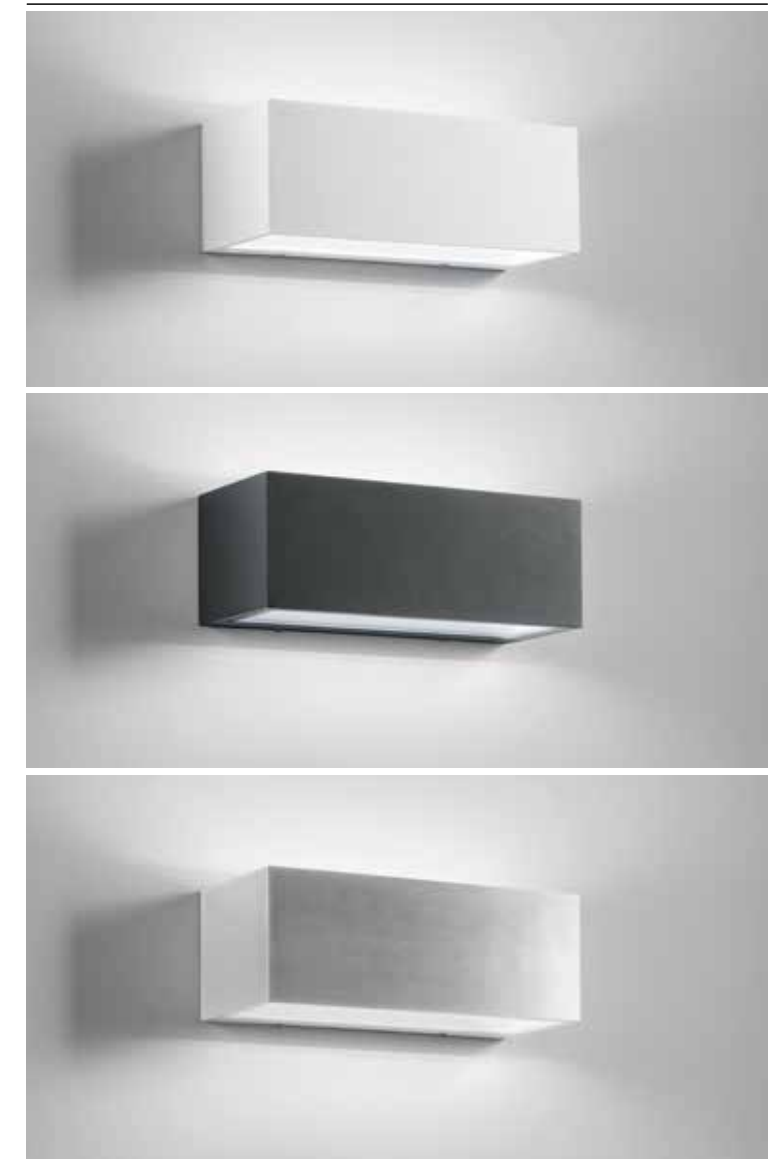

	colour temp.	colour
<b>LED-W-TWIN-XL BCO</b> 8031414863716 lumen	4440 lm	
<b>LED-W-TWIN-XL ANT</b> 8031414863686 lumen	4440 lm	
<b>LED-W-TWIN-XL NIK</b> 8031414864362 lumen	4440 lm	

watt 40W  
beam angle ↓ 90° + 90° ↑



# DESERT

Applique a LED in alluminio con biemissione, emissione frontale con finitura bianco, antracite e bronzo.  
LED aluminum wall lamp with double emission, frontal emission with white, anthracite and bronze finish.



technical information **DESERT**



**Materiale**  
alluminio

**Colore**  
goffrato bianco  
goffrato antracite  
goffrato corten



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum


**Colour**  
embossed white  
embossed anthracite  
embossed corten



**Colour temperature**  
3000K / 4000K




**Driver**  
included

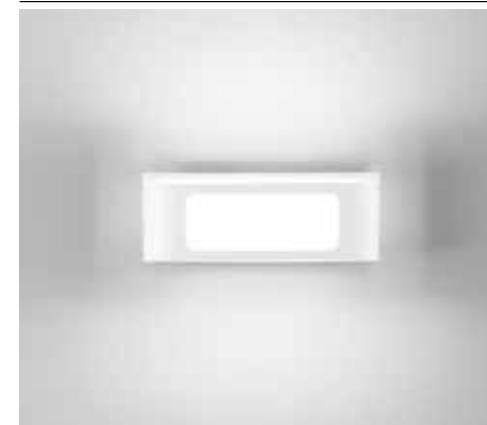


**LED-W-DESERT-BCO**  
8031414922895  
lumen

colour temp. | colour




580 lm

watt 12W  
beam angle 120°




**LED-W-DESERT-ANT**  
8031414922918  
lumen

colour temp. | colour




580 lm

watt 12W  
beam angle 120°




**LED-W-DESERT-BRO**  
8031414922901  
lumen

colour temp. | colour



580 lm

watt 12W  
beam angle 120°



# DUKROT

Applique in alluminio con diffusore in policarbonato.  
Disponibile in bianco opaco, antracite e corten.  
Aluminum wall lamp with polycarbonate diffuser  
Available in matte white, anthracite and corten.



technical information **DUKROT**



**Materiale**  
alluminio

**Colore**  
bianco opaco  
antracite  
corten



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminum

**Colour**  
matt white  
anthracite  
corten



**Selectable color temperature**  
3000K / 4000K





**Driver**  
built-in



**LED-W-DUKROT-BCO**  
8031414918591  
lumen

colour temp.	colour
1440 lm	


watt	12W
beam angle	180°

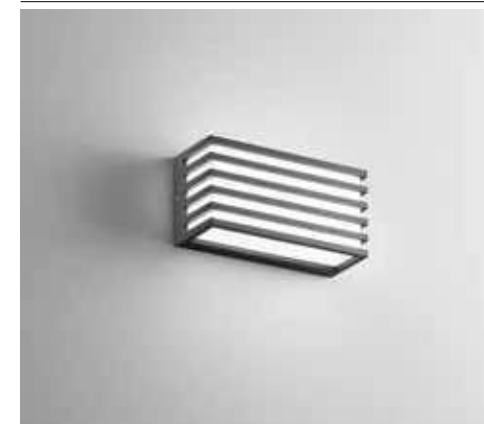

**LED-W-DUKROT-ANT**  
8031414918584  
lumen

colour temp.	colour
1440 lm	


watt	12W
beam angle	180°



**LED-W-DUKROT-BRO**  
8031414918607  
lumen


colour temp.	colour
1440 lm	

watt	12W
beam angle	180°




# WEISS

Applique a LED in alluminio con finitura bianco, nero o corten.  
Aluminum LED wall light in white, black and corten finish.



technical information **WEISS**

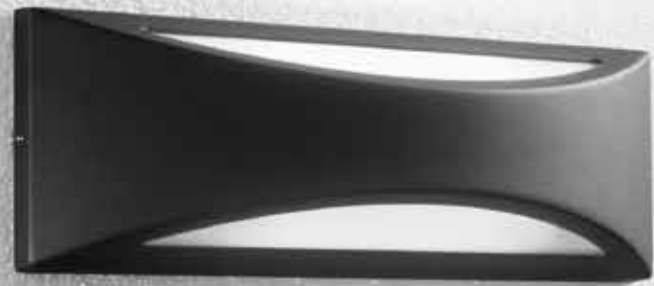

**Materiale**  
alluminio

**Colore**  
bianco  
nero  
corten



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminum

**Colour**  
white  
black  
corten



**Selectable color temperature**  
3000K / 4000K




**Driver**  
built-in



**LED-W-WEISS-BCO**  
8031414897193  
lumen

colour temp.	colour
1800 lm	


watt 16W  
beam angle ↓ 120° + 120° ↑



**LED-W-WEISS-NER**  
8031414897216  
lumen

colour temp.	colour
1800 lm	


watt 16W  
beam angle ↓ 120° + 120° ↑



**LED-W-WEISS-BRO**  
8031414897209  
lumen

colour temp.	colour
1800 lm	


watt 16W  
beam angle ↓ 120° + 120° ↑



# BORDER

Applique angolare a LED con struttura e diffusore in policarbonato e finitura bianco o nero opaco.

Angular LED wall lamp with structure and diffuser in PC and matt white and black finish.

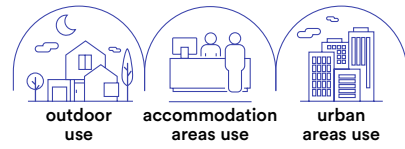


technical information **BORDER**




- Materiale**  
PC
- Colore**  
bianco opaco  
nero opaco
- Temperatura colore**  
3000K / 4000K
- Driver**  
incluso
- Material**  
PC
- Colour**  
matt white  
matt black
- Colour temperature**  
3000K / 4000K
- Driver**  
included



<b>LED-BORDER-30M-BCO</b> 8031414883578	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	




<b>LED-BORDER-30M-ANT</b> 8031414883561	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	





**Applique angolare a LED con struttura e diffusore in alluminio e finitura bianco gofrato.**

Angular LED wall lamp with structure and diffuser in aluminum and embossed white and black finish.

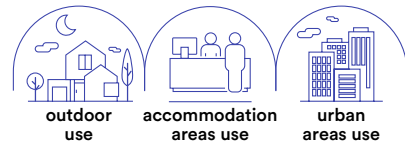

**Materiale**  
alluminio

**Colore**  
gofrato bianco  
gofrato nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
embossed white  
embossed black







**Selectable color temperature**  
3000K / 4000K







**Driver**  
included



	colour temp.	colour
<b>LED-W-LUXON BCO</b> 8031414870677	  	
lumen	1550 lm	
watt	12W	
beam angle	120°	



	colour temp.	colour
<b>LED-W-LUXON ANT</b> 8031414867097	  	
lumen	1550 lm	
watt	12W	
beam angle	120°	



# GRIS

Applique a LED in alluminio con finitura bianco o nera.  
LED wall light in aluminum with white or black finish.



technical information **GRIS**



**Materiale**  
alluminio

**Colore**  
bianco  
nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminum

**Colour**  
white  
black



**Selectable color temperature**  
3000K / 4000K



**Driver**  
built-in



**LED-W-GRIS-BCO**  
8031414897223

lumen

colour temp.




1390 lm

watt

12W

beam angle

180°



**LED-W-GRIS-NER**  
8031414897230

lumen

colour temp.




1390 lm

watt

12W

beam angle

180°



# AGERA

Applique a LED in alluminio goffrato nero.  
Aluminum LED wall lamp embossed black finish.





technical information **AGERA**




- Materiale**  
alluminio
- Colore**  
goffrato nero
- Temperatura colore**  
4000K
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
embossed black
- Colour temperature**  
4000K
- Selectable color temperature**  
3000K / 4000K
- Driver**  
included



	colour temp.	colour
<b>LED-W-AGERA-90</b> 8031440360951	<input type="radio"/>	<input type="radio"/>
lumen	700 lm	
watt	2 x 3W	
beam angle	↓ 120° + 120° ↑	

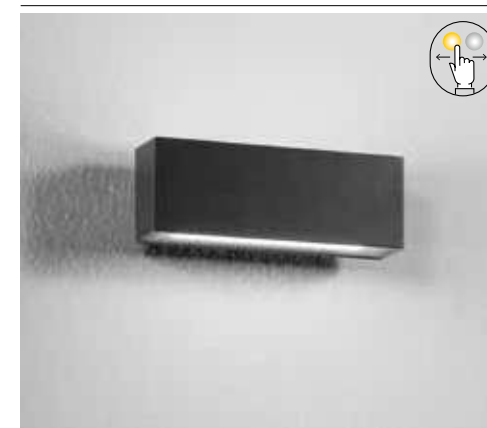


	colour temp.	colour
<b>LED-W-AGERA-180</b> 8031440360975	<input type="radio"/>	<input type="radio"/>
lumen	1380 lm	
watt	2 x 6W	
beam angle	↓ 120° + 120° ↑	



# BOXTER


Applique a LED in alluminio goffrato bianco, silver, nero o corten.  
Aluminum LED wall lamp embossed white, silver, black or corten finish.

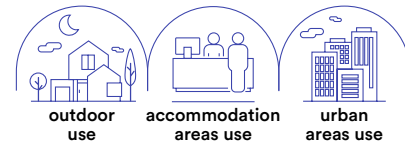

technical information **BOXTER**



- Materiale**  
alluminio
- Colore**  
bianco  
silver  
nero  
corten
- Temperatura colore**  
4000K
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
white  
silver  
black  
corten
- Colour temperature**  
4000K
- Selectable color temperature**  
3000K / 4000K
- Driver**  
included

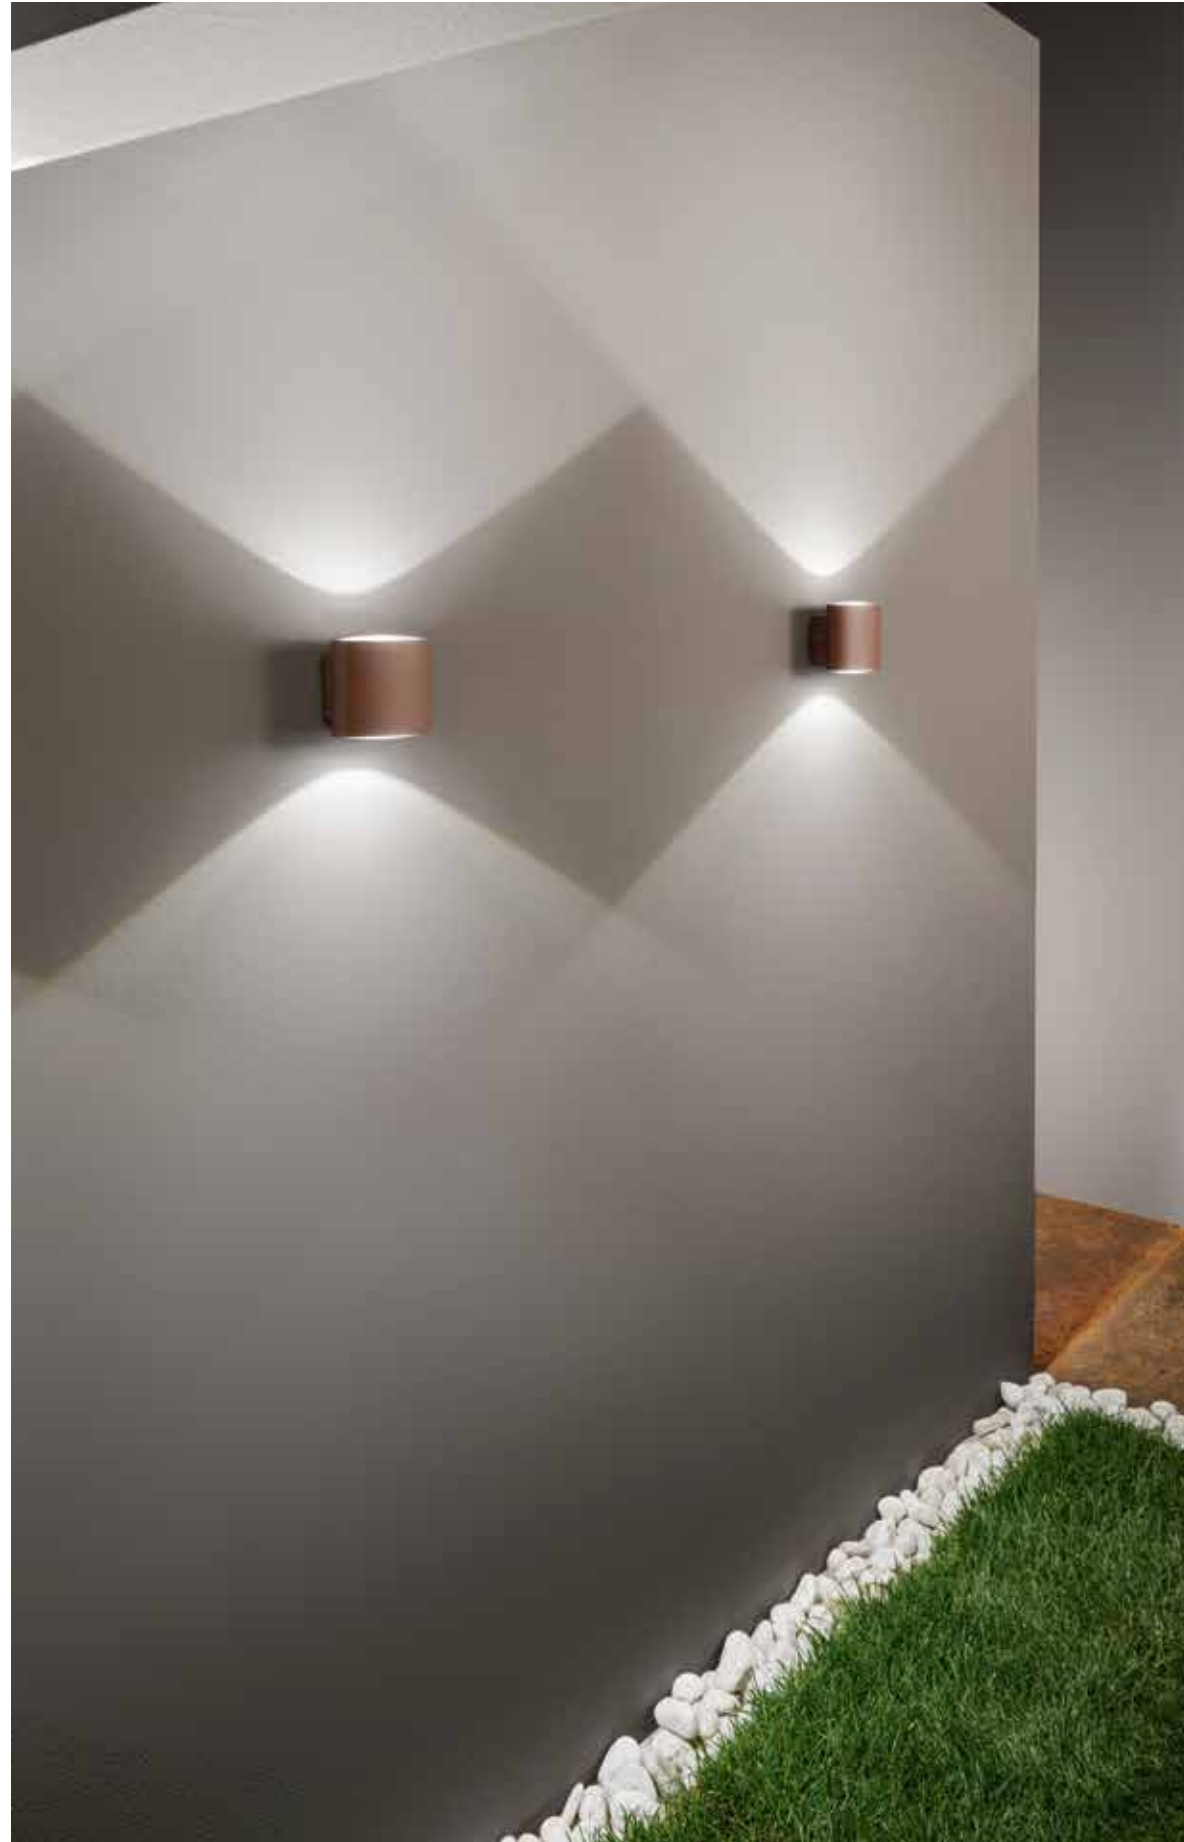

<b>LED-W-BOXTER BCO</b> 8031414873043	colour temp.	colour
	960 lm	
watt	2 x 4W	
beam angle	↓ 120° + 120° ↑	



<b>LED-W-BOXTER SIL</b> 8031414862399	colour temp.	colour
	800 lm	
watt	2 x 4W	
beam angle	↓ 120° + 120° ↑	



<b>LED-W-BOXTER NER</b> 8031414862382	colour temp.	colour
	960 lm	
watt	2 x 4W	
beam angle	↓ 120° + 120° ↑	



<b>LED-W-BOXTER BRO</b> 8031414862405	colour temp.	colour
	960 lm	
watt	2 x 4W	
beam angle	↓ 120° + 120° ↑	

# KLEIN

Applique a LED in policarbonato con biemissione nei colori bianco e nero.  
Polycarbonate LED wall light with biemissione in matt white or black.



technical information **KLEIN**



**Materiale**  
PC

**Colore**  
bianco opaco  
nero opaco



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
PC


**Colour**  
matt white  
matt black





**Colour temperature**  
3000K / 4000K




**Driver**  
built-in

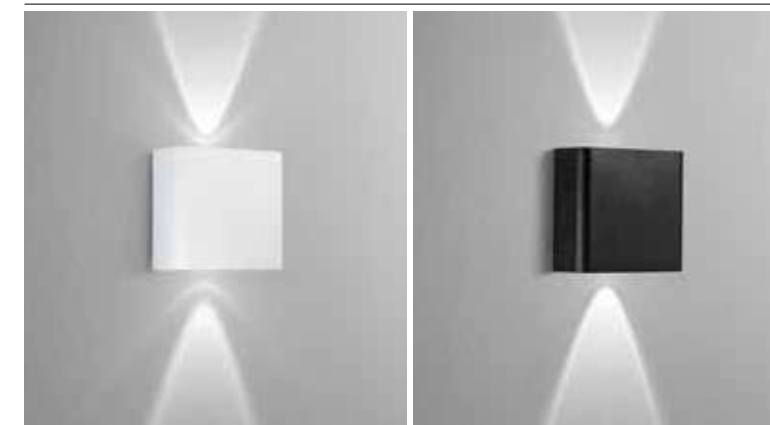

	colour temp.	colour
<b>LED-W-KLEIN-AP2-BCO</b> 8031414916337		
lumen	200 lm	
<b>LED-W-KLEIN-AP2-NER</b> 8031414916320		
lumen	200 lm	
watt	2W	
beam angle	60°	

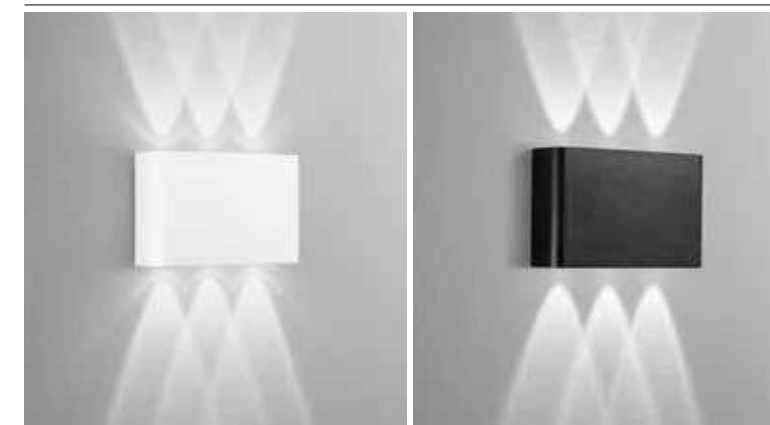


	colour temp.	colour
<b>LED-W-KLEIN-AP6-BCO</b> 8031414916351		
lumen	600 lm	
<b>LED-W-KLEIN-AP6-NER</b> 8031414916344		
lumen	600 lm	
watt	6W	
beam angle	60°	



In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS

# BEETLE

Applique a LED in alluminio bianco o antracite goffrato.  
Aluminum LED wall lamp embossed white or anthracite finish.

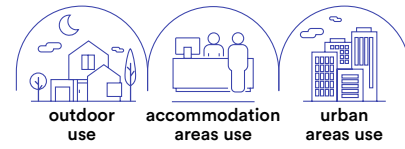

technical information **BEETLE**



**Materiale**  
alluminio

**Colore**  
goffrato bianco  
goffrato antracite



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
embossed white  
embossed anthracite




**Selectable color temperature**  
3000K / 4000K




**Driver**  
included




**LED-W-BEETLE BCO**  
8031414876952  
lumen 600 lm




watt 6W  
beam angle 100°



**LED-W-BEETLE GR**  
8031414876969  
lumen 600 lm



watt 6W  
beam angle 100°



# RIBBON



technical information **RIBBON**



**Materiale**  
alluminio

**Colore**  
goffrato antracite



**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
embossed anthracite



**Colour temperature**  
4000K




**Driver**  
included


**Fascia a LED in alluminio in antracite goffrato.**  
Aluminum LED applique in embossed anthracite finish.



	colour temp.	colour
<b>LED-RIBBON-42</b> 8031414882335		
lumen	1600 lm	
watt	2 x 6W	
beam angle	120°	




	colour temp.	colour
<b>LED-RIBBON-72</b> 8031414882342		
lumen	2600 lm	
watt	2 x 10W	
beam angle	120°	

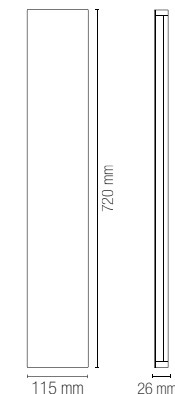

In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS

# LASER



technical information **LASER**



**Materiale**  
termoplastica

**Colore**  
antracite



**Temperatura colore**  
4000K



**Driver**  
incluso

**Material**  
thermoplastic

**Colour**  
anthracite



**Colour temperature**  
4000K




**Driver**  
included

**Applique a LED in termoplastica antracite.**  
LED wall lamp in thermoplastic anthracite.




	colour temp.	colour
<b>LED-LASER</b> 8031414882328		
lumen	170 lm	

watt	3W
beam angle	5°



	colour temp.	colour
<b>LED-LASER-BIS</b> 8031414882311		
lumen	40 lm	

watt	5W
beam angle	2 x 4°



In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS



# ALFA

Applique a LED in alluminio con  
paratie regolabili indipendenti.  
Aluminum LED wall lamp with  
independent adjustable wings.



**Materiale**  
alluminio

**Colore**  
goffrato bianco  
goffrato silver  
goffrato antracite  
goffrato corten



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
embossed white  
embossed silver  
embossed anthracite  
embossed corten



**Colour temperature**  
3000K / 4000K



**Driver**  
included

collection **ALFA**




In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS

- Materiale**  
alluminio
- Colore**  
goffrato bianco  
goffrato silver
- Temperatura colore**  
3000K / 4000K
- Driver**  
incluso
- Material**  
aluminum
- Colour**  
embossed white  
embossed silver
- Colour temperature**  
3000K / 4000K
- Driver**  
included




**LED-W-ALFA-10-BCO**  
8031414905843  
lumen 1200 lm

watt 2 x 5W  
beam angle ↓ 10°/120° + 10°/120° ↑




**LED-W-ALFA-10-GR**  
8031414905850  
lumen 1200 lm


watt 2 x 5W  
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /  
Bi-emission light with independent adjustable wings

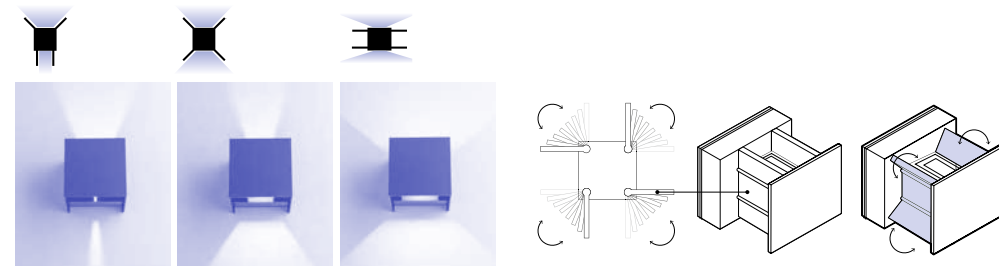

- Materiale**  
alluminio
- Colore**  
goffrato bianco  
goffrato antracite  
goffrato corten
- Temperatura colore**  
3000K / 4000K
- Driver**  
incluso

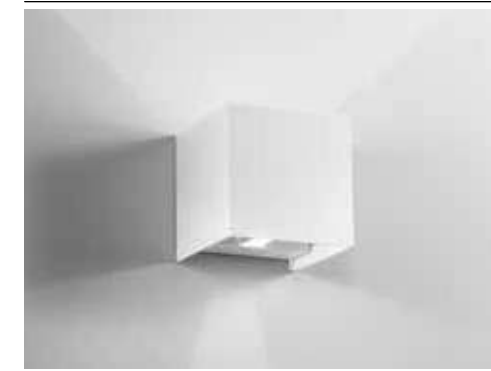

**LED-W-ALFA-20-BCO**  
8031414905867  
lumen 1800 lm

watt 20W  
beam angle ↓ 10°/120° + 10°/120° ↑



**LED-W-ALFA-20-ANT**  
8031414905874  
lumen 1800 lm

watt 20W  
beam angle ↓ 10°/120° + 10°/120° ↑




- Material**  
aluminum
- Colour**  
embossed white  
embossed anthracite  
embossed corten
- Colour temperature**  
3000K / 4000K
- Driver**  
included




**LED-W-ALFA-20-BRO**  
8031414905881  
lumen 1800 lm

watt 20W  
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /  
Bi-emission light with independent adjustable wings

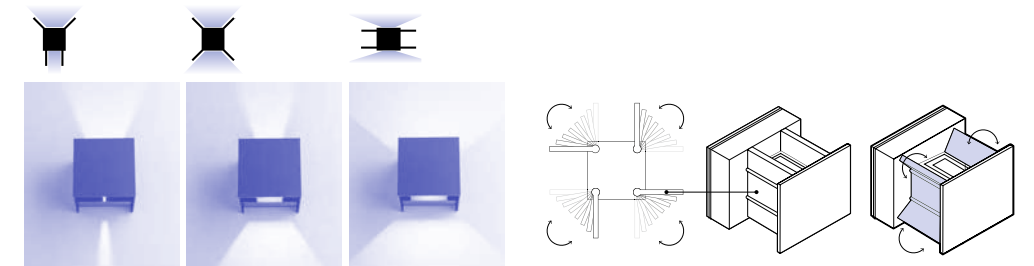

# DELTA

Applique a LED in alluminio bianco o silver gofrato con paratie regolabili indipendenti.

Aluminum LED wall lamp in embossed white or silver finish with independent adjustable wings.

**Materiale**  
alluminio

**Colore**  
gofrato bianco  
gofrato silver



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum


**Colour**  
embossed white  
embossed silver



**Colour temperature**  
3000K / 4000K



**Driver**  
included



technical information **DELTA**




**LED-W-DELTA-10-BCO**  
8031414905829  
lumen 700 lm

colour temp. | colour



watt 2 x 5W  
beam angle ↓ 10°/120° + 10°/120° ↑




**LED-W-DELTA-10-GR**  
8031414905836  
lumen 700 lm


colour temp. | colour



watt 2 x 5W  
beam angle ↓ 10°/120° + 10°/120° ↑




Luce biemissione con paratie regolabili indipendenti /  
Bi-emission light with independent adjustable wings

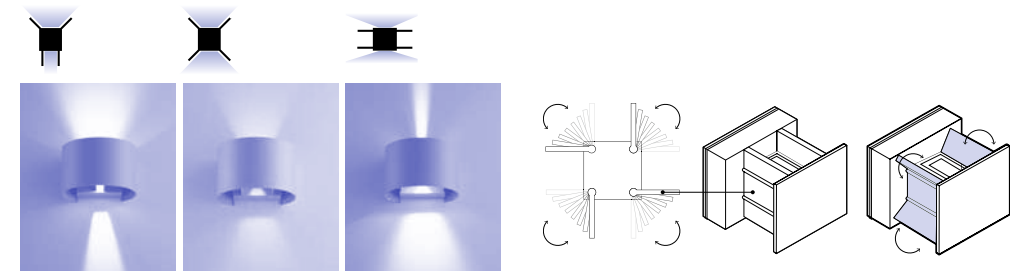

# PARKER

Applique a LED in cemento bianco o grigio naturale.  
LED wall lamp in natural white or grey concrete.

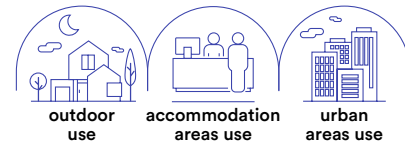

**Materiale**  
cemento

**Colore**  
bianco  
grigio



**Temperatura colore**  
4000K



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
incluso

**Material**  
concrete

**Colour**  
white  
grey



**Colour temperature**  
4000K



**Selectable color temperature**  
3000K / 4000K



**Driver**  
included



collection PARKER






**LED-PARKER-AP30**  
8031414864195  
lumen 1080 lm

colour temp. | colour  
● ● ●  
1080 lm

watt 9W  
beam angle ↓ 120° + 120° ↑




Connettore IP65 incluso / IP65 connector included



**LED-PARKER-AP40**  
8031414864201  
lumen 1400 lm

colour temp. | colour  
● ● ●  
1400 lm

watt 12W  
beam angle ↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



**LED-PARKER-AP60**  
8031414862504  
lumen 2400 lm

colour temp. | colour  
● ● ●  
2400 lm

watt 20W  
beam angle ↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



**LED-PARKER-AP120**  
8031414862511  
lumen 1500 lm

colour temp. | colour  
● ● ●  
1500 lm

watt 30W  
beam angle ↓ 120° + 120° ↑




Connettore IP65 incluso / IP65 connector included



**LED-PARKER-AP30 GR**  
8031414866977  
lumen 1080 lm

colour temp. | colour  
● ● ●  
1080 lm

watt 8,6W  
beam angle ↓ 120° + 120° ↑




Connettore IP65 incluso / IP65 connector included



**LED-PARKER-AP50 GR**  
8031414866984  
lumen 2000 lm

colour temp. | colour  
● ● ●  
2000 lm


watt 16,9W  
beam angle ↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included

# PORTLAND


**Applique cilindrico in cemento bianco.**  
Cylindrical wall lamp in white concrete.

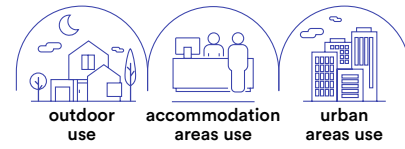

**I-PORTLAND-AP2 BCO**  
8031414863563

2 x GU10 MAX 35W

colour



Connettore IP65 incluso /  
IP65 connector included



Lampadina non inclusa /  
Light bulb not included

# OAKLAND


**Applique in cemento bianco.**  
Wall lamp in white concrete.



**I-OAKLAND-AP2 BCO**  
8031414864218

2 x GU10 MAX 10W

colour





Connettore IP65 incluso /  
IP65 connector included



Lampadina non inclusa /  
Light bulb not included

# JUMP


Applique in alluminio bianco, silver o in acciaio inox.  
Wall lamp aluminum white, silver finish or stainless steel.

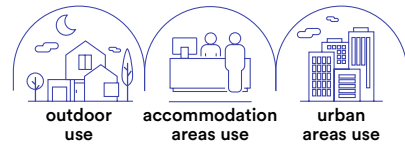

technical information **JUMP**




	colour
<b>I-JUMP-AP2 BCO</b> 8031414862351	
<b>I-JUMP-AP2 SIL</b> 8031414862344	
<b>I-JUMP-AP2 INOX</b> 8031414862368	



2 x GU10 MAX 35W



	colour
<b>I-JUMP-AP2-E27 SIL</b> 8031414865390	



2XE27 MAX 60W


OUTDOOR APPLIQUE / WALL LAMPS

In.tec light

# ONE

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.


Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.



technical information **ONE**



	colour	
<b>I-ONE-AP1 BCO</b> 8031414878857		
<b>I-ONE-AP1 ANT</b> 80314144073009		
<b>I-ONE-AP1 BRO</b> 8031414048861		
1 x GU10 MAX 35W		




OUTDOOR APPLIQUE / WALL LAMPS

In.tec light




	colour	
<b>I-ONE-AP2 BCO</b> 8031414878864		
<b>I-ONE-AP2 ANT</b> 8031414082100		
<b>I-ONE-AP2 BRO</b> 8031414079995		
2 x GU10 MAX 35W		





# QUBO

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.  
Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.



technical information **QUBO**



	colour	
<b>I-QUBO-AP1 BCO</b> 8031414878833		
<b>I-QUBO-AP1 ANT</b> 80314144084203		
<b>I-QUBO-AP1 BRO</b> 80314144082117		
1 x GU10 MAX 35W		



	colour	
<b>I-QUBO-AP2 BCO</b> 8031414878840		
<b>I-QUBO-AP2 ANT</b> 80314144084289		
<b>I-QUBO-AP2 BRO</b> 80314144083336		
2 x GU10 MAX 35W		





OUTDOOR APPLIQUE / WALL LAMPS

In.tec light

# TUCSON

Applique in alluminio bianco, silver o bronzo gofrato con diffusore in policarbonato.  
Aluminum wall lamp in embossed white, silver or bronze PC diffuser.

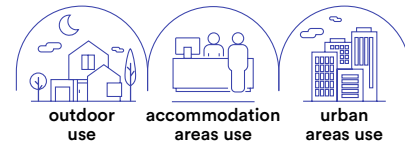

technical information **TUCSON**




**I-TUCSON-AP BCO**  
8031414862160

colour

2 x E14 MAX 40W



Lampadina consigliata /  
Suggested light bulb




Lampadina non inclusa /  
Light bulb not included




**I-TUCSON-AP SIL**  
8031414862184

colour

2 x E14 MAX 40W



Lampadina consigliata /  
Suggested light bulb




Lampadina non inclusa /  
Light bulb not included




**I-TUCSON-AP BRO**  
8031414862191

colour

2 x E14 MAX 40W




Lampadina consigliata /  
Suggested light bulb



Lampadina non inclusa /  
Light bulb not included

# HURACAN


Applique in alluminio pressofuso antracite gofrato.  
Aluminum die-cast wall lamp embossed anthracite finish.

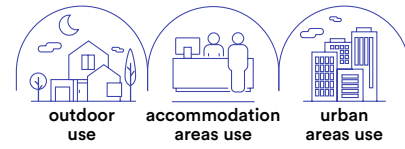

**I-HURACAN-AP**  
8031440361026

colour  
●

1 x GU10 MAX 35W



Lampadina non inclusa /  
Light bulb not included

# SEATTLE


Applique in alluminio, finitura antracite  
con diffusore opale in policarbonato.  
Aluminum wall lamp with anthracite  
finish and PC opal diffuser.



**I-SEATTLE-AP**  
8031440312233

colour  
●


1 x E27 MAX 42W



Lampadina non inclusa /  
Light bulb not included

# AUSTIN

Applique in alluminio bianco, silver, nero o bronzo con diffusore in policarbonato.  
Aluminum wall lamp white, silver, black or bronze PC diffuser.



technical information **AUSTIN**



	<p><b>I-AUSTIN-AP BCO</b> 8031440362122</p> <p>1 x E27 MAX 42W</p>	colour	●	Lampadina non inclusa / Light bulb not included
	<p><b>I-AUSTIN-AP SIL</b> 8031414862429</p> <p>1 x E27 MAX 42W</p>	colour	●	Lampadina non inclusa / Light bulb not included
	<p><b>I-AUSTIN-AP NER</b> 8031440362139</p> <p>1 x E27 MAX 42W</p>	colour	●	Lampadina non inclusa / Light bulb not included
	<p><b>I-AUSTIN-AP BRO</b> 8031440362108</p> <p>1 x E27 MAX 42W</p>	colour	●	Lampadina non inclusa / Light bulb not included

# BOSTON

Applique in alluminio finitura antracite con diffusore opale in policarbonato.


Aluminum wall lamp anthracite finish with PC opal diffuser.



**I-BOSTON-AP**  
8031440312240



1 x E27 MAX 42W



# ATLANTA

Applique in alluminio finitura antracite con diffusore opale in policarbonato.

Aluminum wall lamp anthracite finish with PC opal diffuser.




**I-ATLANTA-AP**  
8031440312257

1 x E27 MAX 42W



colour 




# DENVER

Applique in alluminio finitura antracite con diffusore opale in policarbonato.

Aluminum wall lamp anthracite finish with PC opal diffuser.



**I-DENVER-AP**  
8031440312264

1 x E27 MAX 42W




colour 





# MONDRIAN

Applique in metallo bianco, nero, silver o bronzo con diffusore in vetro.  
Metal wall lamp white, black, silver or bronze glass diffuser.

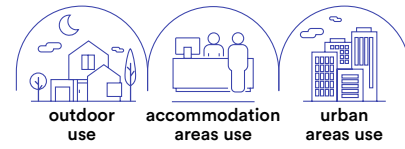

- |   | colour |
|---|--------|
| <b>I-MONDRIAN-AP BCO</b><br>8031414896134 |        |
| <b>I-MONDRIAN-AP SIL</b><br>8031414862306 |        |
| <b>I-MONDRIAN-AP NER</b><br>8031414896127 |        |
| <b>I-MONDRIAN-AP BRO</b><br>8031414862313 |        |

2 x E27 MAX 25W



Lampadina non inclusa / Light bulb not included


# GAETA

Lantern in alluminio pressofuso finitura nero-oro con diffusore in vetro.  
Diecast aluminum black-gold finish lantern with glass diffuser.



- |  |  |
|--|--|
| <b>LANT-GAETA-AP1</b><br>8031440313278 |  |
|--|--|

1 x E27 MAX 60W



Lampadina non inclusa / Light bulb not included

# GRUBB

Proiettore in termoplastica picchetto incluso.  
Thermoplastic flood light with spike included.



# AKRON

Proiettore in alluminio con picchetto incluso.  
Aluminum flood light with spike included.



colour	●
<b>LED-GRUBB-7M</b> 8031414883554	
1 x E27	

Accessori inclusi / Included accessories	
	Lampadina LED SMD / LED SMD light bulb
watt	7W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	510 lm
dimmer	




colour	●
<b>LED-GRUBB-15M</b> 8031414883547	
1 x E27	

Accessori inclusi / Included accessories	
	Lampadina LED SMD / LED SMD light bulb
watt	15W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h
4000K	
lumen	1100 lm
dimmer	



colour	●
<b>I-AKRON-BCO</b> 8031414882649	●
<b>I-AKRON-NER</b> 8031414882663	●
<b>I-AKRON-BRO</b> 8031414882656	●
1 x GU10 MAX 35W	

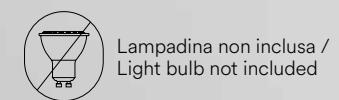

Lampadina non inclusa /  
Light bulb not included

OUTDOOR APPLIQUE / WALL LAMPS  
In-tec light



technical information **PEG**



**Materiale**  
PC

**Colore**  
nero

**Temperatura colore**  
3000K / 4000K

**Driver**  
integrato

**Material**  
PC

**Colour**  
black


**Colour temperature**  
3000K / 4000K

**Driver**  
built-in

**Proiettore in termoplastica con picchetto incluso.**  
Termoplastic flood light with spike included.




	colour temp.	colour
<b>LED-PEG-9C-NER</b> 8031414889600 lumen		
<b>LED-PEG-9M-NER</b> 8031414895403 lumen		
<b>watt</b>	9W	
<b>beam angle</b>	60°	





# TOGO

Plafoniera a LED in acrilico.  
LED acrylic ceiling lamp with diffuser.

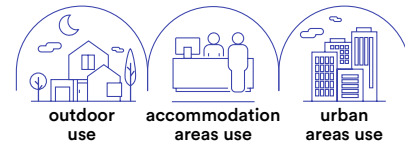


technical information **TOGO**



- Materiale**  
Acrilico PMMA
- Colore**  
bianco
- Temperatura colore selezionabile**  
3000K / 4000K / 6500K
- Driver**  
integrato
- Material**  
PMMA acrylic
- Colour**  
white
- Selectable color temperature**  
3000K / 4000K / 6500K
- Driver**  
built-in driver





**LED-TOGO-Q10**  
8031414883615

lumen 600 lm

---

watt 5W

beam angle 120°

colour temp.	colour
<span style="color: yellow;">●</span>	<span style="color: grey;">●</span>
<span style="color: blue;">●</span>	<span style="color: lightgrey;">●</span>





**LED-TOGO-Q25**  
8031414883646

lumen 2400 lm

---

watt 20W

beam angle 120°

colour temp.	colour
<span style="color: yellow;">●</span>	<span style="color: grey;">●</span>
<span style="color: blue;">●</span>	<span style="color: lightgrey;">●</span>





**LED-TOGO-RT20**  
8031414883622

lumen 1000 lm

---

watt 8W

beam angle 120°

colour temp.	colour
<span style="color: yellow;">●</span>	<span style="color: grey;">●</span>
<span style="color: blue;">●</span>	<span style="color: lightgrey;">●</span>





**LED-TOGO-RT30**  
8031414883639

lumen 1500 lm

---


watt 12W

beam angle 120°

colour temp.	colour
<span style="color: yellow;">●</span>	<span style="color: grey;">●</span>
<span style="color: blue;">●</span>	<span style="color: lightgrey;">●</span>




# OUTDOOR

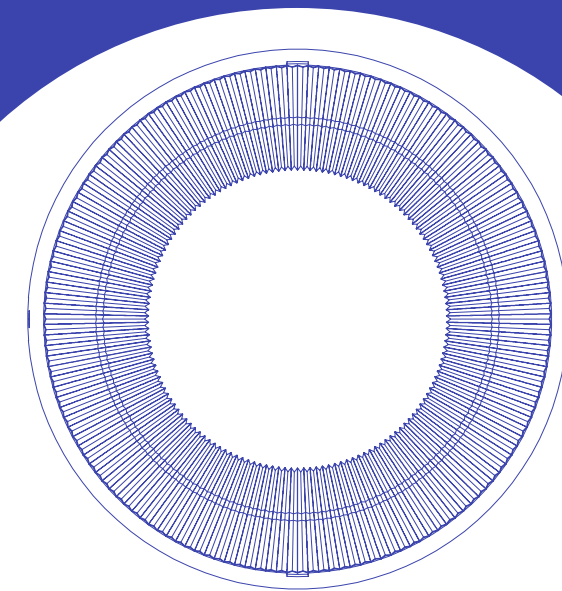

PLAFONIERE  
CEILING LAMPS

# ZOOM

**Plafoniera a LED wifi con videocamera di sicurezza integrata.**  
LED wifi ceiling lamp with built-in security camera.

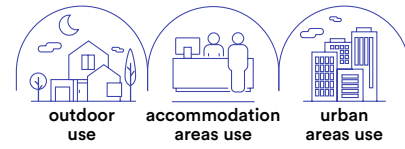





technical information ZOOM



- Materiale**  
alluminio + PC
- Colore**  
goffrato antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminium + PC
- Colour**  
Embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in




<b>LED-ZOOM-INT</b> 8031414877874	colour temp.	colour
lumen	3600 lm	
watt	30W	
beam angle	110°	
pf	0.95	

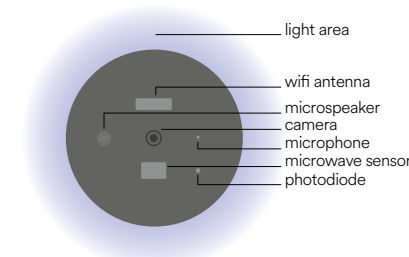

Tipo di sensore video Video sensor type	1/2,9" CMOS
Pixel	2.0 Mega
Illuminazione minima Min illuminance	Color 0.10lux @F2.0, black and white 0.01lux @F2.0
Angolo vista camera Camera view angle	135°
Otturatore Shutter	1/25-1/100,000 per second
Infrarossi IR	High power LED with ICR
WDR	Digital WDR
Video compression standard	H.264 32Kbps - 2Mbps
Risoluzione video Max picture size	1920x1080
Frequenza fotogrammi Frame rate	1-20 per second
Audio	Full duplex audio (doppio sistema di comunicazione)
Memoria	Support SD card (MAX 128Gb) Cloud storage NVR
Impostazione immagine Image setting	Support HD/SD; support mirror
Reset	Support
Controllo della luce Lighting control	Support manual, sensor, plan switch light (gestione accensioni)
Interfaccia di protocollo Interface protocol	Private
Comunicazione di protocollo Communication protocol	TCP/IP, HTTP, DHCP, DNS, RTSP
Funzioni generali General function	Dual stream, password protection
Wi-Fi	IEEE802.11b/g/n
PIR	Support PIR and motion detection

Control system easy installation


Full duplex audio

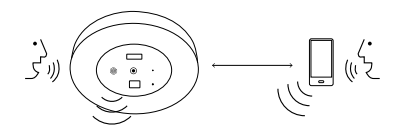

In.tec light OUTDOOR PLAFONIERE / CEILING LAMPS

# CITIZEN

Plafoniera in alluminio nelle versioni bianco, nero o corten.  
Ceiling wall lamp white, black or corten finish.




technical information **CITIZEN**




colour

- I-CITIZEN-Q1-BCO**  
8031414882922
- I-CITIZEN-Q1-NER**  
8031414882939
- I-CITIZEN-Q1-BRO**  
8031414882915



1 x E27



Lampadina non inclusa / Light bulb not included




colour

- I-CITIZEN-R1-BCO**  
8031414882892
- I-CITIZEN-R1-NER**  
8031414882908
- I-CITIZEN-R1-BRO**  
8031414882885




1 x E27



Lampadina non inclusa / Light bulb not included

# TOWER

Plafoniera in alluminio nelle versioni bianco, nero o corten.  
Ceiling wall lamp white, black or corten finish.



technical information **TOWER**




colour

- I-TOWER-Q1-BCO**  
8031414922093
- I-TOWER-Q1-NER**  
8031414922116
- I-TOWER-Q1-BRO**  
8031414922109



1 x GX53



Lampadina non inclusa / Light bulb not included




colour

- I-TOWER-R1-BCO**  
8031414918522
- I-TOWER-R1-NER**  
8031414918515
- I-TOWER-R1-BRO**  
8031414918539



1 x GX53




Lampadina non inclusa / Light bulb not included

# ISCHIA

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

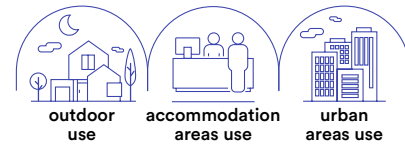

**Materiale**  
termoplastica



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
thermoplastic

**Colour temperature**  
3000K / 4000K



**Driver**  
built-in



**LED-ISCHIA-L-BCO**

8031414883608

lumen

colour temp.



2300 lm

colour




watt

20W

beam angle

100°



# CAPRI

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.



**Materiale**  
termoplastica



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
thermoplastic

**Colour temperature**  
3000K / 4000K



**Driver**  
built-in

**LED-CAPRI-S-BCO**

8031414883585

lumen

colour temp.



2350 lm

colour




watt

20W

beam angle

100°



**LED-CAPRI-L-BCO**

8031414883592

lumen

colour temp.



3200 lm

colour




watt

30W

beam angle

100°



# ALWAYS



**Materiale**  
PC + PC

**Temperatura colore**  
2700K / 3000K / 4000K / 5000K / 6500K



**Driver**  
integrato

**Material**  
PC + PC

**Colour temperature**  
2700K / 3000K / 4000K / 5000K / 6500K




**Driver**  
built-in




**Plafoniera in termoplastica con selettore interno di watt e gradi Kelvin. Sensore radar 5.8GHz integrato con tasto di regolazione durata.**

Thermoplastic ceiling lamp with internal watt and Kelvin selector, integrated 5.8GHz radar sensor with duration adjustment button.




**LED-ALWAYS-RS**  
8031414926923

lumen	1500lm / 1900lm / 2250lm
watt	15W / 20W / 25W
beam angle	120°
pf	0.90



**Accessori inclusi / Included accessories**

Sensore di movimento radar /  
Radar motion sensor

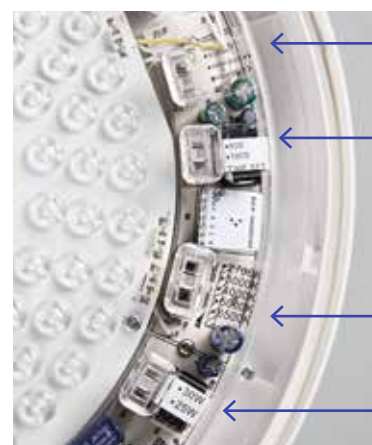


Modalità sensore:  
solo movimento - crepuscolare + movimento - solo crepuscolare /  
Sensor mode: motion only - dusk + motion - dusk only

Selezione durata accensione  
con sensore di movimento 60S - 180S /  
Motion sensor duration selection: 60S - 180S

Selezione gradi kelvin: 2700K 3000K 4000K 5000K 6500K /  
Kelvin degrees selection: 2700K 3000K 4000K 5000K 6500K

Selezione potenza: 15W 25W 30W /  
Power selection: 15W 25W 30W

# HUBLLOT SENS

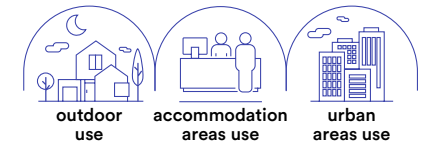

**Materiale**  
PC + PC

**Temperatura colore**  
3000K / 4000K / 6500K



**Driver**  
integrato

**Material**  
PC + PC

**Colour temperature**  
3000K / 4000K / 6500K




**Driver**  
built-in




**Plafoniera in termoplastica con selettore interno Kelvin, sensore microwave regolabile integrato regolabile.**

Thermoplastic ceiling lamp with internal Kelvin selector, integrated adjustable microwave sensor.



**LED-HUBLLOT-SENS**  
8031414919604


lumen	1800 lm
watt	18W
beam angle	120°
pf	0.90



**Accessori inclusi / Included accessories**

Sensore di movimento 100% luce  
Dopo 30 secondi 20% luce /  
Motion sensor 100% light  
After 30 seconds 20% light

sensore regolabile con LED-SENSOR-REMOTE p. 860  
adjustable sensor with LED-SENSOR-REMOTE p. 860



OUTDOOR PLAFONIERE / CEILING LAMPS

In.tec light



**Materiale**

PP + PC

**Colore**

bianco  
antracite



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PP + PC

**Colour**

white  
anthracite




**Colour temperature**

3000K / 4000K



**Driver**

built-in





Doppio sistema di installazione / Double installation system

**Plafoniera LED integrato con sensore di movimento; materiale base in PP bianco o antracite con diffusore bianco PC.**  
LED ceiling lamp with motion sensor; PP white base or anthracite colour with white PC diffuser.



**Accessori inclusi / Included accessories**

Sensore di movimento regolabile / Adjustable motion sensor



	colour temp.	colour
<b>LED-SENSITIVE-C BCO</b> 8031414876815 lumen		
	1000 lm	
<b>LED-SENSITIVE-BCO</b> 8031440361750 lumen		
	1600 lm	
<b>LED-SENSITIVE-ANT</b> 8031440361743 lumen		
	1600	
watt	14W	
beam angle	120°	





**Materiale**

PP + PC

**Colore**

bianco  
antracite



**Temperatura colore**

4000K



**Driver**

integrato

**Material**

PP + PC

**Colour**

white  
anthracite



**Colour temperature**

4000K




**Driver**


built-in

**Plafoniera LED integrato materiale base PP bianco con diffusore bianco PC adatte ad installazione con impianto canaline esterne.**


Ceiling LED integrated white PP base material with white PC diffuser fit for surface mount cable ducts connections.



	colour temp.	colour
<b>LED-EXTRA-BCO</b> 8031440361071	●	●
lumen	1100 lm	
<b>LED-EXTRA-ANT</b> 8031440361064	●	●
lumen	1100 lm	
watt	10W	
beam angle	120°	



Doppio sistema di installazione /  
Double installation system



Adatte ad installazione con impianto canaline esterne /  
Surface mount cable ducts connections



**Materiale**  
PC + PC

**Colore**  
bianco  
antracite



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
PC + PC

**Colour**  
white  
anthracite



**Colour temperature**  
4000K





**Driver**  
built-in

**Plafoniera LED integrato con sensore, base in policarbonato bianco o antracite diffusore in policarbonato bianco.**  
Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser.




**Accessori inclusi / Included accessories**

Sensore di movimento regolabile / Adjustable motion sensor



	colour temp.	colour
<b>LED-SHELLY-Q-MW BCO</b> 8031414862153		
lumen	2500 lm	
<b>LED-SHELLY-Q-MW ANT</b> 8031414862177		
lumen	2500 lm	
watt	20W	
beam angle	120°	



Doppio sistema di installazione / Double installation system



**Materiale**

PC + PC

**Colore**

bianco  
antracite



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PC + PC

**Colour**

white  
anthracite



**Colour temperature**

3000K / 4000K



**Driver**

built-in

**Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.**


Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



**LED-SHELLY-Q-S BCO**

8031414085507

lumen




1900 lm

**LED-SHELLY-Q-S ANT**


8031414862009

lumen



1900 lm


watt 15W  
beam angle 120°



**LED-SHELLY-Q-L BCO**

8031414862016

lumen




2500 lm

**LED-SHELLY-Q-L ANT**


8031414862023

lumen



2500 lm

watt 20W  
beam angle 120°



**Materiale**

PC + PC

**Colore**

bianco  
antracite



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PC + PC

**Colour**

white  
anthracite



**Colour temperature**

3000K / 4000K



**Driver**

built-in

**Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.**


Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



**LED-SHELLY-S BCO**

8031440351720

lumen




1900 lm

**LED-SHELLY-S ANT**


8031440351706

lumen



1900 lm


watt 15W  
beam angle 120°



**LED-SHELLY-L BCO**

8031440351713

lumen




2500 lm

**LED-SHELLY-L ANT**



8031440351690

lumen




2500 lm


watt 20W  
beam angle 120°



Doppio sistema di installazione / Double installation system



Doppio sistema di installazione / Double installation system

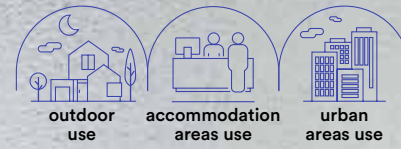

**Materiale**  
PC + PC

**Colore**  
bianco  
antracite



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
PC + PC

**Colour**  
white  
anthracite



**Colour temperature**  
3000K / 4000K






**Driver**  
built-in

**Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.**  
Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



	colour temp.	colour
<b>LED-EVER-Q-S BCO</b> 8031414862238 lumen		
	1900 lm	
<b>LED-EVER-Q-S ANT</b> 8031414862269 lumen		
	1900 lm	
watt	15W	
beam angle	120°	
pf	-	

	colour temp.	colour
<b>LED-EVER-Q-L BCO</b> 8031414862276 lumen		
	3420	
<b>LED-EVER-Q-L ANT</b> 8031414862283 lumen		
	3420	
watt	28W	
beam angle	120°	
pf	0.90	



Doppio sistema di installazione / Double installation system

**Materiale**

PC + PC

**Colore**

bianco  
antracite



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PC + PC

**Colour**

white  
anthracite



**Colour temperature**

3000K / 4000K



**Driver**

built-in

**Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.**

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



**LED-EVER-LP BCO**

8031440355650

lumen

colour temp.	colour

2500 lm


**LED-EVER-LP ANT**

8031440355643

lumen

2500 lm

watt	20W
beam angle	120°
pf	-



**LED-EVER-XLP BCO**

8031440355636

lumen

colour temp.	colour

3750 lm


**LED-EVER-XLP ANT**

8031440355629

lumen

3750 lm

watt	28W
beam angle	120°
pf	0.90



**Materiale**

PC + PC

**Colore**

bianco  
antracite



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PC + PC

**Colour**

white  
anthracite



**Colour temperature**

3000K / 4000K




**Driver**

built-in

**Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.**

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.

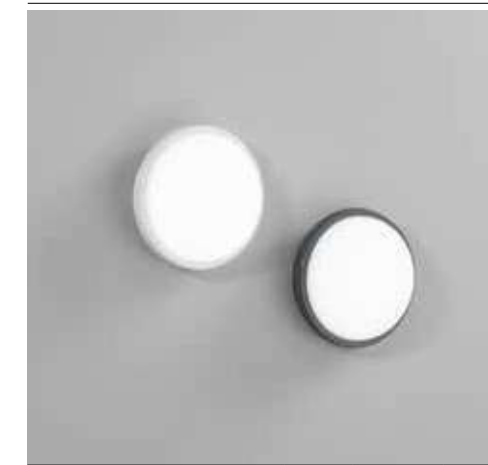

**LED-EVER-S BCO**

8031440351683

lumen

colour temp.	colour

1900 lm



**LED-EVER-S ANT**

8031440351638

lumen

1900 lm

watt	15W
beam angle	120°
pf	-

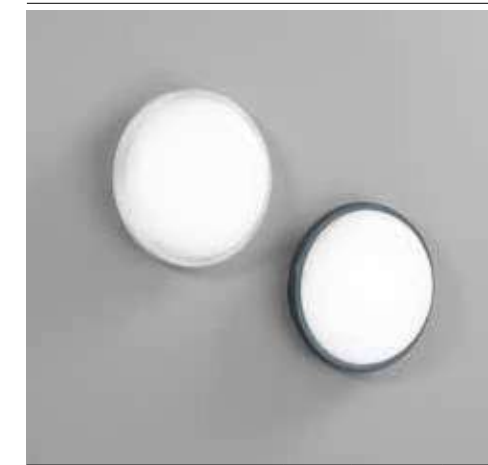

**LED-EVER-L BCO**

8031440351676

lumen

colour temp.	colour

2500 lm



**LED-EVER-L ANT**

8031440351645


lumen

2500 lm

watt	20W
beam angle	120°
pf	0.90



Doppio sistema di installazione / Double installation system



Doppio sistema di installazione / Double installation system



**Materiale**  
PC + PC

**Colore**  
bianco  
silver



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
PC + PC

**Colour**  
white  
silver



**Colour temperature**  
3000K / 4000K





**Driver**  
built-in

**Plafoniera LED integrato, base policarbonato bianco o silver con diffusore in policarbonato bianco.**  
Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser.



	colour temp.	colour
<b>LED-EVER-XL BCO</b> 8031440355612 lumen		
	3750 lm	
<b>LED-EVER-XL SIL</b> 8031440355605 lumen		
	3750 lm	
watt	28W	
beam angle	120°	
pf	0.90	



Doppio sistema di installazione / Double installation system

**Materiale**  
PC + PC

**Colore**  
bianco  
silver



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
PC + PC

**Colour**  
white  
silver




**Colour temperature**  
4000K





**Driver**  
built-in

**Plafoniera con sensore di movimento microwave, base in policarbonato, diffusore in policarbonato bianco.**  
Ceiling lamp with microwave sensor in polycarbonate ceiling with white PC diffuser.

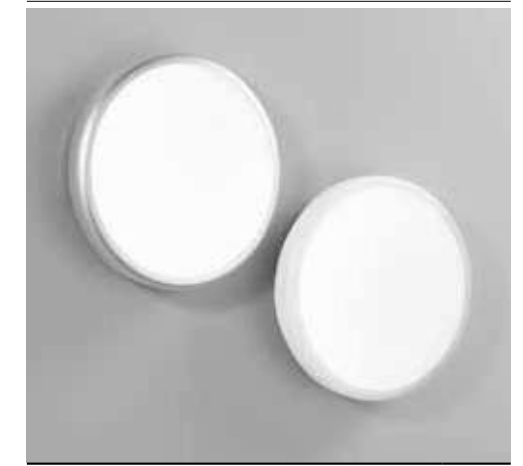


	colour temp.	colour
<b>LED-EVER-XL-MW BCO</b> 8031414862375 lumen		
	3750 lm	
<b>LED-EVER-XL-MW SIL</b> 8031414862610 lumen		
	3750 lm	
watt	28W	
beam angle	120°	
pf	0.90	



Doppio sistema di installazione / Double installation system

**Accessori inclusi / Included accessories**

Sensore di movimento regolabile / Adjustable motion sensor



9m 180° **15-180"**  
off on  
5-400 LUX



**Materiale**

PC

**Colore**

bianco



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

white PC

**Colour**

white



**Colour temperature**

3000K / 4000K




**Driver**

built-in

**Plafoniera con base in policarbonato, diffusore in policarbonato bianco.**

Ceiling lamp with polycarbonate ceiling with white PC diffuser.



**LED-FLIPPY-12C**

8031414922024

lumen

colour temp. | colour

1160 lm

watt 12W  
beam angle 120°

**LED-FLIPPY-12M**


8031414922031

lumen

1160 lm

watt 18W  
beam angle 120°

# SPEEDY



technical information **SPEEDY**



**Materiale**

PC

**Colore**

bianco



**Temperatura colore**

3000K / 4000K



**Driver**

integrato

**Material**

PC

**Colour**

white



**Colour temperature**

3000K / 4000K




**Driver**

built-in

**Plafoniera con base in policarbonato, diffusore in policarbonato bianco.**

Ceiling lamp with polycarbonate ceiling with white PC diffuser.



**LED-SPEEDY-18C**

8031414922000

lumen

colour temp. | colour



1800 lm

watt

12W

beam angle

120°

**LED-SPEEDY-18M**

8031414922017

lumen

colour temp. | colour

1800 lm


watt

18W

beam angle

120°






**Plafoniera bianca o nera con struttura in termoplastica e diffusore in vetro. Disponibile in forma circolare o ovale.**  
 White or black ceiling lamp with thermoplastic frame and glass diffuser. Available in circular or oval shape.




colour

**I-TURTLE-AP-BCO**  
8031414918577  
**I-TURTLE-AP-NER**  
8031414918560



1 x E27




colour

**I-TURTLE-PL-BCO**  
8031414918553  
**I-TURTLE-PL-NER**  
8031414918546



1 x E27



Lampadina non inclusa / Light bulb not included



# PICNIC COLOR



technical information **PICNIC COLOR**



**Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.**  
Light string E12 PVC cable inclusive of schuko plug and modular connector.

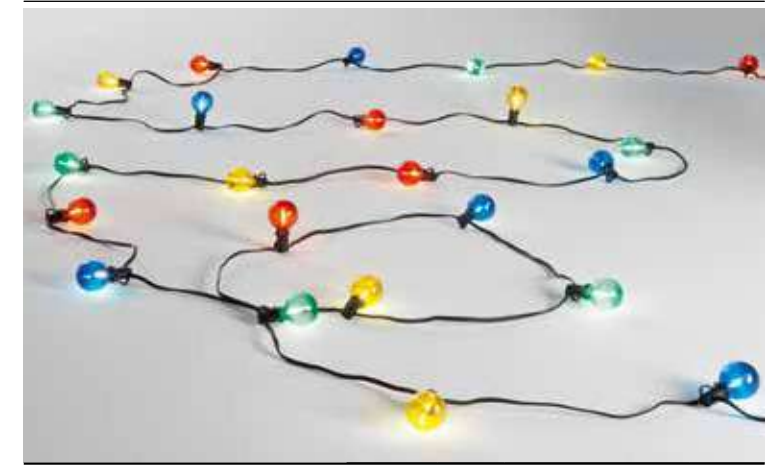

colour | Accessori inclusi / Included accessories

**I-PICNIC-COLOR**  
8031414891863




25 x E12 MAX 20W

**Lampadina E12**  
**E12 light bulb**


7 rosse/red  
6 gialle/yellow  
6 verdi/green  
6 blu/blue

watt 0,3W  
volt 230V





**END-TO-END**

easy connection / max 1000W

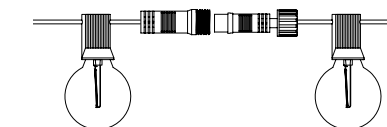

**Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.**

Light string E12 PVC cable inclusive of schuko plug and modular connector.

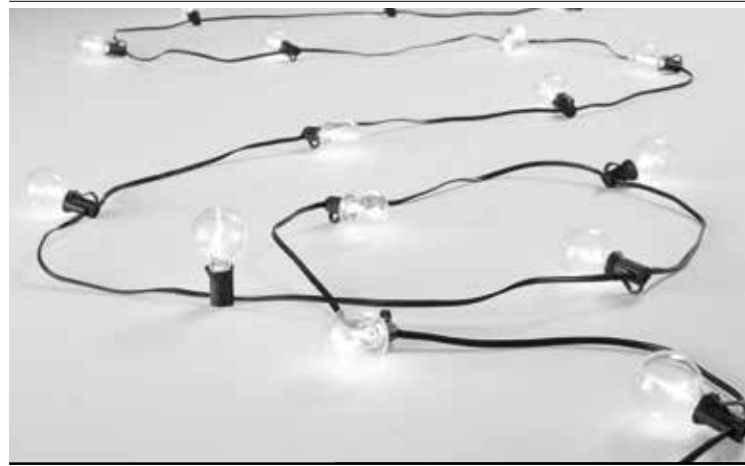

colour | Accessori inclusi / Included accessories


**I-PICNIC-LED**  
8031414884407



**Lampadina E12**  
E12 light bulb

watt	0,3W
volt	230V
3000K	

25 x E12 MAX 20W




**END-TO-END**  
easy connection / max 1000W



**Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di pannello solare.**

Light string E12 PVC cable inclusive solar panel.



colour | Accessori inclusi / Included accessories


**I-PICNIC-SOLAR**  
8031414884414




**Lampadina E12**  
E12 light bulb

watt	0,3W
volt	3V
3000K	

25 x E12 MAX 20W




**3.7V 2200mAh**  
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



**END-TO-END**  
easy connection / max 1000W

**Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile.**

Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector.




colour |

**I-PICNIC-E27-BCO**  
8031414043064  
**I-PICNIC-E27**  
8031414862719




Lampadina non inclusa / Light bulb not included

10 x E27 MAX 25W

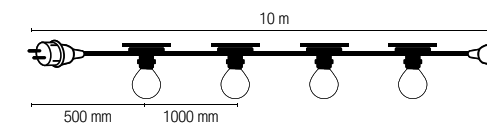


**END-TO-END**  
easy connection / max 1000W



**Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile.**

Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector.




colour |

**I-PICNIC-E14-BCO**  
8031414023745  
**I-PICNIC-E14**  
8031414862726




Lampadina non inclusa / Light bulb not included

10 x E14 MAX 25W

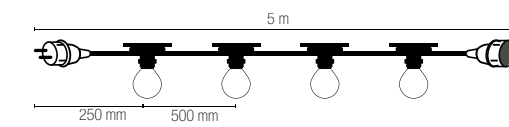

**END-TO-END**  
easy connection / max 1000W



# PICNIC RGB

Stringa luminosa LED per esterno con cavo in PVC, inclusa spina schuko e connettore modulabile.  
Telecomando per gestire il colore RGB.  
Outdoor LED light string with PVC cable, including schuko plug and modular connector.  
Remote control to manage RGB color.



**Materiale**  
PC + PVC

**Colore**  
nero

**Temperatura colore**  
RGB + CCT



**Driver**  
integrato

**Material**  
PC + PVC

**Colour**  
black


**Colour temperature**  
RGB + CCT




**Driver**  
built-in




**I-PICNIC-LED-RGB**  
8031414921911



watt 10W



**END-TO-END**  
easy connection / max 1000W

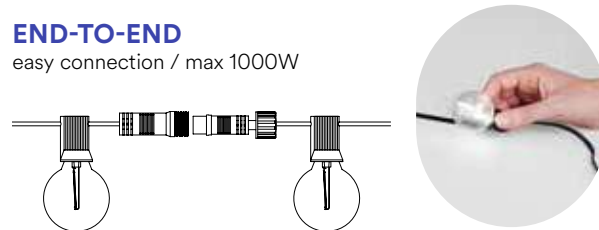

# PICNIC INT

Stringa elettrificata a LED per esterno con cavo in PVC inclusa di spina schuko e connettore modulabile.  
LED light string with PVC cable inclusive of schuko plug and modular connector.



**Materiale**  
PC + PVC

**Colore**  
nero

**Temperatura colore**  
RGB + CCT



**Driver**  
integrato

**Material**  
PC + PVC

**Colour**  
black


**Colour temperature**  
RGB + CCT




**Driver**  
built-in




**I-PICNIC-INT**  
8031414884391  
lumen



watt 10 x 0,5W  
beam angle 110°

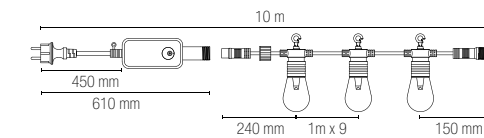


**END-TO-END**  
easy connection / max 1000W

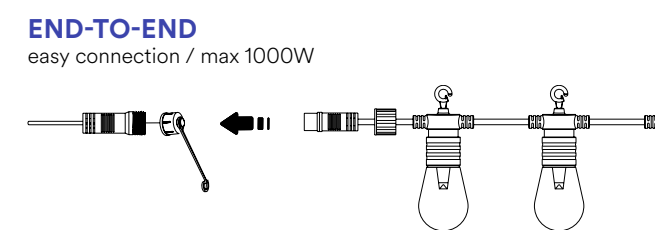


Control system easy installation



# OUTDOOR

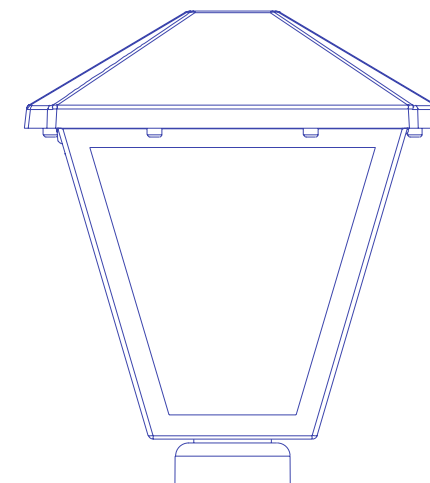

APPLIQUE SOSPENSIONI E PALETTI CORRELATI  
WALL SUSPENSION AND FLOOR LAMPS COMBINED







# POLLY

Collezione con base in fibre di plastica e sfere in PMMA nei colori trasparente, bianco o fumè.  
Collection with base in plastic fibers and spheres in PMMA in transparent, white or smoked colors.




technical information **POLLY**






	colour
<b>I-POLLY-G20-TR180</b> 8031414921973	
1 x E27 MAX 20W	




Technical drawing showing a sphere with a diameter of 250 mm and a base diameter of 126 mm. The total height is 260 mm.





	colour
<b>I-POLLY-G25-TR180</b> 8031414921980	
1 x E27 MAX 20W	



Technical drawing showing a sphere with a diameter of 200 mm and a base diameter of 101 mm. The total height is 210 mm.



	colour
<b>I-POLLY-G30-TR180</b> 8031414921997	
1 x E27 MAX 20W	



Technical drawing showing a sphere with a diameter of 300 mm and a base diameter of 146 mm. The total height is 310 mm.




	colour
<b>I-POLLY-G20-TR</b> 8031414889136	
<b>I-POLLY-G20-BCO</b> 8031414889112	
<b>I-POLLY-G20-GR</b> 8031414889129	
1 x E27 MAX 20W	



Technical drawing showing a sphere with a diameter of 200 mm and a base diameter of 101 mm. The total height is 210 mm.



	colour
<b>I-POLLY-G25-TR</b> 8031414889167	
<b>I-POLLY-G25-BCO</b> 8031414889143	
<b>I-POLLY-G25-GR</b> 8031414889150	
1 x E27 MAX 20W	



Technical drawing showing a sphere with a diameter of 250 mm and a base diameter of 126 mm. The total height is 260 mm.



	colour
<b>I-POLLY-G30-TR</b> 8031414889198	
<b>I-POLLY-G30-BCO</b> 8031414889174	
<b>I-POLLY-G30-GR</b> 8031414889181	
1 x E27 MAX 20W	



Technical drawing showing a sphere with a diameter of 300 mm and a base diameter of 146 mm. The total height is 310 mm.



	colour
<b>I-POLLY-AP-TR</b> 8031414889105	
<b>I-POLLY-AP-BCO</b> 8031414889389	
<b>I-POLLY-AP-GR</b> 8031414889099	
1 x E27 MAX 20W	





Technical drawing showing a sphere with a diameter of 200 mm and a base diameter of 280 mm. The total height is 240 mm.



**I-POLLY-PD**  
8031414921942


Accessorio per sospensione con cavo in gomma e connettore / Suspension accessory with rubber cable


colour 



**I-POLLY-SPK**  
8031414921959


Accessorio per fissaggio a picchetto con connettore e fermacavo / Accessory for peg fixing with connector and cable holder


colour 




**I-POLLY-SPK-S**  
8031414921966

Accessorio per fissaggio a picchetto con cavo in gomma e presa schuko / Accessory for peg fixing with rubber cable and schuko socket

colour 



**Accessori inclusi / Included accessories**


 Cavo 2,5 m con spina schuko / 2,5 m of cable with schuko plug

 IP44







- |   | colour |
|---|--------|
| <b>I-POLLY-TUBE100</b><br>8031414890149 | ●      |
| <b>I-POLLY-TUBE150</b><br>8031414890156 | ●      |
| <b>I-POLLY-TUBE200</b><br>8031414890163 | ●      |

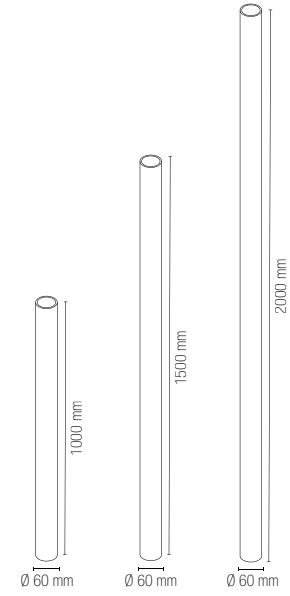


**I-POLLY-BASE**  
8031414889235



**I-POLLY-JOINT**  
8031414890170



**I-POLLY-BASE-AP**  
8031414904587



# WAMI

Collezione a LED integrato in alluminio pressofuso nei colori antracite o corten gofrato con temperatura colore selezionabile.

Integrated LED collection in die-cast aluminum in anthracite or corten embossed colors with selectable color temperature.




technical information **WAMI**




- Materiale**  
alluminio
- Colore**  
gofrato antracite  
gofrato corten
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite  
embossed corten
- Selectable color temperature**  
3000K / 4000K
- Driver**  
built-in




	colour temp.	colour
<b>LED-WAMI-AP-ANT</b> 8031414890026		
lumen	1530 lm	
<b>LED-WAMI-AP-BRO</b> 8031414890057		
lumen	1530 lm	
watt	12W	
beam angle	120°	



	colour temp.	colour
<b>LED-WAMI-P25-ANT</b> 8031414890033		
lumen	1530 lm	
<b>LED-WAMI-P25-BRO</b> 8031414890064		
lumen	1530 lm	
watt	12W	
beam angle	120°	



	colour temp.	colour
<b>LED-WAMI-P80-ANT</b> 8031414890040		
lumen	1530 lm	
<b>LED-WAMI-P80-BRO</b> 8031414890071		
lumen	1530 lm	
watt	12W	
beam angle	120°	



# SAIL

Collezione in alluminio a LED integrato con finitura bianco o antracite goffrato.  
Aluminum collection LED lamp white or anthracite embossed finish.




technical information **SAIL**




- Materiale**  
alluminio
- Colore**  
goffrato bianco  
goffrato antracite
- Temperatura colore**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed white  
embossed anthracite
- Colour temperature**  
3000K / 4000K
- Driver**  
built-in



	colour temp.	colour
<b>LED-SAIL-AP-BCO</b> 8031414918614	☀️	⚪
lumen	1440 lm	
<b>LED-SAIL-AP-ANT</b> 8031414920174	☀️	⚫
lumen	1440 lm	
watt	12W	
beam angle	180°	



	colour temp.	colour
<b>LED-SAIL-APS-BCO</b> 8031414920181	☀️	⚪
lumen	1440 lm	
<b>LED-SAIL-APS-ANT</b> 8031414918621	☀️	⚫
lumen	1440 lm	
watt	12W	
beam angle	180°	




**Accessori inclusi / Included accessories**

- Sensore di movimento regolabile distanza max 6m 120° / Adjustable motion sensor max distance 6m 120°
- 8m on 20% LM 120° <20 LUX
- 30<sup>sec</sup> 100% LM



	colour temp.	colour
<b>LED-SAIL-P90-BCO</b> 8031414918638	☀️	⚪
lumen	1440 lm	
<b>LED-SAIL-P90-ANT</b> 8031414918645	☀️	⚫
lumen	1440 lm	
watt	12W	
beam angle	180°	

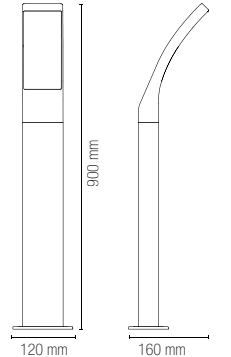


# DISCOVERY

Collezione a LED integrato in alluminio con finitura antracite goffrato.  
Aluminum collection LED lamp anthracite embossed finish.



collection **DISCOVERY**




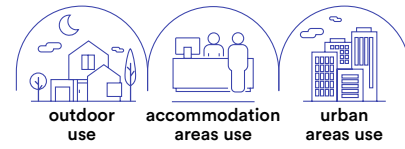

- Materiale**  
alluminio
- Colore**  
goffrato antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in




	colour temp.	colour
<b>LED-DISCOVERY-AP</b> 8031414877836		
lumen	1440 lm	
watt	13W	
beam angle	360°	



	colour temp.	colour
<b>LED-DISCOVERY-P65</b> 8031414877850		
lumen	1440 lm	
watt	13W	
beam angle	360°	



	colour temp.	colour
<b>LED-DISCOVERY-HUB</b> 8031414877867		
lumen	1440 lm	
watt	13W	
beam angle	360°	
	Plug 2X max 15A 250V 2500W	



# IDEM


Lampada in alluminio a LED integrato finitura antracite goffrato.  
Aluminum collection anthracite colour built-in LED.



technical information **IDEM**




- Materiale**  
alluminio
- Colore**  
goffrato antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in

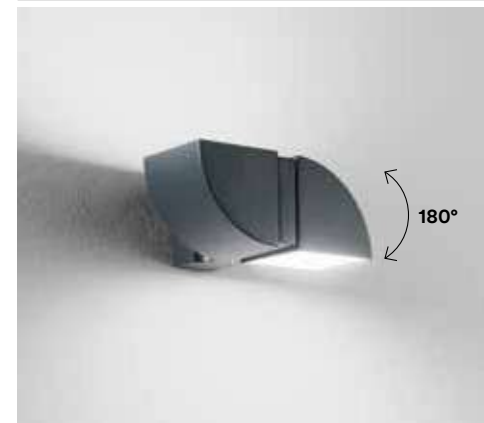

**LED-IDEM-AP**  
8031414883103  
lumen

colour temp.	colour
840 lm	


watt	8W
beam angle	120°



**LED-IDEM-P1**  
8031414883110  
lumen

colour temp.	colour
840 lm	

watt	8W
beam angle	120°

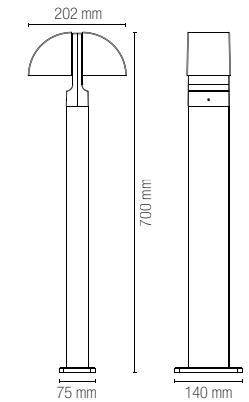

# REVERSE



Lampada in alluminio a LED integrato finitura antracite goffrato.  
Aluminum collection anthracite colour built-in LED.




technical information **REVERSE**




- Materiale**  
alluminio
- Colore**  
goffrato antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in

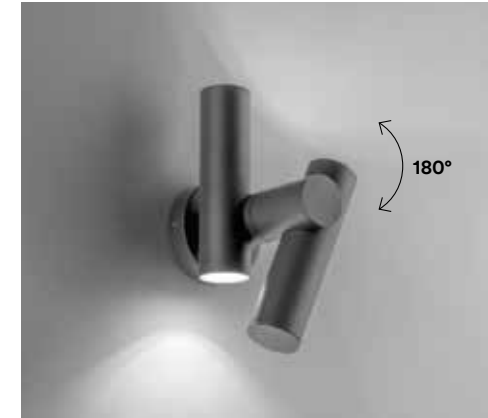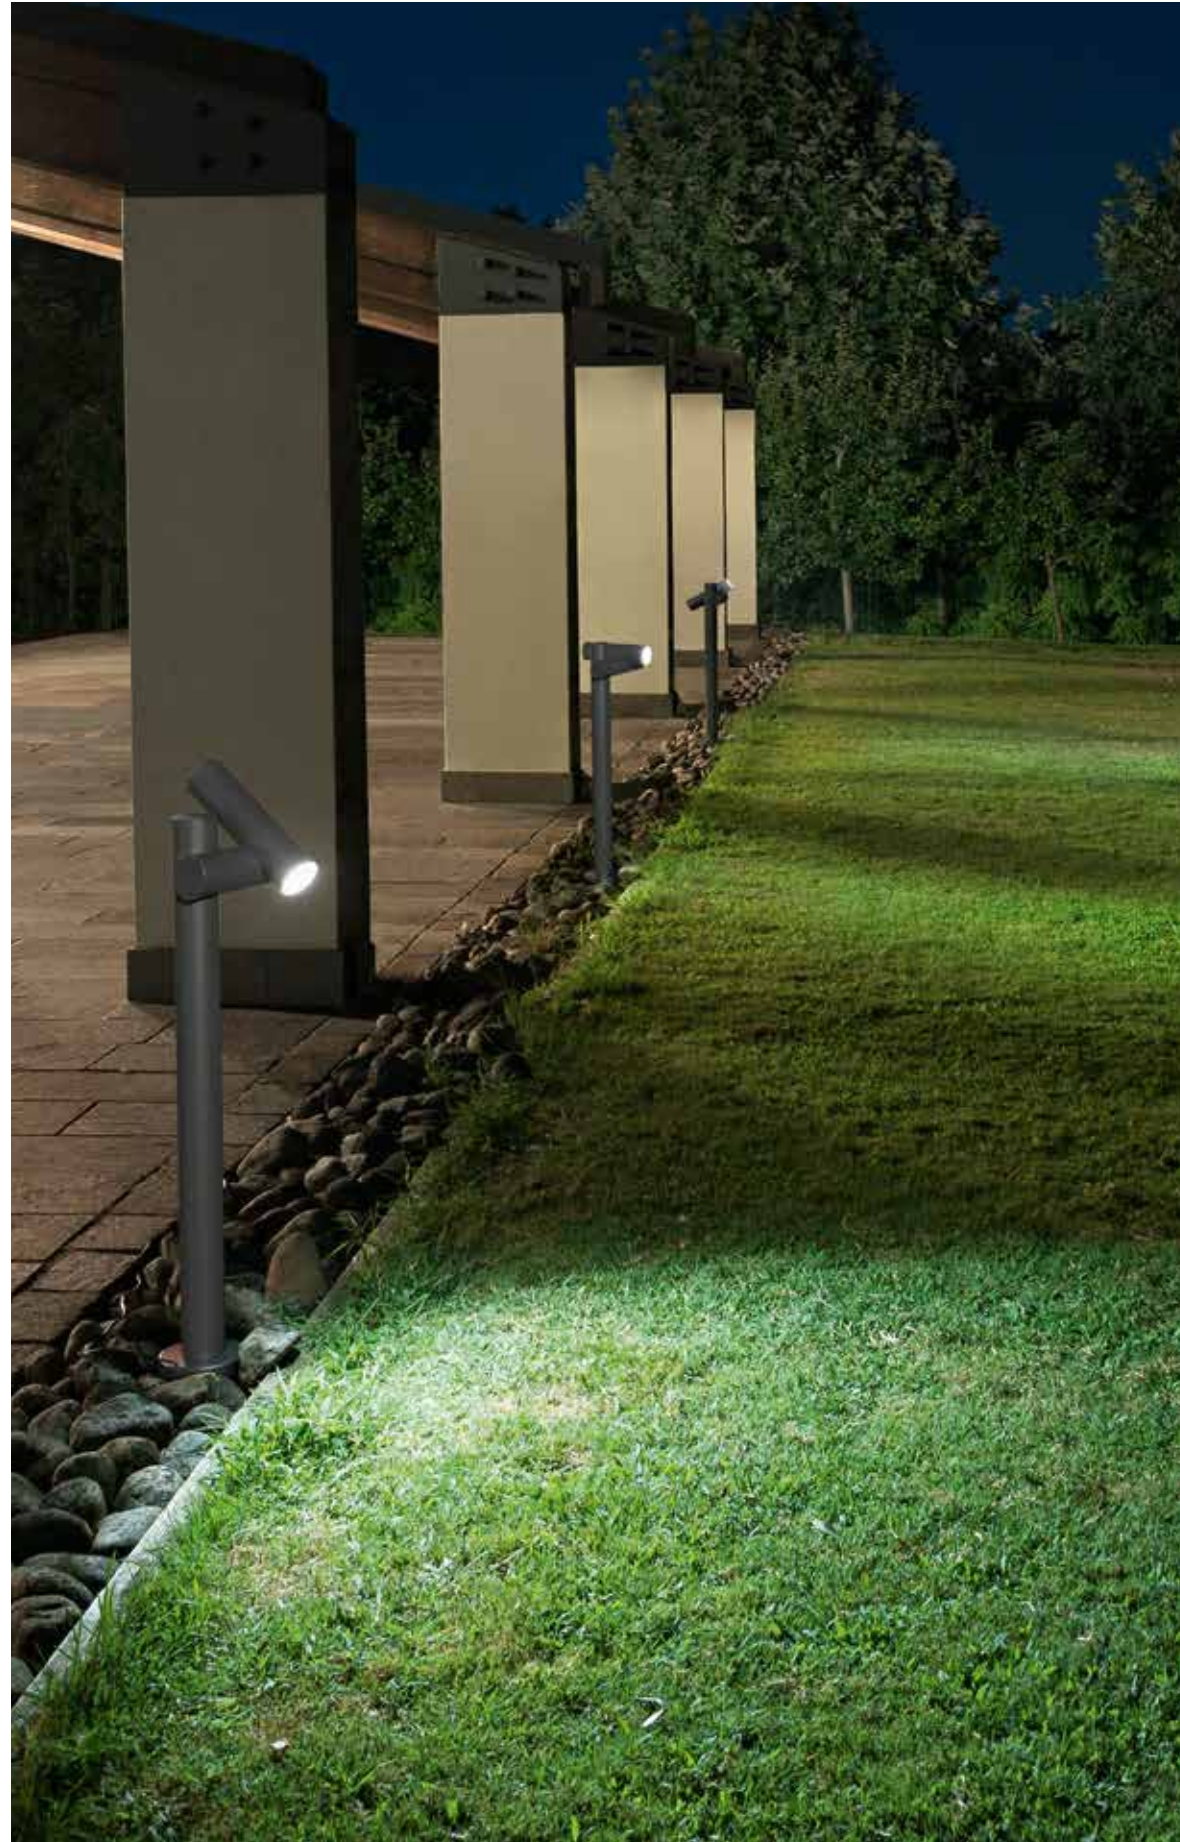

	colour temp.	colour
<b>LED-REVERSE-AP</b> 8031414883127		
lumen	620 lm	
watt	7,5W	
beam angle	120°	



	colour temp.	colour
<b>LED-REVERSE-P1</b> 8031414883134		
lumen	460 lm	
watt	5,3W	
beam angle	120°	

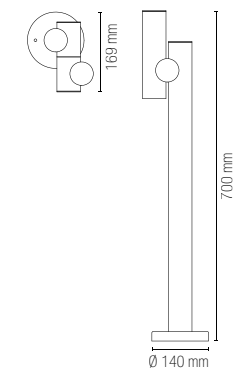

# SINTESI


Lampada in alluminio a LED integrato con finitura bianco o nero goffrato.  
Built in aluminum LED lamp white or black embossed finish.



technical information **SINTESI**




- Materiale**  
alluminio
- Colore**  
goffrato bianco  
goffrato nero
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed white  
embossed black
- Colour temperature**  
4000K
- Driver**  
built-in

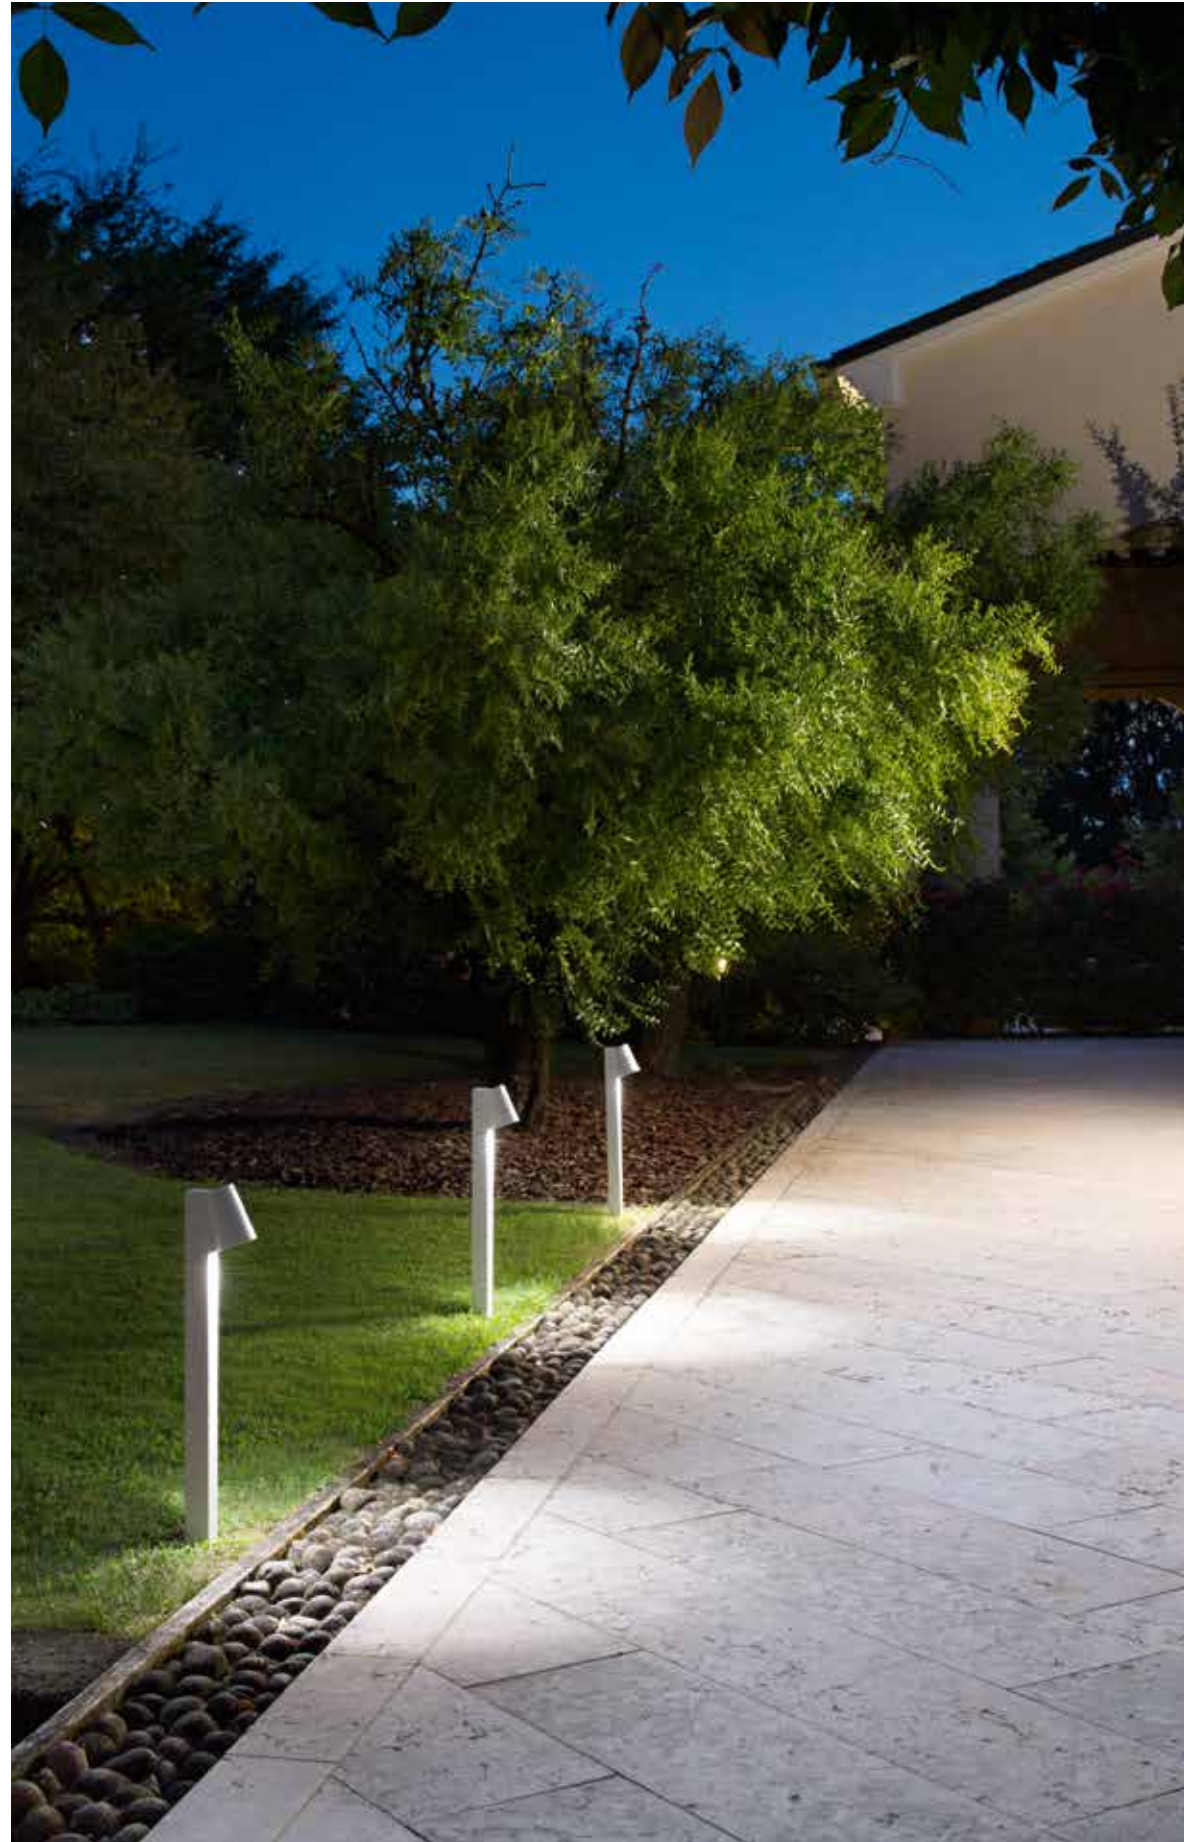

	colour temp.	colour
<b>LED-SINTESI-AP BCO</b> 8031414862207	●	●
lumen	400 lm	
<b>LED-SINTESI-AP NERO</b> 8031414862221	●	●
lumen	400 lm	
watt	6W	
beam angle	100°	



	colour temp.	colour
<b>LED-SINTESI-P BCO</b> 8031414862245	●	●
lumen	400 lm	
<b>LED-SINTESI-P NERO</b> 8031414862252	●	●
lumen	400 lm	
watt	6W	
beam angle	100°	



In.tec light **OUTDOOR** APPLIQUE SCOPERSONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



# ALYSON

Lampada in alluminio pressofuso a LED integrato nei colori nero o bianco gofrato con diffusore il policarbonato.

Built in aluminum LED lamp white or black embossed finish with PC diffuser.



technical information **ALYSON**



**Materiale**  
alluminio

**Colore**  
gofrato bianco  
gofrato nero



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
aluminum

**Colour**  
embossed white  
embossed black




**Colour temperature**  
4000K




**Driver**  
built-in



	colour temp.	colour
<b>LANT-ALYSON/AP BCO</b> 8031440361514		
lumen	1300 lm	
<b>LANT-ALYSON/AP</b> 8031440361552		
lumen	1300 lm	
watt	12W	
beam angle	120°	



	colour temp.	colour
<b>LANT-ALYSON/P1 BCO</b> 8031440361538		
lumen	1300 lm	
<b>LANT-ALYSON/P1</b> 8031440361569		
lumen	1300 lm	
watt	12W	
beam angle	120°	

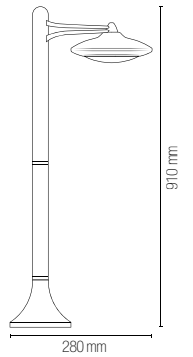

# BITT

Lampada in alluminio a LED integrato finitura antracite e corten goffrato.  
Aluminum collection anthracite and corten colour built-in LED.




technical information **BITT**




- Materiale**  
alluminio
- Colore**  
goffrato antracite  
goffrato corten
- Temperatura colore**  
4000K
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite  
embossed corten
- Colour temperature**  
4000K
- Selectable color temperature**  
3000K / 4000K
- Driver**  
built-in



	colour temp.	colour
<b>LED-BITT-P28-ANT</b> 8031414883011 lumen		
<b>LED-BITT-P28-BRO</b> 8031414883028 lumen		
watt	10W	
beam angle	120°	




	colour temp.	colour
<b>LED-BITT-P76-ANT</b> 8031414883035 lumen		
<b>LED-BITT-P76-BRO</b> 8031414883042 lumen		
watt	10W	
beam angle	120°	



# NISMO

Collezione in alluminio a LED integrato finitura bianco goffrato.  
Aluminum collection LED lamp white embossed finish.



outdoor use accommodation areas use

**Materiale**  
alluminio

**Colore**  
goffrato bianco

**Temperatura colore**

4000K

**Driver**  
integrato

**Material**  
aluminum

**Colour**  
embossed white

**Colour temperature**

4000K


**Driver**  
built-in



**LED-NISMO-AP**  
8031440361224  
lumen

colour temp. colour  
1440 lm



watt 12W  
beam angle 120°



**LED-NISMO-P60**  
8031440361231  
lumen

colour temp. colour  
1440 lm


watt 12W  
beam angle 120°

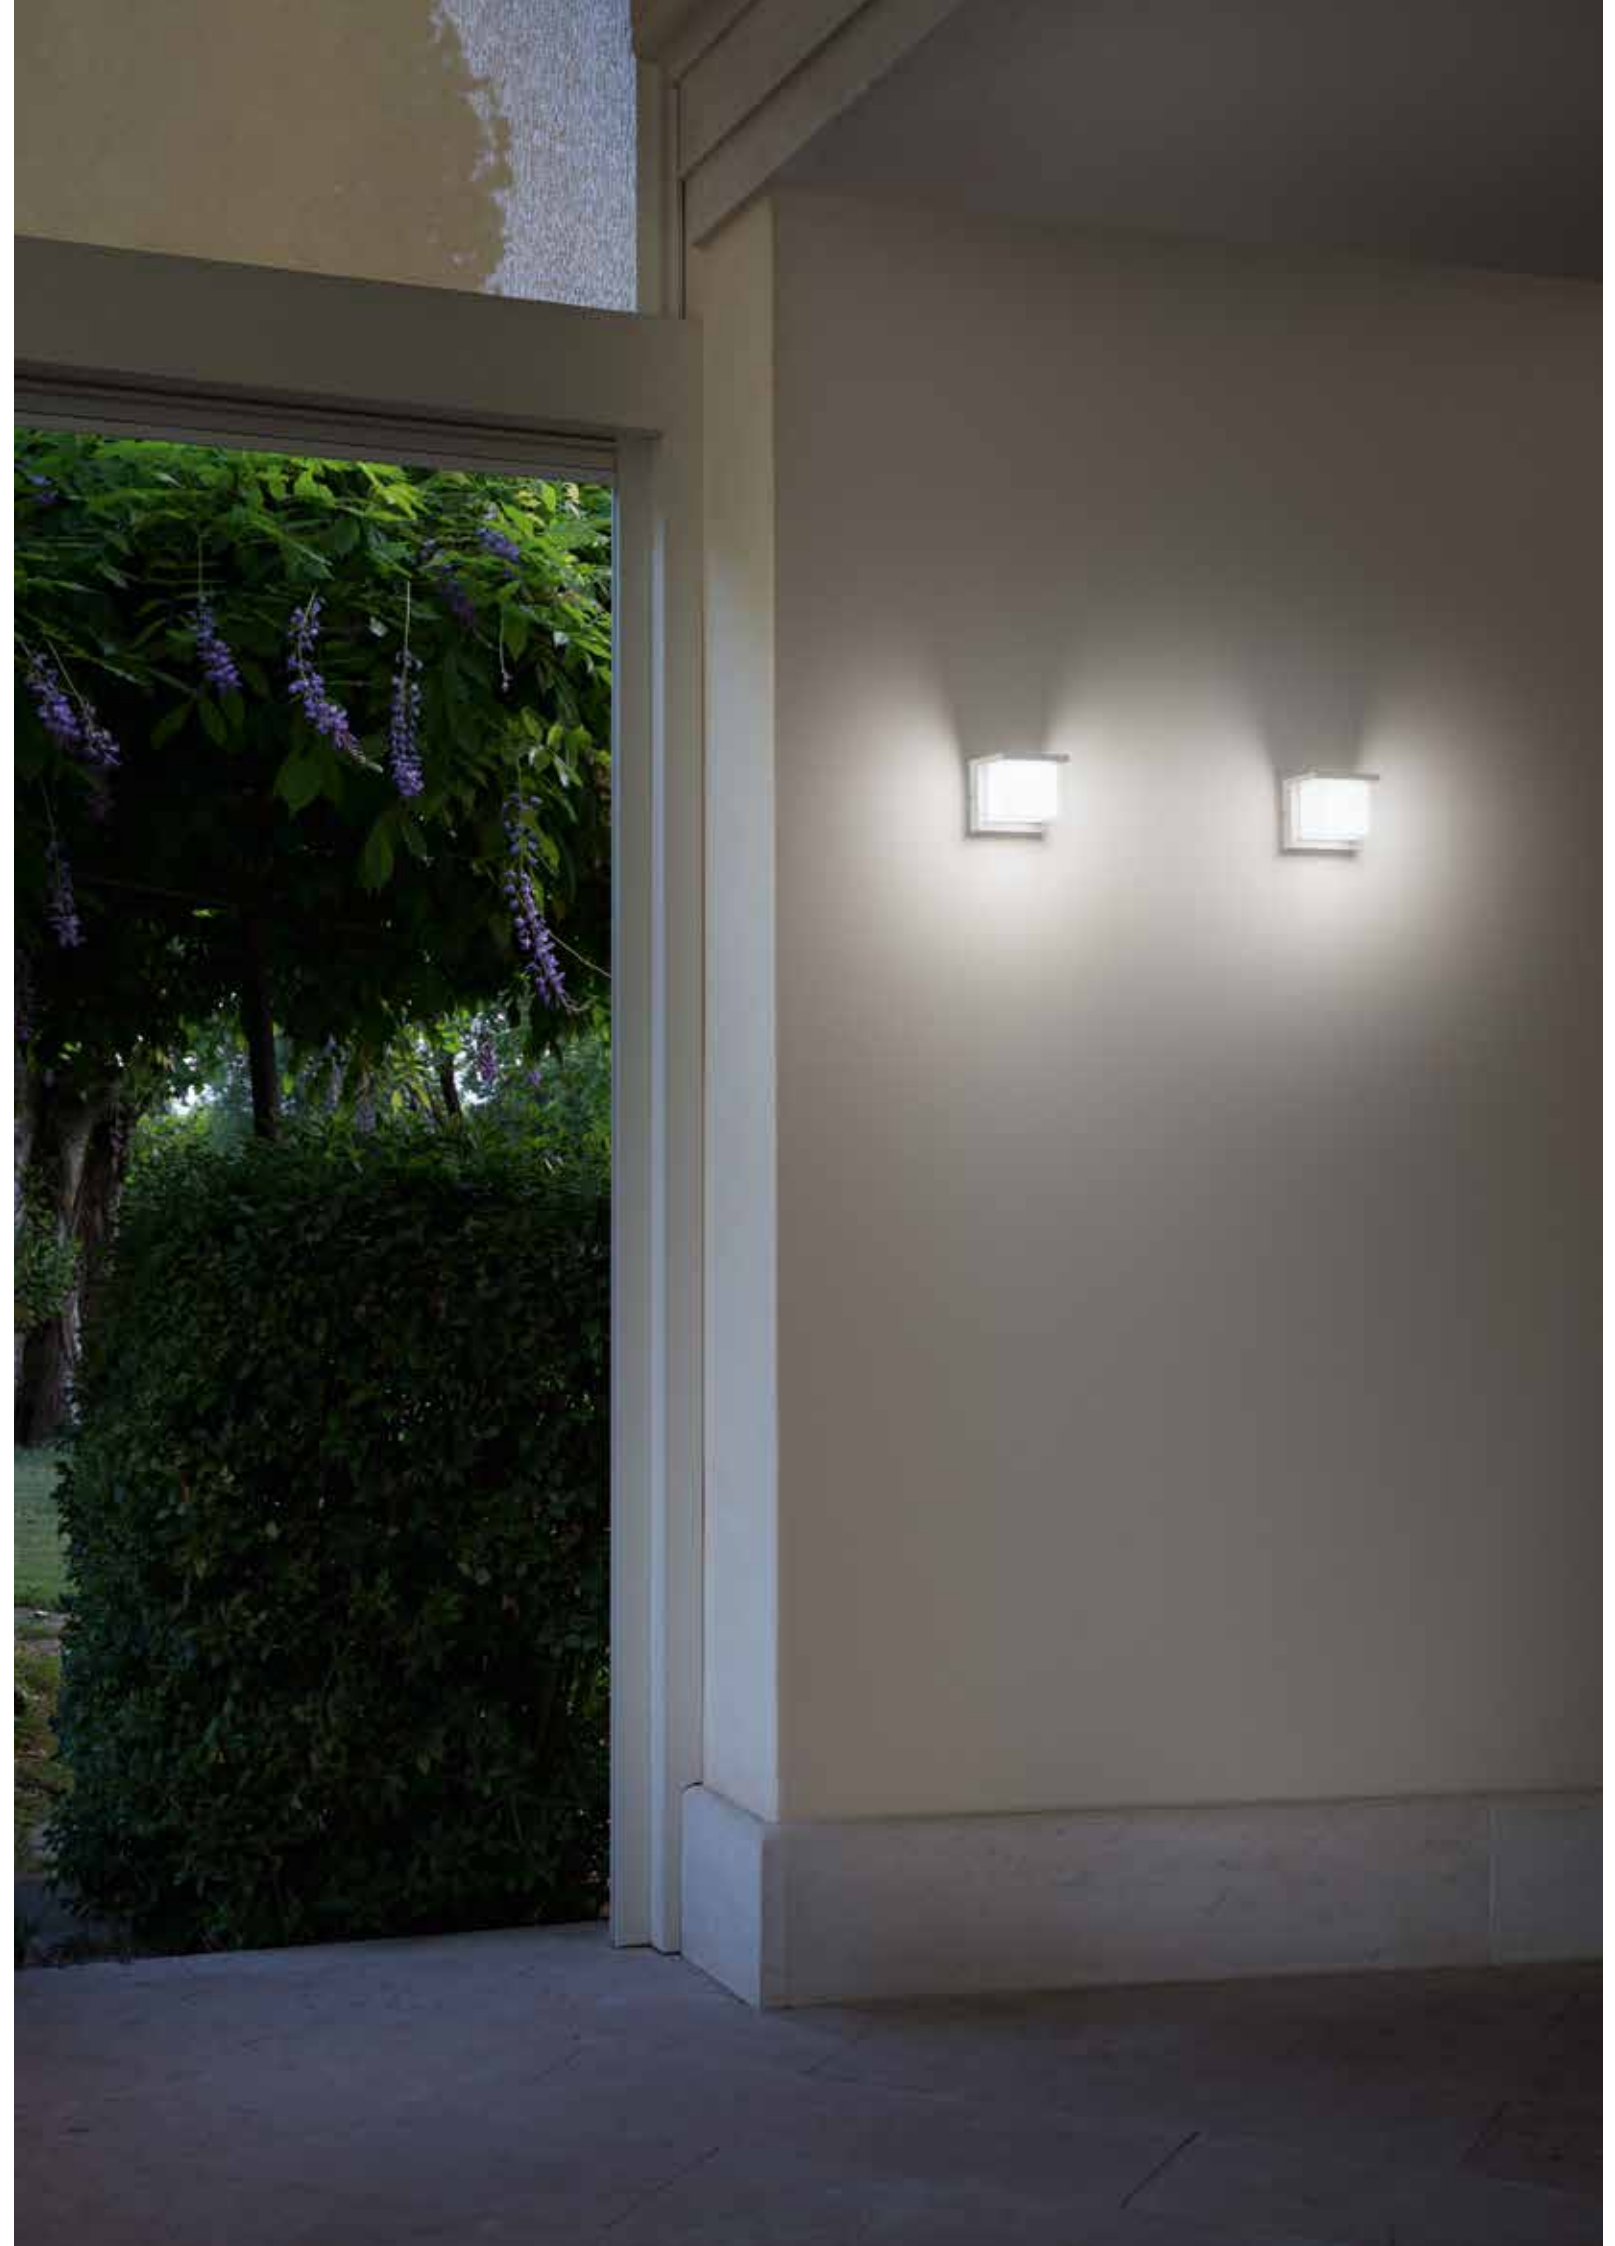



# STATION

Collezione in acciaio finitura antracite.  
 Diffusore in policarbonato bianco.  
 Stainless steel collection anthracite finish.  
 White PC diffuser.

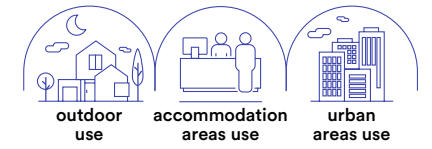


colour

**I-STATION-E27-SC2**  
 8031414879571

1 x E27 MAX 60W



Plug 2X max 15A 250V 2500W




colour

**I-STATION-SC2**  
 8031414879564




Plug 2X max 15A 250V 2500W



Lampadina non inclusa /  
 Light bulb not included

# UNDERWOOD

Collezione in metallo finitura antracite o corten.  
Metal collection anthracite or corten finish.

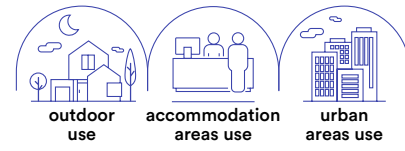


technical information **UNDERWOOD**



	colour
<b>I-UNDERWOOD-P70-ANT</b> 8031414883059	
<b>I-UNDERWOOD-P70-BRO</b> 8031414883066	
4 x G9 LED	10W




Lampadina non inclusa /  
Light bulb not included



# FOCUS

Collezione a LED in policarbonato nei colori bianco e nero.  
LED polycarbonate collection in black and white colors.

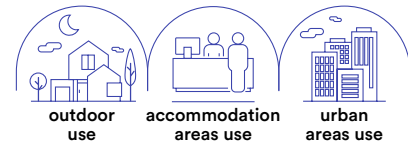



technical information **FOCUS**



**I-FOCUS-R-AP-BCO**  
8031414916290  
**I-FOCUS-R-AP-NER**  
8031414916283

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /  
IP65 connector included





Lampadina non inclusa /  
Light bulb not included




**I-FOCUS-Q-AP-BCO**  
8031414916313  
**I-FOCUS-Q-AP-NER**  
8031414916306

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /  
IP65 connector included





Lampadina non inclusa /  
Light bulb not included



**I-FOCUS-R-P-BCO**  
8031414916252  
**I-FOCUS-R-P-NER**  
8031414916245

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /  
IP65 connector included



Picchetto per installazione  
nel terreno incluso /  
Picchetto per installazione  
nel terreno non incluso /





Lampadina non inclusa /  
Light bulb not included



**I-FOCUS-Q-P-BCO**  
8031414916276  
**I-FOCUS-Q-P-NER**  
8031414916269

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /  
IP65 connector included




Picchetto per installazione  
nel terreno incluso /  
Picchetto per installazione  
nel terreno non incluso /



Lampadina non inclusa /  
Light bulb not included

# DARK

Collezione in acciaio inox con diffusore in policarbonato. Disponibile in antracite.  
Stainless steel collection with polycarbonate diffuser. Available in anthracite.

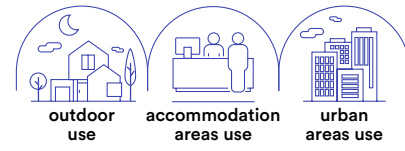

technical information **DARK**




colour

**I-DARK-AP1**  
8031414918775




1 x E27 MAX 25W




**I-DARK-AP1-S**  
8031414919093



1 x E27 MAX 25W



**Accessori inclusi / Included accessories**



Sensore di movimento regolabile  
distanza max 10m 100° /  
Adjustable motion sensor  
max distance 10m 100°




colour

**I-DARK-AP2**  
8031414919109



2 x E27 MAX 25W




colour

**I-DARK-APV**  
8031414919116



1 x E27 MAX 25W




colour

**I-DARK-P1**  
8031414918782





1 x E27 MAX 25W



Lampadina non inclusa /  
Light bulb not included


# TOKYO

Collezione in acciaio inox con diffusore in policarbonato.  
Finiture bianco, bronzo, nikel spazzolato e grigio antracite.  
Stainless steel collection with polycarbonate diffuser.  
White, bronze, brushed nickel and anthracite grey finishes.

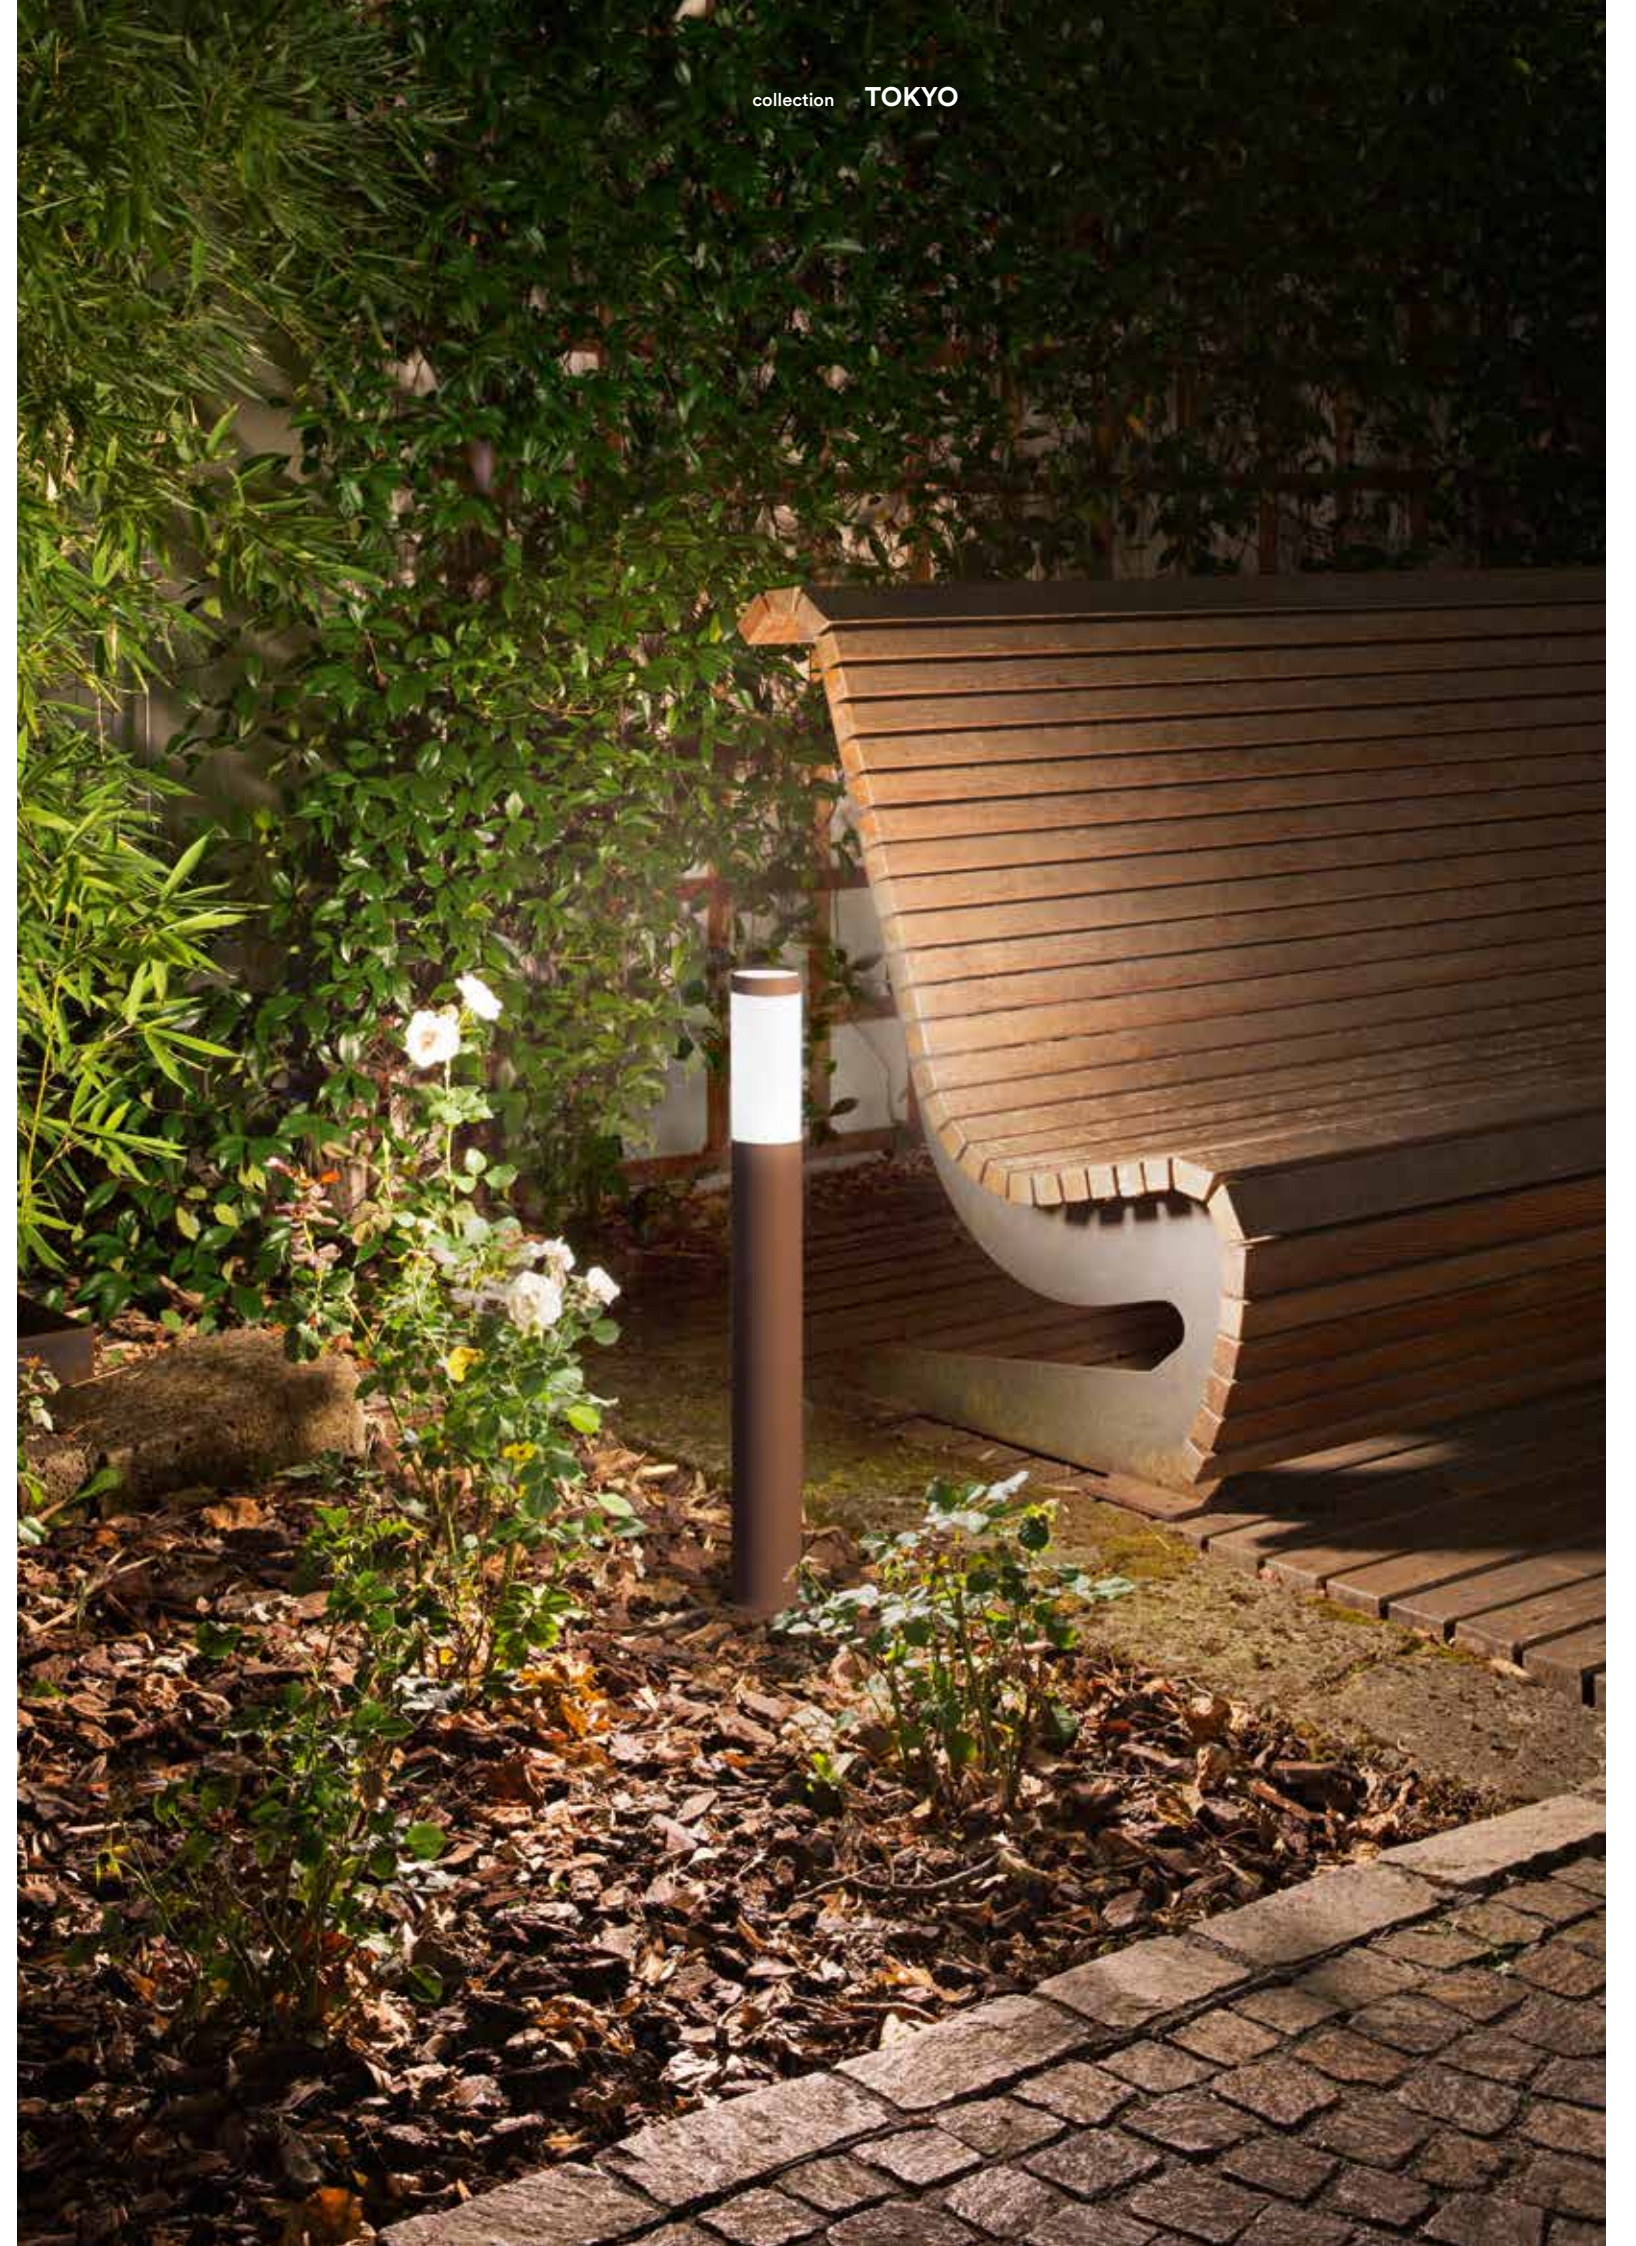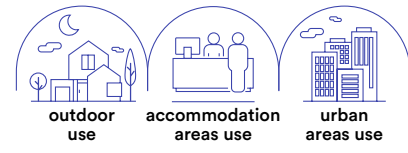

collection TOKYO






- |  |   |
|--|---|
| <b>I-TOKYO-AP BCO</b><br>8031414864447 | ● |
| <b>I-TOKYO-AP ANT</b><br>8031414888795 | ● |
| <b>I-ST021</b><br>8031421451081        | ● |
| <b>I-TOKYO-AP BRO</b><br>8031414864423 | ● |

colour

- Lampadina consigliata / Suggested light bulb
- Lampadina non inclusa / Light bulb not included

1 x E27 MAX 40W




- |                                       |   |
|---------------------------------------|---|
| <b>I-TOKYO-P BCO</b><br>8031414864416 | ● |
| <b>I-TOKYO-P ANT</b><br>8031414888801 | ● |
| <b>I-ST022-1100</b><br>8031421661084  | ● |
| <b>I-TOKYO-P BRO</b><br>8031414864393 | ● |

colour

- Lampadina consigliata / Suggested light bulb
- Lampadina non inclusa / Light bulb not included

1 x E27 MAX 40W




- |   |   |
|---|---|
| <b>I-TOKYO-P70 BCO</b><br>8031414875320 | ● |
| <b>I-TOKYO-P70 ANT</b><br>8031414888818 | ● |
| <b>I-ST022-700</b><br>8031414877225     | ● |
| <b>I-TOKYO-P70 BRO</b><br>8031414871780 | ● |

colour

- Lampadina consigliata / Suggested light bulb
- Lampadina non inclusa / Light bulb not included

1 x E27 MAX 40W

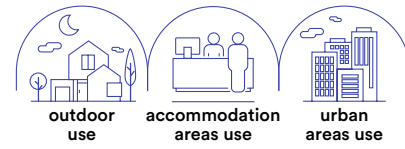

**Materiale**  
alluminio

**Colore**  
goffrato antracite

**Temperatura colore**  
3000K

**Driver**  
DC24V  
tensione costante  
non incluso

**Material**  
aluminum

**Colore**  
goffrato antracite

**Colour temperature**  
3000K

**Driver**  
DC24V  
constant voltage  
not included




Driver p. 843-852  
Controller p. 854-857



**LED-WAX-P120**  
8031414922956  
lumen

colour temp.	colour
363lm	

watt	3W
beam angle	120°
pf	0.90




Picchetto per installazione  
nel terreno incluso /  
Picchetto per installazione  
nel terreno non incluso /



# PUCK

Collezione in alluminio a LED integrato con finitura antracite o corten goffrato.  
Aluminum collection with integrated LED with anthracite or corten embossed finish.

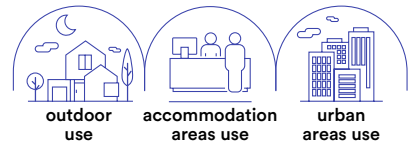

**Materiale**  
alluminio

**Colore**  
goffrato antracite  
goffrato corten



**Temperatura colore**  
3000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Material**  
aluminum

**Colour**  
goffrato antracite  
goffrato corten



**Colour temperature**  
3000K



**Driver**  
DC24V  
constant voltage  
not included





**LED-PUCK-P120-ANT**  
8031414918652  
lumen

colour temp.	colour
360 lm	

**LED-PUCK-P120-BRO**  
8031414918669  
lumen


360 lm	

watt	3W
beam angle	180°

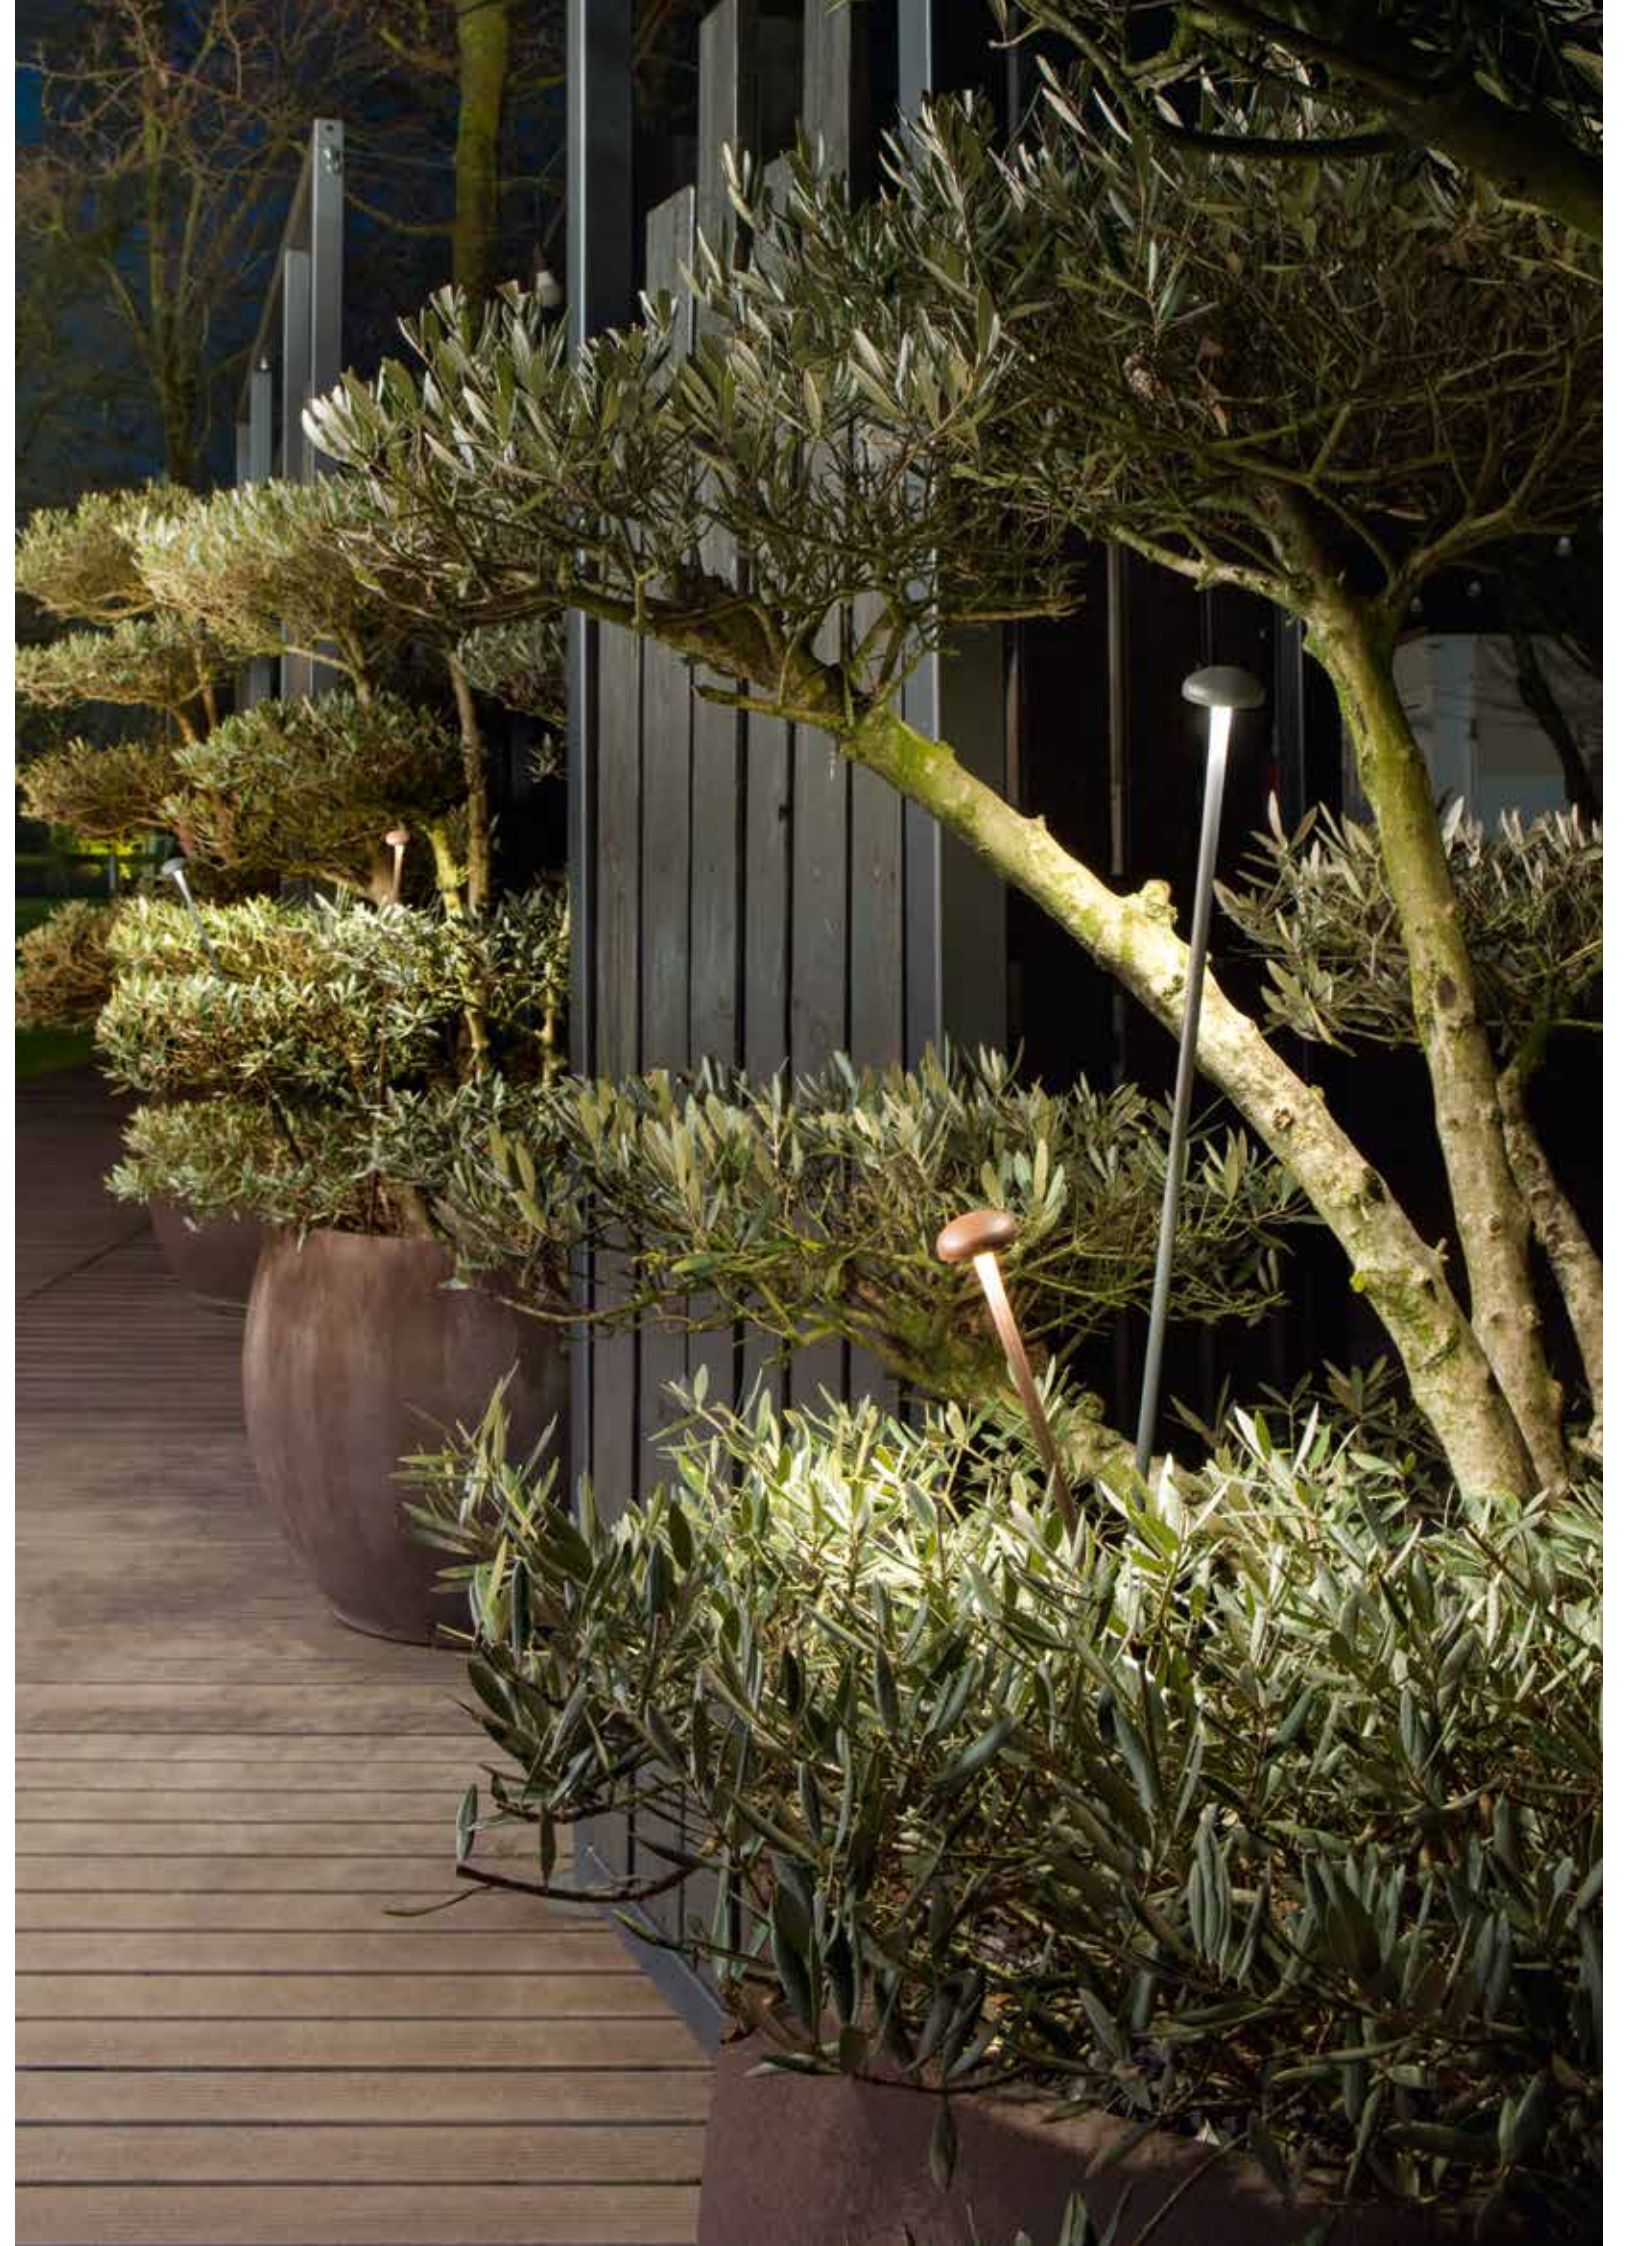

# DROP

Collezione in alluminio finitura antracite con diffusore in policarbonato.  
Aluminum collection anthracite finish with PC diffuser.

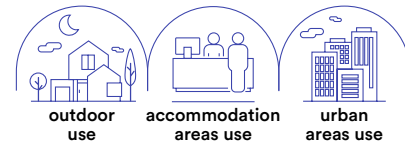

technical information **DROP**




**I-DROP-P33-ANT**  
8031414883073

colour



1 x G9 LED



Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included




**I-DROP-P53-ANT**  
8031414883080

colour



1 x G9 LED



Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included




**I-DROP-P73-ANT**  
8031414882793

colour



1 x G9 LED




Lampadina consigliata / Suggested light bulb




Lampadina non inclusa / Light bulb not included

# BOOSTER

Collezione in metallo finitura silver.  
Metal collection silver finish.

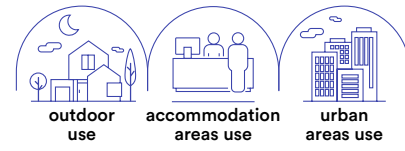

technical information **BOOSTER**

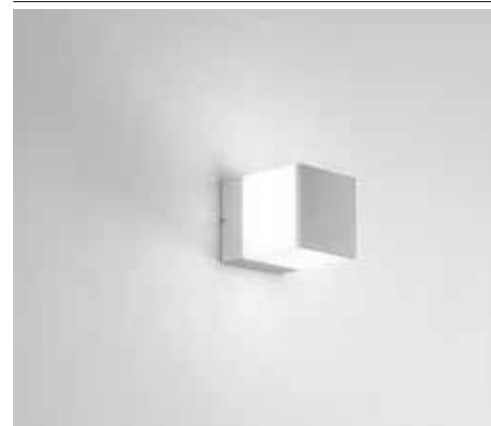


**I-BOOSTER-AP**  
8031414918492

colour



1 x E27 MAX 40W



Lampadina non inclusa /  
Light bulb not included




**I-BOOSTER-P60**  
8031414918508

colour



1 x E27 MAX 40W



Lampadina non inclusa /  
Light bulb not included



# GECO DJ

Lampada portatile LED RGBW in polietilene con speaker bluetooth incorporato.

LED portable RGBW lamp with speaker bluetooth included polyethylene material.



collection **GECO**

**Materiale**

PE

**Temperatura colore**

RGB + 4000K



**Driver**

incluso

**Material**

PE

**Colour temperature**

RGB + 4000K



**Driver**

included



**I-GECO-DJ-L25**

8031414862542

lumen

watt

colour temp.  
RGB + 180 lm - 8h



3W

**Accessori inclusi / Included accessories**



Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz




Telecomando infrarossi / IR remote control



Speaker 10W Bluetooth 4.0, distanza connessione max 15 m, durata 2h / 10w speaker bluetooth 4.0 connection distance max 15 m, lasting time 2h



Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable





**Materiale**

PE

**Temperatura colore**

RGB + 4000K



**Driver**

incluso

**Material**

PE

**Colour temperature**

RGB + 4000K



**Driver**

included



**Accessori inclusi / Included accessories**

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz **IP20**

Telecomando infrarossi / IR remote control



**6 hours** Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

	colour temp.
<b>I-GECO-VASO-Q-L</b> 8031414862535 lumen	+  RGB 240 lm - 8h
<b>I-GECO-VASO-Q-XL</b> 8031414864713 lumen	+  RGB 240 lm - 8h
watt	4W



	colour temp.
<b>I-GECO-VASO-R-L</b> 8031414862528 lumen	+  RGB 240 lm - 8h
<b>I-GECO-VASO-R-XL</b> 8031414864720 lumen	+  RGB 240 lm - 8h
watt	4W

	colour temp.
<b>I-GECO-SFERA-L30</b> 8031414862436 lumen	+  RGB 240 lm - 8h
<b>I-GECO-SFERA-L40</b> 8031414862443 lumen	+  RGB 240 lm - 8h
<b>I-GECO-SFERA-L50</b> 8031414862450 lumen	+  RGB 240 lm - 8h
watt	4W

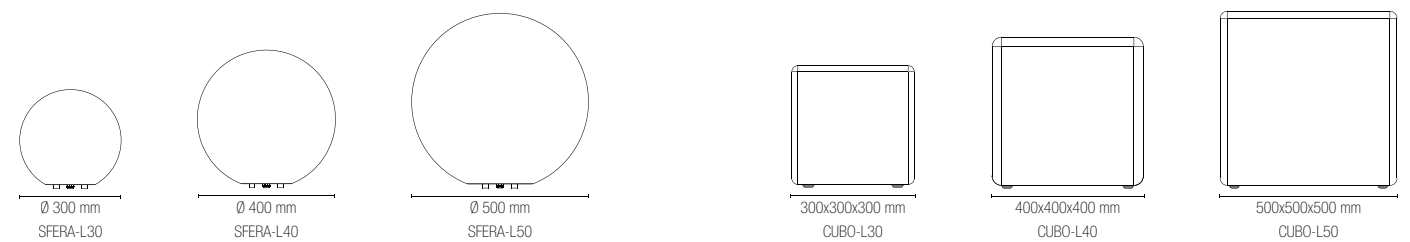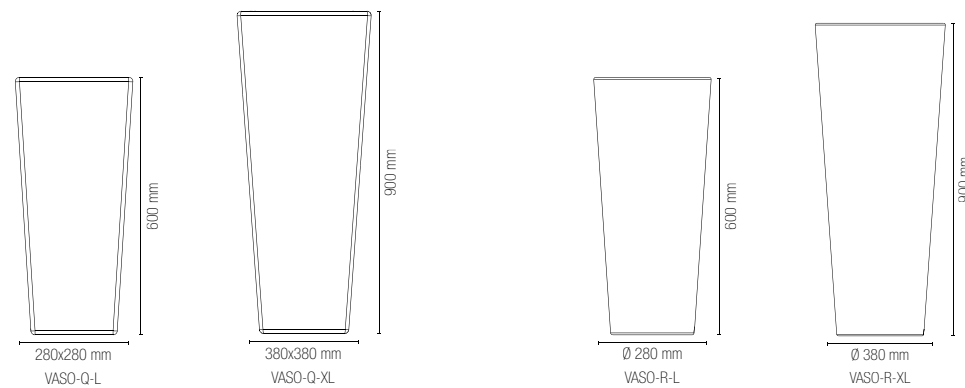	colour temp.
<b>I-GECO-CUBO-L30</b> 8031414862467 lumen	+  RGB 240 lm - 8h
<b>I-GECO-CUBO-L40</b> 8031414862474 lumen	+  RGB 240 lm - 8h
<b>I-GECO-CUBO-L50</b> 8031414862481 lumen	+  RGB 240 lm - 8h
watt	4W





Lampada LED RGBW classe F / LED RGBW bulb class F	colour temp.
<b>KLASSIC-E27-RGBW</b> 8031414905003	 +  RGB 806 lm
watt	9W
beam angle	300°



IR Control system


Lampadine LED Intec consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION / Suggested LED Intec bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION





# GECO E27

Collezione di lampade con attacco E27 in polietilene.  
PE lamp with E27 lampholder.

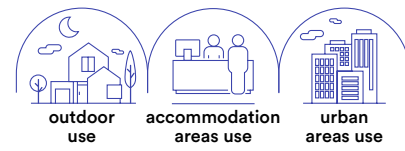


collection **GECO E27**




**I-GECO-SFERA-S30**  
8031414864461

1 x E27 MAX 42W




**I-GECO-SFERA-S40**  
8031414864454

1 x E27 MAX 42W

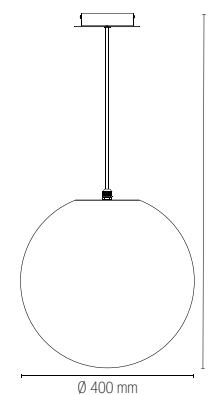

Lampadina non inclusa /  
Light bulb not included

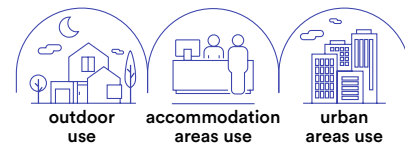

**I-GECO-VASO-E-Q-L**  
8031414868506  
**I-GECO-VASO-E-Q-XL**  
8031414868131

1 x E27 MAX 42W




**I-GECO-VASO-E-R-L**  
8031414868513  
**I-GECO-VASO-E-R-XL**  
8031414868520

1 x E27 MAX 42W



**I-GECO-SFERA-E-L30**  
8031414868476  
**I-GECO-SFERA-E-L40**  
8031414868483  
**I-GECO-SFERA-E-L50**  
8031414868490

1 x E27 MAX 42W




**I-GECO-SPK**  
8031414878437  
Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family








**I-GECO-CUBO-E-L30**  
8031414867943  
**I-GECO-CUBO-E-L40**  
8031414868117  
**I-GECO-CUBO-E-L50**  
8031414868124

1 x E27 MAX 42W




**I-GECO-SPK**  
8031414878437  
Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family

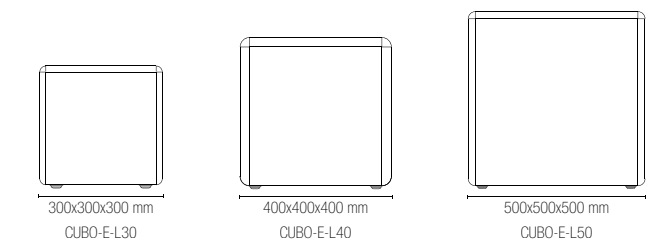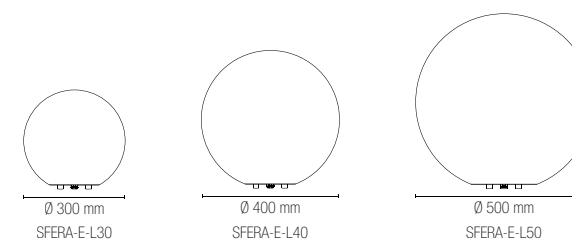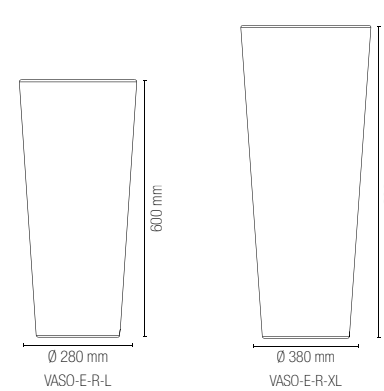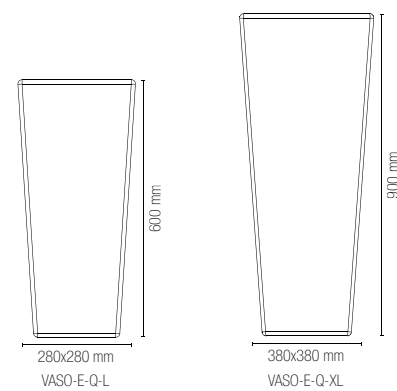

# GECO E27

Piantana in polietilene con struttura in metallo bianco opaco o antracite.  
PE floor lamp with metal structure white or anthracite colour.






colour 

**I-GECO-BAR-PT**  
8031414868599

1 x E27 MAX 42W

**Accessori inclusi / Included accessories**


 Cavo 2,5 m con spina shuko / 2,5 m of cable with schuko plug 

 Lampadina non inclusa / Light bulb not included



technical information **GECO E27**






colour 

**I-GECO-SFERA-PT30**  
8031414864430

1 x E27 MAX 42W

**Accessori inclusi / Included accessories**

 Cavo 2,5 m con spina shuko / 2,5 m of cable with schuko plug 

 Lampadina non inclusa / Light bulb not included



# GECO LED SOLAR

Lampada portatile e galleggiante LED RGBW in polietilene con autoricarica solare.  
PE LED portable and floating RGBW lamp with solar self charge.



## Materiale

PE

## Temperatura colore

RGB + 4000K



## Driver

incluso

## Material

PE


## Colour temperature

RGB + 4000K



## Driver

included



## Accessori inclusi / Included accessories



Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz



Telecomando infrarossi / IR remote control




**Carica alimentatore / DC charge**  
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



**Carica solare / Auto solar charge**  
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable


	colour temp.
<b>I-GECO-SFERA-SOL30</b> 8031414870868 lumen	+  RGB 90 lm - 12h
<b>I-GECO-SFERA-SOL40</b> 8031414870875 lumen	+  RGB 90 lm - 12h

watt 1,5W



	colour temp.
<b>I-GECO-CUBO-SOL30</b> 8031414870837 lumen	+  RGB 90 lm - 12h
<b>I-GECO-CUBO-SOL40</b> 8031414870844 lumen	+  RGB 90 lm - 12h


watt 1,5W

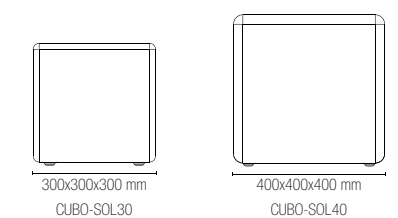



# MANDALA

Collezione in metallo antracite con diffusore in vetro trasparente.  
Metal collection anthracite finish with transparent glass diffuser.




Lampadina consigliata /  
Suggested light bulb



Lampadina non inclusa /  
Light bulb not included


**LANT-MANDALA/S1**  
8031414870684

1 x E27 MAX 60W



**LANT-MANDALA/AP**  
8031414862641

1 x E27 MAX 60W



In.tec light **OUTDOOR** APPLIQUE, SCOPERSONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



# YORK

Collezione in alluminio nero con diffusore in policarbonato.  
Black aluminum collection with PC diffuser.




Lampadina consigliata /  
Suggested light bulb



Lampadina non inclusa /  
Light bulb not included

**LANT-YORK/S1**  
8031414862764

1 x E27 MAX 60W




colour



**LANT-YORK/AP**  
8031414862757

1 x E27 MAX 60W



colour



# PAVÈ

Proiettore in metallo color antracite con diffusore trasparente lucido nero in vetro.  
Anthracite-colored metal projector with transparent glossy black glass diffuser.

## Materiale

metallo  
diffusore  
vetro trasparente

## Colore

antracite

## Temperatura colore

3000K / 4000K



## Driver

integrato

## Material

metal  
transparent glass  
diffuser

## Colour

anthracite

## Colour temperature

3000K / 4000K




## Driver

built-in




technical information PAVÈ

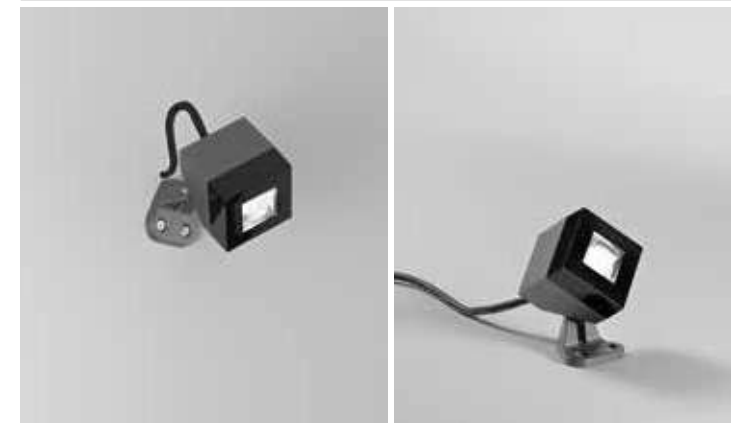


	colour temp.	colour
<b>LED-PAVE-6</b> 8031414922925		
lumen	720 lm	

watt	6W
beam angle	45°
pf	-




	colour temp.	colour
<b>LED-PAVE-18</b> 8031414922932		
lumen	2215 lm	

watt	18W
beam angle	45°
pf	-



	colour temp.	colour
<b>LED-PAVE-30</b> 8031414922949		
lumen	3750 lm	

watt	30W
beam angle	45°
pf	0.90



# LUMINA

Collezione in metallo color antracite con punto luce LED integrato.  
 Lumina applique può essere utilizzato anche come segnapassi.  
 Anthracite-colored metal collection with integrated LED light point.  
 Lumina wall lamp can also be used as a step marker.




technical information **LUMINA**




- Materiale**  
alluminio
- Colore**  
goffrato antracite
- Temperatura colore**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
3000K / 4000K
- Driver**  
built-in




	colour temp.	colour
<b>LED-LUMINA-AP</b> 8031414922864	1440 lm	
watt	12W	
beam angle	120°	
pf	-	



	colour temp.	colour
<b>LED-LUMINA-P80</b> 8031414922871	1440 lm	
watt	12W	
beam angle	120°	
pf	-	



	colour temp.	colour
<b>LED-LUMINA-P200</b> 8031414922888	3690 lm	
watt	30W	
beam angle	120°	
pf	0.90	

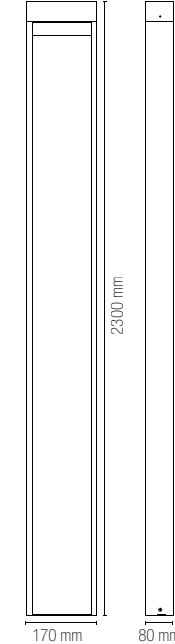


OUTDOOR APPLIQUE SCSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

In.tec light



# MIRAGE


Lanterna in metallo colore bianco o antracite diffusore in vetro trasparente.  
Metal lantern white or anthracite finish with clear glass diffuser.

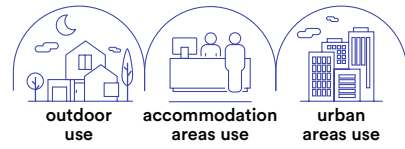

technical information **MIRAGE**




	colour
<b>LANT-MIRAGE-AP-BCO</b> 8031414896394	●
<b>LANT-MIRAGE-AP</b> 8031414867059	●
1 x E27 MAX 60W	




Lampadina non inclusa /  
Light bulb not included



	colour
<b>LANT-MIRAGE-S1-BCO</b> 8031414896431	●
<b>LANT-MIRAGE-S1</b> 8031414867066	●
1 x E27 MAX 60W	



	colour
<b>LANT-MIRAGE-L1-BCO</b> 8031414896400	●
<b>LANT-MIRAGE-L1</b> 8031414869190	●
1 x E27 MAX 60W	




**Accessori inclusi / Included accessories**


Cavo 2,5 m  
con spina shuko /  
2,5 m of cable  
with schuko plug



	colour
<b>LANT-MIRAGE-P90-BCO</b> 8031414896424	●
<b>LANT-MIRAGE-P90</b> 8031414869206	●
1 x E27 MAX 60W	



	colour
<b>LANT-MIRAGE-P200-BCO</b> 8031414896417	●
<b>LANT-MIRAGE-P200</b> 8031414869213	●
1 x E27 MAX 60W	



OUTDOOR APPLIQUE SCSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

In.tec light




**Collezione in alluminio pressofuso colore antracite con diffusore in PC.**  
Collection in die-cast aluminum in anthracite colour with PC diffuser.



colour

**I-SKITTLE-AP**  
8031414881819


1 x E27 MAX 28W



colour

**I-SKITTLE-PL**  
8031414881826


1 x E27 MAX 28W



colour

**I-SKITTLE-P65**  
8031414881833


1 x E27 MAX 28W



colour

**I-SKITTLE-P100**  
8031414882434

1 x E27 MAX 28W




Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included

# ORBIT

Lantern in acrilico PMMA e base in alluminio pressofuso nero.  
Acrylic PMMA lantern with base in die cast aluminum black finish.

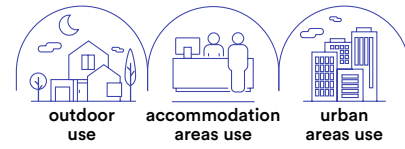


technical information **ORBIT**



colour   
**LANT-ORBIT/AP**  
8031414862658

1 x E27 MAX 60W




Lampadina non inclusa /  
Light bulb not included




colour   
**LANT-ORBIT/S1**  
8031414862665

1 x E27 MAX 60W




colour   
**LANT-ORBIT/L1**  
8031414866335

1 x E27 MAX 60W




colour   
**LANT-ORBIT/P1**  
8031414862689

1 x E27 MAX 60W

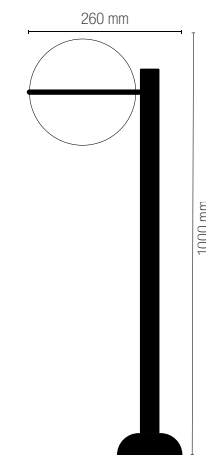

colour   
**LANT-ORBIT/P3**  
8031414862702

3 x E27 MAX 60W

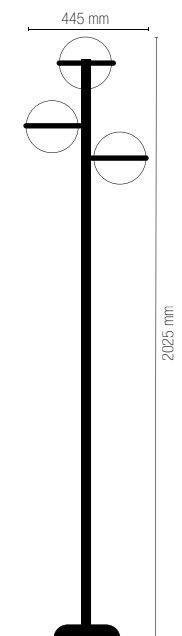

# PRISMA

Lanterna in alluminio pressofuso colore antracite diffusore in vetro trasparente.  
Die cast aluminum lantern anthracite finish with clear glass diffuser.




technical information **PRISMA**



colour

**LANT-PRISMA/APIA**  
8031414867103


1 x E27 MAX 60W



colour

**LANT-PRISMA/APIB**  
8031414867073


1 x E27 MAX 60W



colour

**LANT-PRISMA/S1**  
8031414867080


1 x E27 MAX 60W



colour

**LANT-PRISMA/P1**  
8031414869183

1 x E27 MAX 60W



Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included

# ROMA

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.  
Die-cast aluminum lantern with clear glass diffuser.



technical information **ROMA**



colour


**LANT-ROMA/APIA BCO**  
8031434661217



**LANT-ROMA/APIA**  
8031430751172



1 x E27 MAX 60W




colour

**LANT-ROMA/APIA-S**  
8031435921235



1 x E27 MAX 60W



colour


**LANT-ROMA/API1B BCO**  
8031434671216



**LANT-ROMA/API1B**  
8031430761171



1 x E27 MAX 60W



colour


**LANT-ROMA/S1 BCO**  
8031434681215



**LANT-ROMA/S1**  
8031430791178



1 x E27 MAX 60W



colour

**LANT-ROMA/L1 BCO**  
8031436951248



**LANT-PALETTO**  
8031414042203



1 x E27 MAX 60W



colour


**LANT-ROMA/P1 BCO**  
8031436941249



**LANT-ROMA/P1**  
8031430771170



1 x E27 MAX 60W




colour

**LANT-ROMA/P3**  
8031430781179



3 x E27 MAX 60W

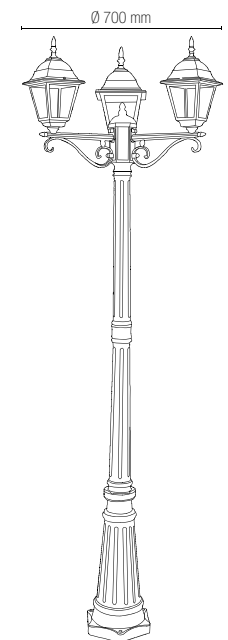


colour

**LANT-ROMA-HEAD21**  
8031414878512



1 x E27 MAX 60W

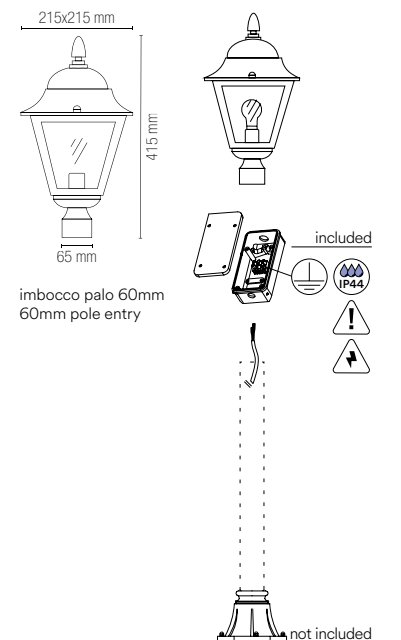

Accessori integrati /  
Built in accessories



**Sensore di movimento regolabile /  
Adjustable motion sensor**

ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	



Lampadina non inclusa /  
Light bulb not included

on photo: ROMA



on photo: MILANO



In.tec light

**OUTDOOR** APPLIQUE, SCOPERSONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

# MILANO

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.  
Die-cast aluminum lantern with clear glass diffuser.



technical information **MILANO**



colour


**LANT-MILANO/AP1A BCO**  
8031436931240



**LANT-MILANO/AP1A**  
8031436921241



1 x E27 MAX 60W



colour

**LANT-MILANO/AP1B BCO**  
8031436911242



**LANT-MILANO/AP1B**  
8031436901243



1 x E27 MAX 60W



colour


**LANT-MILANO/S1 BCO**  
8031436851234



**LANT-MILANO/S1**  
8031436841235



1 x E27 MAX 60W



colour

**LANT-MILANO/L1 BCO**  
8031436891247



**LANT-MILANO/L1**  
8031436881248



1 x E27 MAX 60W



colour


**LANT-MILANO/P1 BCO**  
8031436871232



**LANT-MILANO/P1**  
8031436971246



1 x E27 MAX 60W

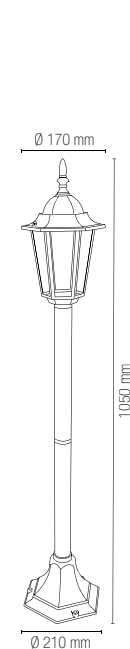

colour


**LANT-MILANO-HEAD23**  
8031414878529



**LANT-MILANO-HEAD23**  
8031414878529



1 x E27 MAX 60W

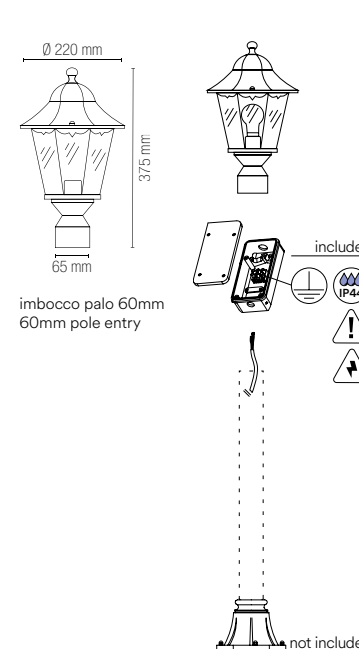


Lampadina non inclusa /  
Light bulb not included

# FIRENZE

Lanterne in alluminio pressofuso nero pennellato argento con diffusore in vetro trasparente.

Diecast aluminum lantern black brush silver with clear glass diffuser.

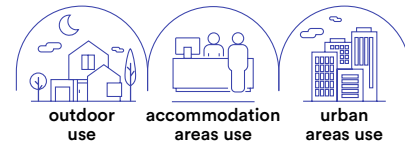



technical information FIRENZE




colour   
**LANT-FIRENZE/AP1A**  
 8031430701177


1 x E27 MAX 60W




colour   
**LANT-FIRENZE/AP1B**  
 8031430711176


1 x E27 MAX 60W



colour   
**LANT-FIRENZE/S1**  
 8031430741173


1 x E27 MAX 60W




colour   
**LANT-FIRENZE/P1**  
 8031430721175


1 x E27 MAX 60W



colour   
**LANT-FIRENZE/P3**  
 8031430731174

3 x E27 MAX 60W

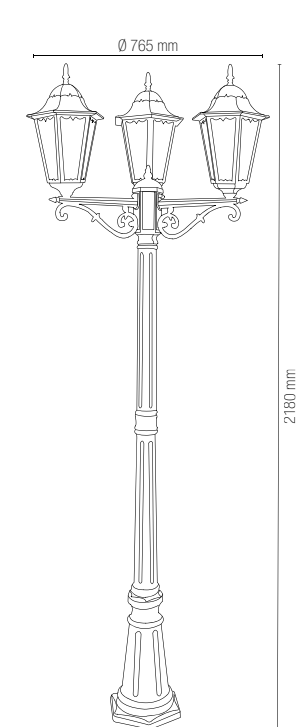

 Lampadina non inclusa / Light bulb not included



# SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente.  
Diecast aluminum lantern black brush green with clear glass diffuser.



technical information **SANTIAGO**





colour

**LANT-SANTIAGO/AP1A**  
8031430801174



1 x E27 MAX 60W




colour

**LANT-SANTIAGO/AP1B**  
8031430811173



1 x E27 MAX 60W



colour

**LANT-SANTIAGO/S1**  
8031430841170



1 x E27 MAX 60W




colour

**LANT-SANTIAGO/P1**  
8031430821172



1 x E27 MAX 60W




colour

**LANT-SANTIAGO/P3**  
8031430831171




3 x E27 MAX 60W

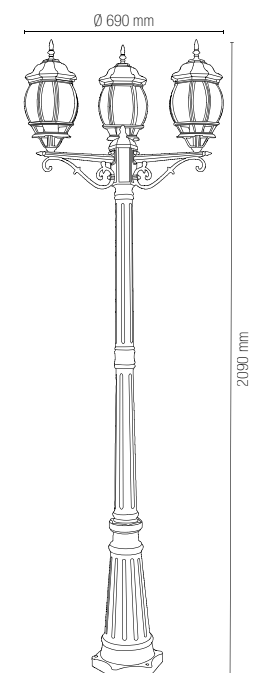

# VENEZIA

Lanterne in alluminio pressofuso con finiture in colore rame con diffusore in policarbonato trasparente.  
Aluminum die-cast lantern with copper colour finish and clear polycarbonate diffuser.

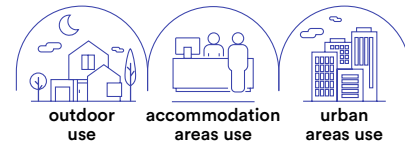

technical information **VENEZIA**




colour

**LANT-VENEZIA-AP1A**  
8031440312004



1 x E27 MAX 60W




colour

**LANT-VENEZIA-AP1B**  
8031440311991



1 x E27 MAX 60W




colour

**LANT-VENEZIA-S1**  
8031440313285



1 x E27 MAX 60W




colour

**LANT-VENEZIA-L1**  
8031440311984



1 x E27 MAX 60W

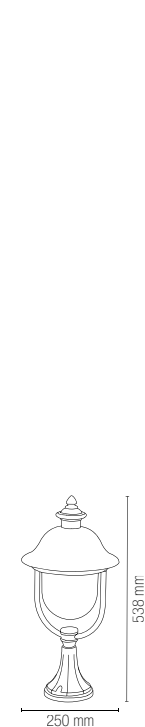


colour

**LANT-VENEZIA-P1**  
8031440313308



1 x E27 MAX 60W

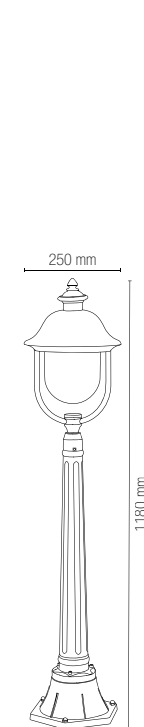


colour

**LANT-VENEZIA-P3**  
8031440313292



3 x E27 MAX 60W

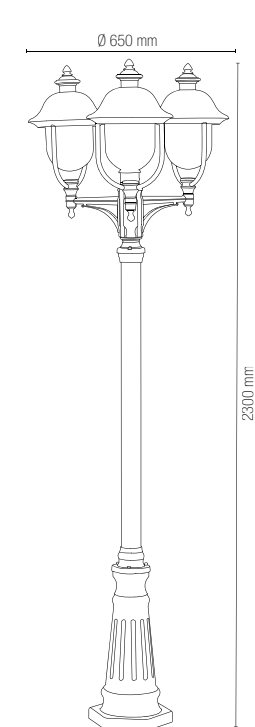



Lampadina non inclusa /  
Light bulb not included

OUTDOOR APPLIQUE, SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

In.tec light

# PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente.  
Die-cast aluminum lantern in embossed black colour with clear acrylic diffuser.

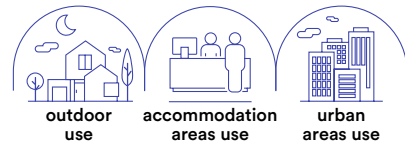

technical information **PAVIA**




colour

**LANT-PAVIA-API**  
8031440312028



1 x E27 MAX 60W




colour

**LANT-PAVIA-S1**  
8031440312042



1 x E27 MAX 60W




colour

**LANT-PAVIA-P1**  
8031440312035



1 x E27 MAX 60W

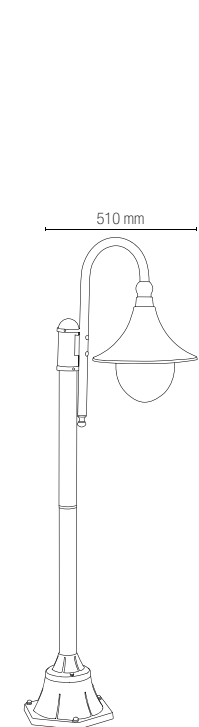


colour

**LANT-PAVIA-P3**  
8031440312011




3 x E27 MAX 60W

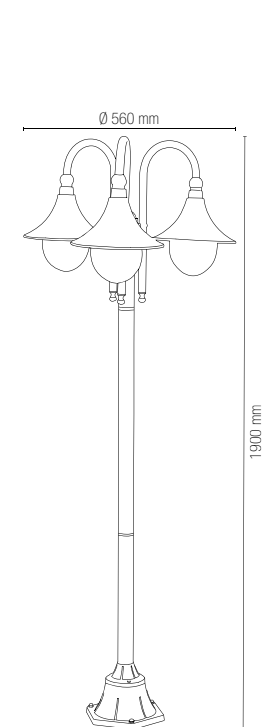

Lampadina non inclusa /  
Light bulb not included

# BRIGHTMAX



Modulo LED per lampioni con alimentatore OSRAM OT60 dali e mezzanotte virtuale  
LED module for lampposts with OSRAM OT60 dali power supply and virtual midnight.



technical information **BRIGHTMAX**




- Materiale**  
alluminio
- Colore**  
nero
- Temperatura colore**  
2700K / 4000K
- Driver incluso**
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
aluminum
- Colour**  
black
- Colour temperature**  
2700K / 4000K
- Driver included**
- Life time and on/off**  
50.000h  
>25.000 on/off

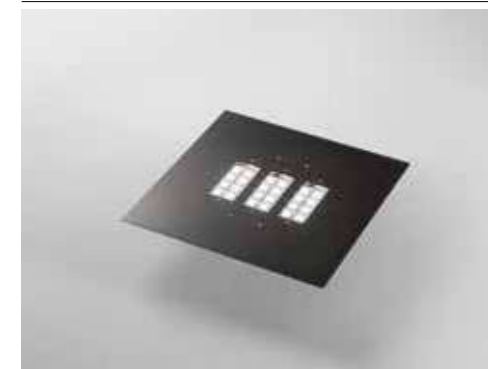


	colour temp.	colour
<b>BRIGHTMAX-60C</b> 8031414883899 lumen		
<b>BRIGHTMAX-60M</b> 8031414883905 lumen		
watt	60W	
beam angle	360°	

Fotometria del prodotto / Photometric curve




**BRIGHTMAX-LENS**  
8031414883912  
Lente bi-asimmetrico e tri-asimmetrico /  
Be-asymmetric and three-asymmetric lens

Fotometria del prodotto / Photometric curve



beam angle be-asymmetric




beam angle three-asymmetric


### Mezzanotte Virtuale / Virtual Midnight

Sistema indipendente della riduzione della luce in 5 STEP. Il modulo LED è programmato con un determinato programma (personalizzabile su richiesta) per ottimizzare il risparmio energetico durante le ore notturne. L'apparecchio prevede un sistema di autoapprendimento che determina in maniera autonoma, in base alle accensioni e agli spegnimenti pregressi, il punto di Mezzanotte Virtuale. La Mezzanotte Virtuale è il punto che determina la riduzione di flusso in base al profilo impostato, lasciando invariato l'impianto. Per un corretto funzionamento del sistema Mezzanotte Virtuale è necessario un'accensione e uno spegnimento regolare quotidiano.

Independent system of light reduction in 5 steps. The LED module is set with a specific program (customizable) to optimize the energy saving time during night hours. The device is equipped with a auto-feedback system which determine independently, the Virtual Midnight point based on the past switch on-switch-off time record. Virtual Midnight is the point which determines the light flux reduction based on the set profile, keeping the electrical system untouched. For a correct working of the system of Virtual Midnight it is necessary a daily regular cycle of switching on-off.

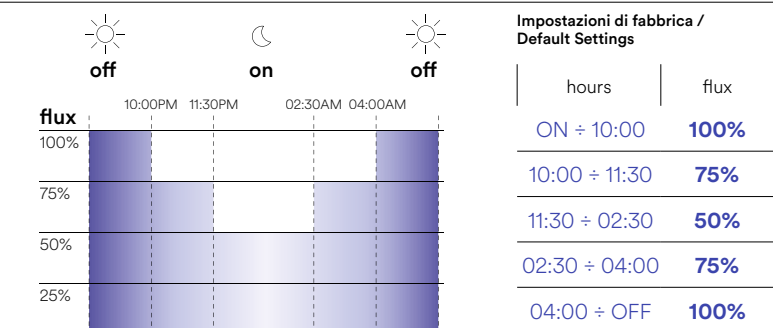

## OUTDOOR

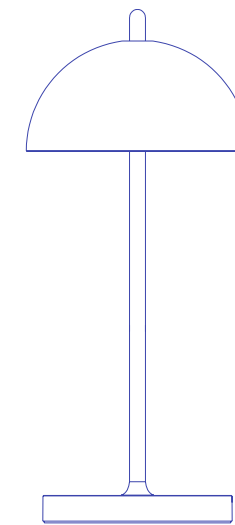

LAMPADE DA TAVOLO RICARICABILI  
RECHARGEABLE TABLE LAMP

# PARTY

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



## Materiale

metallo

## Colore

goffrato bianco  
goffrato nero  
goffrato verde  
goffrato oro  
goffrato crema  
goffrato corten



## Temperatura colore

3000K



## Material

metal

## Colour

embossed white  
embossed black  
embossed green  
embossed gold  
embossed cream  
embossed corten





## Colour temperature

3000K



	colour temp.	colour		colour temp.	colour
<b>LED-PARTY-S-BCO</b> 8031414915941 lumen			<b>LED-PARTY-L-BCO</b> 8031414916009 lumen		
134 lm - 12h			350 lm - 12h		
<b>LED-PARTY-S-NER</b> 8031414915934 lumen			<b>LED-PARTY-L-NER</b> 8031414915996 lumen		
134 lm - 12h			350 lm - 12h		
<b>LED-PARTY-S-VDE</b> 8031414915972 lumen			<b>LED-PARTY-L-VDE</b> 8031414916030 lumen		
134 lm - 12h			350 lm - 12h		
<b>LED-PARTY-S-ORO</b> 8031414915989 lumen			<b>LED-PARTY-L-ORO</b> 8031414916047 lumen		
134 lm - 12h			350 lm - 12h		
<b>LED-PARTY-S-CRM</b> 8031414915965 lumen			<b>LED-PARTY-L-CRM</b> 8031414916023 lumen		
134 lm - 12h			350 lm - 12h		
<b>LED-PARTY-S-BRO</b> 8031414915958 lumen			<b>LED-PARTY-L-BRO</b> 8031414916016 lumen		
134 lm - 12h			350 lm - 12h		
watt		1,5W	watt		2,5W



Accessorio non incluso /  
Not included accessory



Adattatore DC5V 1A /  
Adaptor DC5V 1A

Accessori inclusi /  
Included accessories



Cavo per ricarica  
magnetico /  
Magnetic  
charging cable



**5-7 hours** **DC3.7V 4000 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable





# LIBERTY

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



**Materiale**  
metallo

**Colore**  
goffrato bianco  
goffrato nero  
goffrato cromo lucido  
goffrato oro lucido



**Temperatura colore**  
3000K



**Material**  
metal

**Colour**  
embossed white  
embossed black  
embossed glossy chrome  
embossed glossy gold



**Colour temperature**  
3000K



**LED-LIBERTY-BCO**

8031414916054  
lumen

colour temp. 3000K  
colour white

**LED-LIBERTY-NER**

8031414916061  
lumen

colour temp. 3000K  
colour black

**LED-LIBERTY-CR**

8031414916078  
lumen

colour temp. 3000K  
colour chrome

**LED-LIBERTY-ORO**

8031414916085  
lumen

colour temp. 3000K  
colour gold




watt 2W

**LED-LIBERTY-STATION**

8031414916115



input 12V 6A output V 1.5A



Accessorio non incluso /  
Not included accessory



Adattatore 12V 6A /  
Adaptor 12V 6A

Accessori inclusi /  
Included accessories



Cavo per ricarica  
magnetico /  
Magnetic  
charging cable



**DC3.7V 4000 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable



# SMALL DRINK

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



**Materiale**  
metallo

**Colore**  
goffrato bianco  
goffrato nero  
goffrato oro  
goffrato corten



**Temperatura colore**  
3000K



**Material**  
metal

**Colour**  
embossed white  
embossed black  
embossed gold  
embossed corten



**Colour temperature**  
3000K




	colour temp.	colour
<b>LED-DRINK-S-BCO</b> 8031414922963 lumen		
<b>LED-DRINK-S-NER</b> 8031414922987 lumen		
<b>LED-DRINK-S-ORO</b> 8031414922994 lumen		
<b>LED-DRINK-S-BRO</b> 8031414922970 lumen watt		
	165 lm - 9h	1,5W




**LED-DRINK-PS-S**  
8031414923014



input 220/240V 50/60hz output 5V 3A



**Accessori inclusi /  
Included accessories**



Base per ricarica con USB /  
Charging base with USB



**DC3.7V 2x2200 mAh**  
Batteria ricaricabile non sostituibile /  
Rechargeable battery non replaceable



**Accessori inclusi /  
Included accessories**

Cavo per ricarica 2,5m /  
Charging cable 2,5m



# DRINK

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



collection **DRINK**

**Materiale**  
metallo

**Colore**  
goffrato bianco  
goffrato nero  
goffrato oro  
goffrato corten



**Temperatura colore**  
3000K



**Material**  
metal


**Colour**  
embossed white  
embossed black  
embossed gold  
embossed corten



**Colour temperature**  
3000K



	colour temp.	colour
<b>LED-DRINK-BCO</b> 8031414885299 lumen	190 lm - 9h	
<b>LED-DRINK-NER</b> 8031414885312 lumen	190 lm - 9h	
<b>LED-DRINK-ORO</b> 8031414885329 lumen	190 lm - 9h	
<b>LED-DRINK-BRO</b> 8031414885305 lumen watt	190 lm - 9h	




**Accessori inclusi /  
Included accessories**



Base per ricarica con USB /  
Charging base with USB



**5-7 hours** **DC3.7V 2x2200 mAh**  
Batteria ricaricabile non sostituibile /  
Rechargeable battery non replaceable



input 220/240V 50hz output 5V 3A max 15W



In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

# JAMMIN

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



**Materiale**  
metallo e PE

**Colore**  
goffrato bianco  
goffrato nero



**Temperatura colore**  
3000K



**Material**  
metal and PE

**Colour**  
embossed white  
embossed black



**Colour temperature**  
3000K





**LED-JAMMIN-L-BCO**  
8031414884377  
lumen

colour temp.	colour
60 lm - 9h	


**LED-JAMMIN-L-NER**  
8031414884384  
lumen

60 lm - 9h	

watt 2,2W



**Accessori inclusi /**  
**Included accessories**



**USB A 5V 2A**  
**USB C 5V 2A**  
Cavo per ricarica /  
Charging cable



**5-7**  
hours **DC3.7V 4000 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable

collection **JAMMIN**



# BRIO

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



collection BRIO

**Materiale**

PC

**Colore**

bianco  
nero



**Temperatura colore**

3000K



**Material**

PC


**Colour**

white  
black




**Colour temperature**

3000K



	colour temp.	colour
<b>LED-BRIO-BCO</b> 8031414889594 lumen		
<b>LED-BRIO-NER</b> 8031414889587 lumen		
watt	2,5W	



**Accessori inclusi /  
Included accessories**



**USB**  
Cavo per ricarica /  
Charging cable



**DC5V 2200 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable

# MYKES

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



**Materiale**  
metallo e PE

**Colore**  
goffrato bianco  
goffrato nero



**Temperatura colore selezionabile**  
3000K / 4000K / 5000K



**Material**  
metal and PE

**Colour**  
embossed white  
embossed black



**Selectable color temperature**  
3000K / 4000K / 5000K




**LEDT-MYKES-WHITE**  
8031414884445  
lumen

colour temp. | colour  
300 lm

**LEDT-MYKES-BLACK**  
8031414884438  
lumen

300 lm

watt 4,5W



**Accessori inclusi / Included accessories**



Cavo per ricarica con adattatore DC5V 2A / Charging and speaker cable with adaptor DC5V 2A

collection **MYKES**



In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

# COCKTAIL

Lampada da tavolo ricaricabile.  
Rechargeable table lamp.



collection **COCKTAIL**

**Materiale**  
metallo

**Colore**  
goffrato bianco  
goffrato nero  
goffrato oro  
goffrato corten



**Temperatura colore**  
3000K




**Material**  
metal

**Colour**  
embossed white  
embossed black  
embossed gold  
embossed corten



**Colour temperature**  
3000K

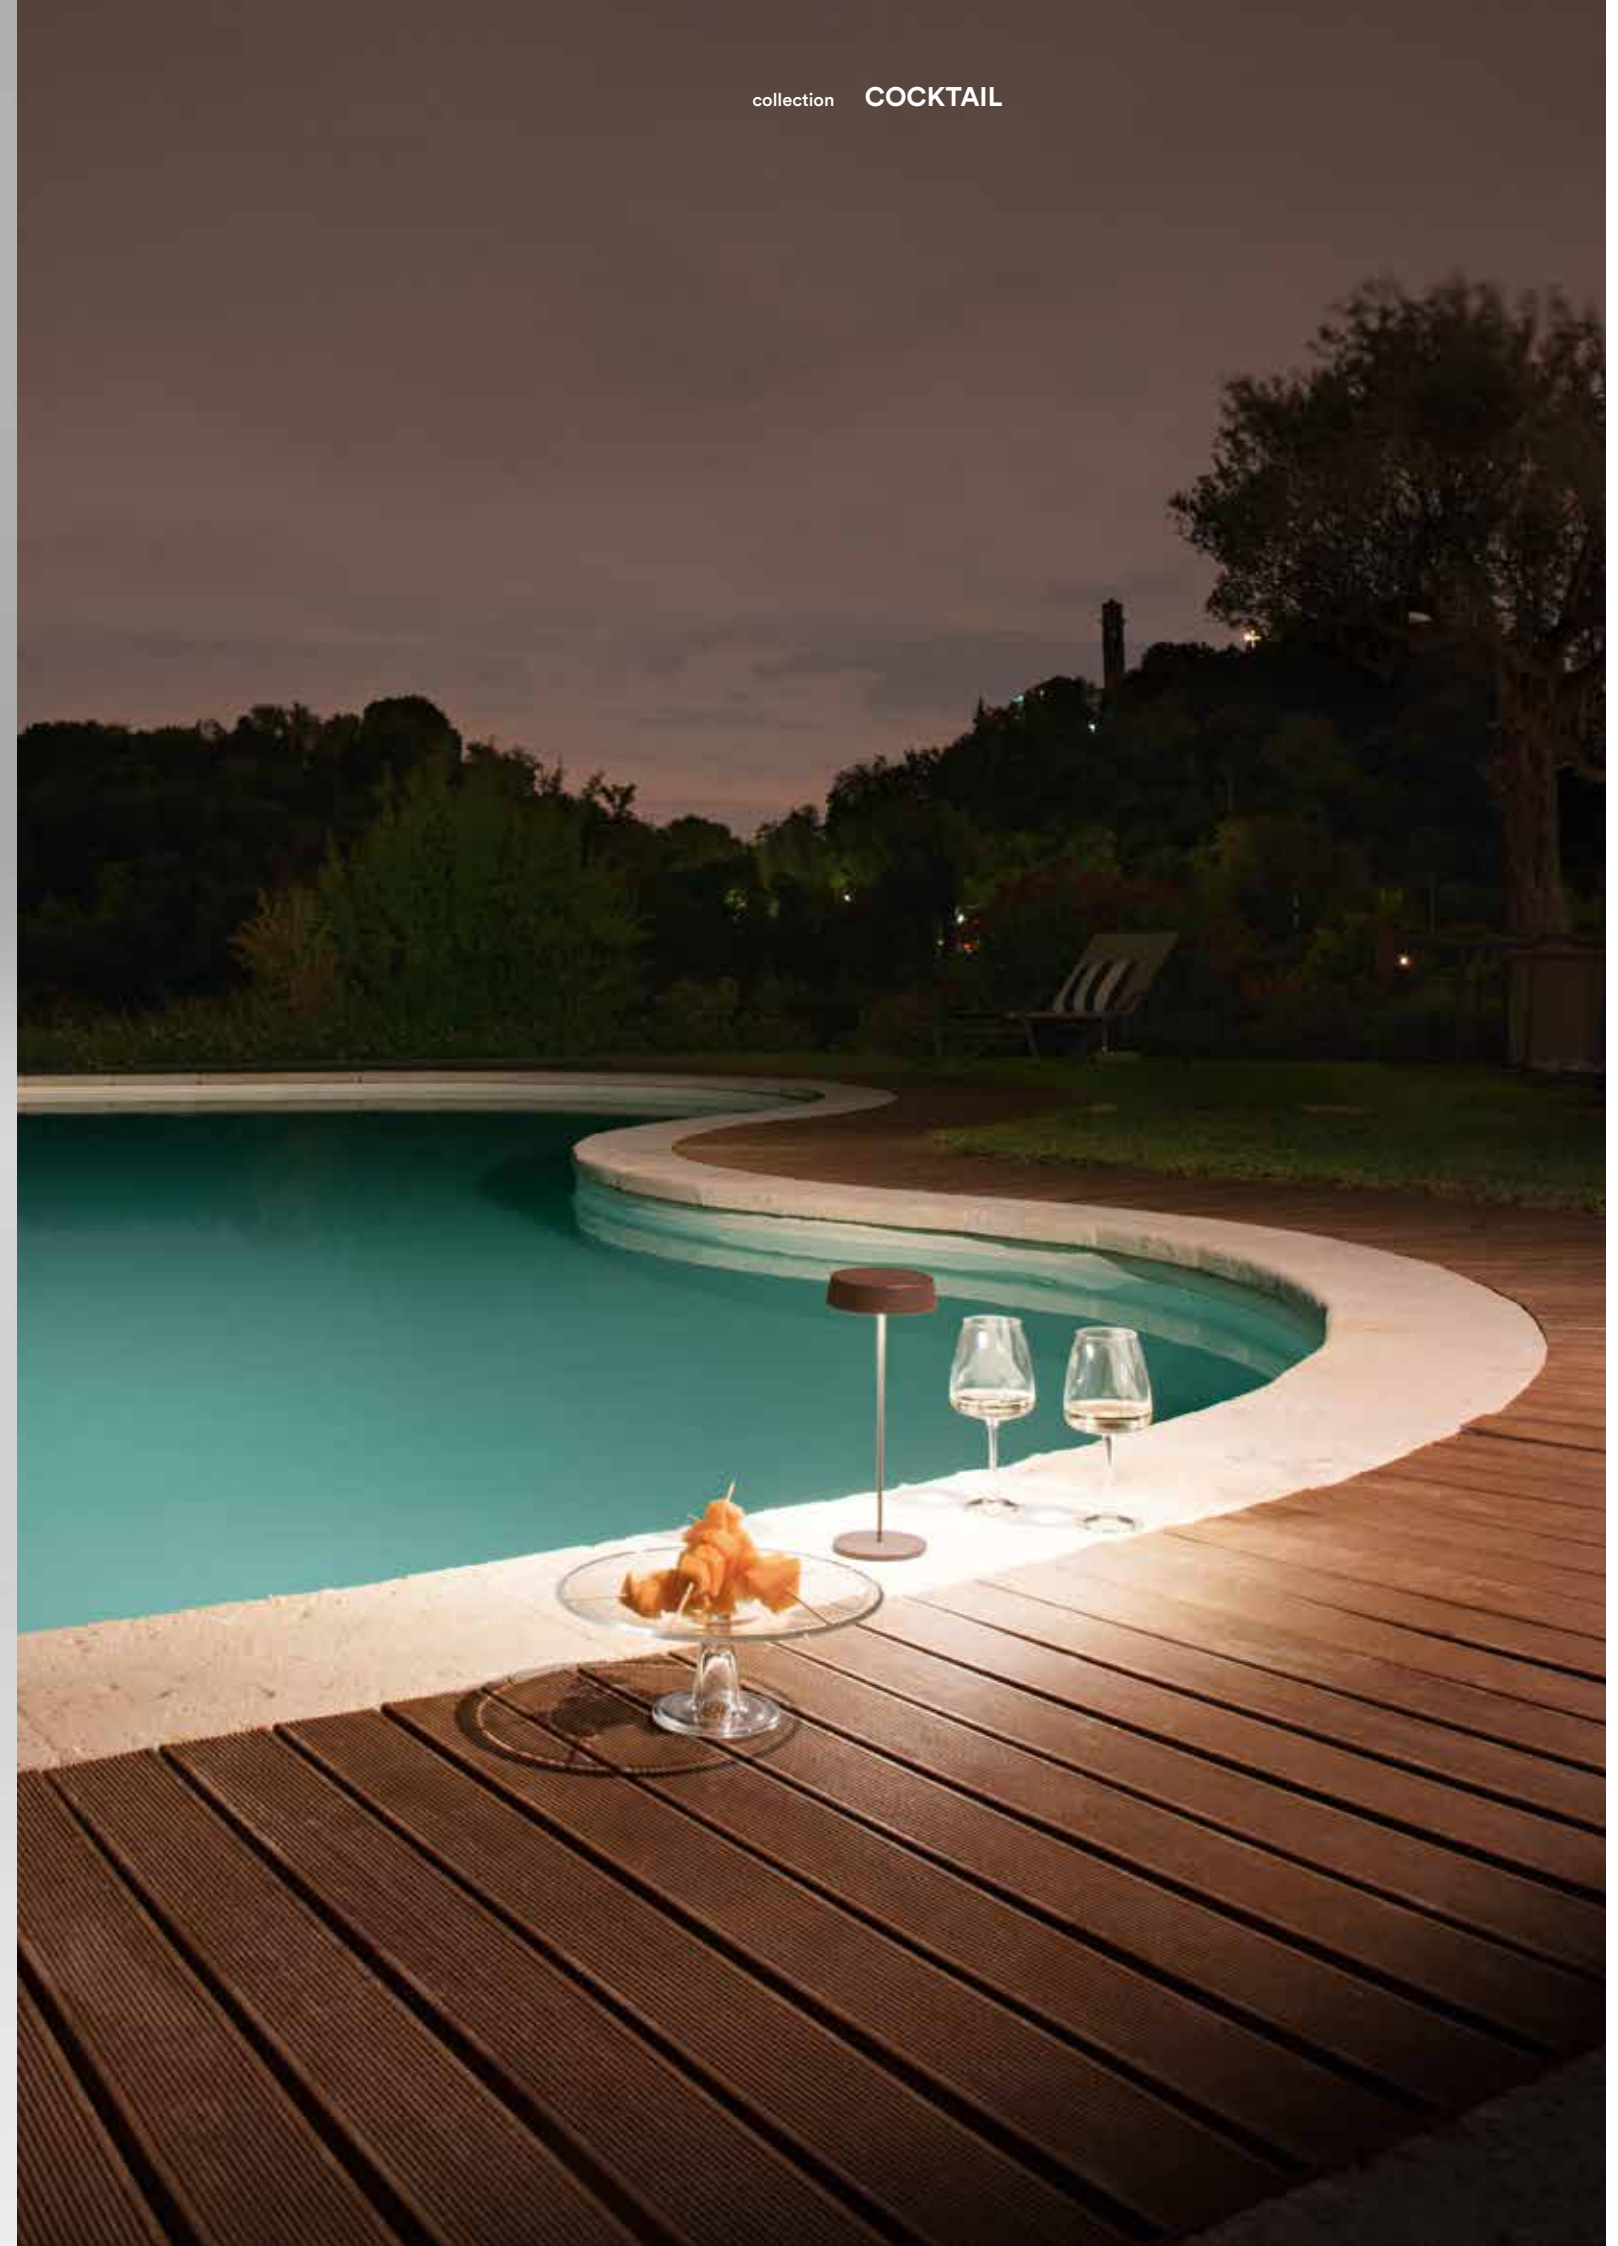

**LED-COCKTAIL-BCO**

8031414882496

lumen

colour temp.	colour
192 lm - 9h	

**LED-COCKTAIL-NER**

8031414882502

lumen

192 lm - 9h	

**LED-COCKTAIL-ORO**

8031414885282

lumen

192 lm - 9h	

**LED-COCKTAIL-BRO**

8031414882519

lumen

192 lm - 9h	

watt

2,2W



**Accessori inclusi /**  
**Included accessories**



Cavo per ricarica /  
Charging cable



**5-7**  
hours **DC3.7V 2x2200 mAh**  
Batteria ricaricabile non sostituibile /  
Rechargeable battery non replaceable

# CLIMAX

Lanterna ricaricabile.  
Rechargeable lamp.



collection **CLIMAX**

**Materiale**  
metallo - acrilico

**Colore**  
nero opaco



**Temperatura colore**  
3000K



**Material**  
metal - acrylic

**Colour**  
matt black




**Colour temperature**  
3000K



**LED-CLIMAX-L1**  
8031414883141  
lumen

colour temp.   
140 lm - 8h


watt 2W



**LED-CLIMAX-LG1**  
8031414883158  
lumen

colour temp.   
140 lm - 8h

watt 2W



Accessori inclusi / Included accessories



**USB**  
Cavo per ricarica /  
Charging cable



**5-7 hours**  
**DC3.7V 2600 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable





# OBERON

Lanterna ricaricabile.  
Rechargeable lamp.



**Materiale**  
metallo



**Colore**  
bianco

**Temperatura colore**  
3000K

**Material**  
metal

**Colour**  
white


**Colour temperature**  
3000K

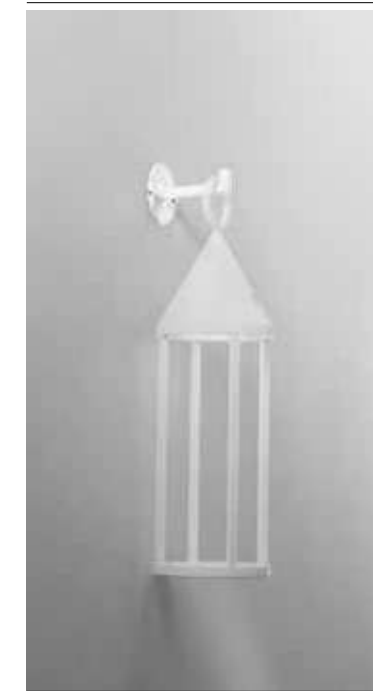

**LANT-OBERON**  
8031414882526  
lumen


colour temp. | colour  
168 lm - 9h

watt | 2,2W



**LANT-OBERON-KIT-AP**  
8031414882533

Kit staffa applique per lume /  
Wall lamp bracket kit



**LANT-OBERON-KIT-S**  
8031414882540

Kit sospensione per lume cavo 2 m /  
Suspension kit 2 m cable




**Accessori inclusi / Included accessories**

Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m

**6 hours** DC3.7V 2x2200 mAh Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

## OUTDOOR




INCASSI E SEGNAPASSI  
INGROUND AND WALK LIGHTS



# BARRET

Segnapassi incasso.  
Recessed light.

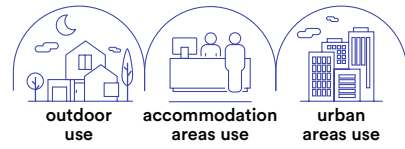


- Materiale**  
alluminio
- Colore**  
nikel
- Temperatura colore**  
3000K / 4000K
- Driver**  
350mA 3,5V  
corrente costante  
non incluso
- Material**  
aluminum
- Colour**  
nikel
- Colour temperature**  
3000K / 4000K
- Driver**  
350mA 3,5V  
constant current  
not included




	colour temp.	colour	recessed box
<b>LED-BARRET-R24C</b> 8031440355070	3000K	nikel	Ø 20 mm 80 mm
<b>LED-BARRET-R24</b> 8031440364416	4000K	nikel	Ø 24 mm 35 mm
<b>lumen</b>	85 lm		
<b>lumen</b>	85 lm		
<b>watt</b>		1W	
<b>driver</b>		3,5V DC	
<b>beam angle</b>		40°	
<b>pressure loads</b>		max 250 kg	
		Ø 16 mm	

Fotometria del prodotto /  
Photometric curve




LED-BARRET-R24

Connessione in serie /  
Serie connection system



Driver p. 843-852

Accessori inclusi /  
Included accessories



x1  
Cavo 1 m /  
1 m cable



# SUBWAY

Segnapassi incasso.  
Recessed light.




- Materiale**  
alluminio
- Colore**  
nikel
- Temperatura colore**  
3000K / 4000K / BLU
- Driver**  
DC 12-24V  
tensione costante  
non incluso
- Material**  
aluminum
- Colour**  
nikel
- Colour temperature**  
3000K / 4000K
- Driver**  
DC 12-24V  
constant voltage  
not included




	colour temp.	colour	recessed box
<b>LED-SUBWAY-R1C</b> 8031414879342	3000K	nikel	Ø 32 mm 75 mm
<b>LED-SUBWAY-R1M</b> 8031414877263	4000K	nikel	Ø 32 mm 75 mm
<b>LED-SUBWAY-R1B</b> 8031414877270	4000K / BLU	nikel	Ø 22 mm
<b>lumen</b>	385 lm		
<b>lumen</b>	420 lm		
<b>lumen</b>	53 lm		
<b>watt</b>		3W	
<b>driver</b>		12/24V	
<b>beam angle</b>		15°	
<b>pressure loads</b>		max 1000 kg	
		Ø 24 mm	

Fotometria del prodotto /  
Photometric curve




LED-SUBWAY-R1

Connessione in parallelo /  
Serie connection system



Driver p. 843-852  
Controller p. 854-857

Accessori inclusi /  
Included accessories



x1  
Cavo 1 m /  
1 m cable



OUTDOOR INCASSIE SEGNAPASSI / INGROUND AND WALK LIGHTS

In.tec light

# RIDER

Kit 6 pz segnapassi incasso.  
Kit 6pcs recessed light.



technical information **RIDER**



**Materiale**

acciaio

**Colore**

acciaio



**Temperatura colore**

RGB



**Driver**

12V 6W  
incluso

**Material**

steel

**Colour**

stainless steel



**Colour temperature**

RGB



**Driver**

12V 6W  
included



**LED-RIDER-R6**

8031436141236

lumen

colour temp.




colour



360 lm

watt	6 x 0,6W
driver	12V 6W DC
beam angle	120°
pressure loads	max 100 kg
	Ø 23 mm

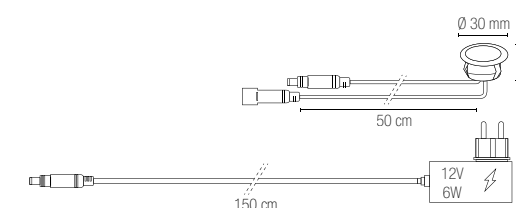

**LED-RIDER-R6-RGB**

8031439871260

lumen

colour temp.




colour




RGB

watt	6 x 0,6W
driver	12V 6W DC
beam angle	120°
pressure loads	max 100 kg
	Ø 23 mm

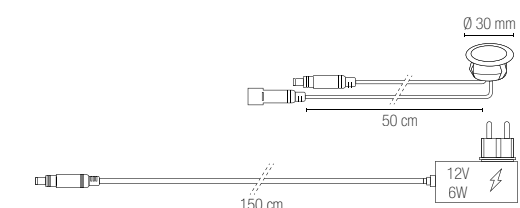

**Fotometria del prodotto /  
Photometric curve**



LED-RIDER-R6

**Accessori inclusi /  
Included accessories**



x6



x6

Cavo 1,5 m /  
1,5 m cable



IP44

**Accessori inclusi /  
Included accessories**



x6



x1

Cavo 1,5 m /  
1,5 m cable



IP44



IR

Control system

# RIDER

Kit 6 pz segnapassi incasso.  
Kit 6pcs recessed light.

**Materiale**  
lega di zinco

**Colore**  
silver



**Temperatura colore**  
4000K



**Driver**  
12V 6W DC  
incluso

**Material**  
zinc alloy

**Colour**  
silver



**Colour temperature**  
4000K



**Driver**  
12V 6W DC  
included




**LED-RIDER-R6-DIR**  
8031439921279  
lumen 100 lm

watt	6 x 0,6W
driver	12V 6W DC
beam angle	105°
pressure loads	max 100 kg
	Ø 23 mm




**Fotometria del prodotto / Photometric curve**



LED-RIDER-R6-DIR

**Accessori inclusi / Included accessories**




Cavo 1,5 m / 1,5 m cable



# IMPACT

Segnapassi incasso in alluminio.  
Aluminum recessed steplight.

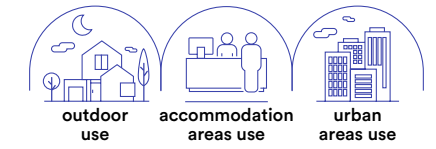

**Materiale**  
alluminio

**Colore**  
nikel



**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 24V  
tensione costante  
non incluso

**Material**  
aluminum

**Colour**  
nikel



**Colour temperature**  
3000K / 4000K



**Driver**  
DC 24V  
constant voltage  
not included



Connessione in parallelo /  
Serie connection system  
Driver p. 843-852  
Controller p. 854-857




**EASY DOMOTICA**




**LED-IMPACT24V-R1C**  
8031414879298  
lumen 170 lm

**LED-IMPACT24V-R1M**  
8031414879304  
lumen 170 lm

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm



**Fotometria del prodotto / Photometric curve**





LED-IMPACT24V-R1C  
LED-IMPACT24V-Q1C



**LED-IMPACT24V-Q1C**  
8031414879311  
lumen 170 lm


**LED-IMPACT24V-Q1M**  
8031414879328  
lumen 170 lm

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm



LED-IMPACT24V-R1M  
LED-IMPACT24V-Q1M

**Accessori inclusi / Included accessories**



Cavo 1 m / 1 m cable

# STEP

**Segnapassi incasso in alluminio.**  
Aluminum recessed steplight.



**Materiale**  
alluminio

**Colore**  
silver

**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 24V  
tensione costante  
non incluso


**Material**  
aluminum

**Colour**  
silver

**Colour temperature**  
3000K / 4000K



**Driver**  
DC 24V  
constant voltage  
not included



technical information **STEP**

EASY  
DOMOTICA



**LED-STEP24V-R1C**

8031414879250

lumen

colour temp.	colour
170 lm	


**LED-STEP24V-R1M**

8031414879267

lumen

170 lm	
--------	--

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm



**LED-STEP24V-R4C**

8031414879274

lumen

colour temp.	colour
170 lm	


**LED-STEP24V-R4M**

8031414879281

lumen


170 lm	
--------	--

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm



Connessione in parallelo /  
Serie connection system  
Driver p. 843-852  
Controller p. 854-857

Fotometria del prodotto / Photometric curve

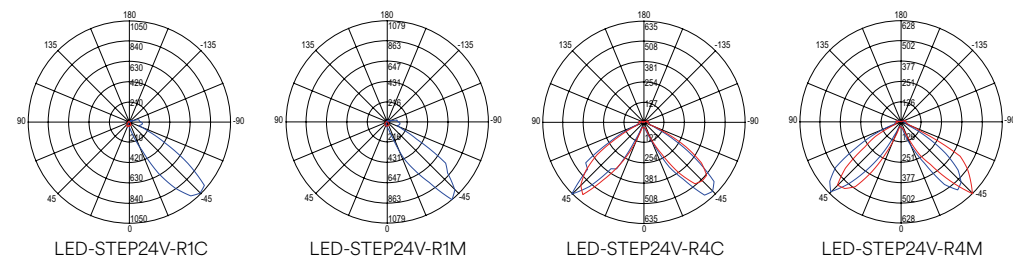


Accessori inclusi /  
Included accessories



**x1**  
Cavo 1 m /  
1 m cable

# WALK

Faro calpestabile ad incasso in acciaio inox.  
Walkable recessed light in stainless steel.

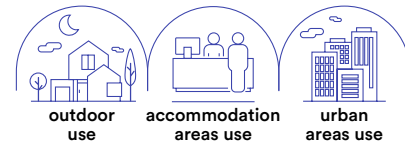

collection **WALK**

- Materiale**  
acciaio inox

---

- Temperatura colore**  
4000K
- 
- Driver**  
integrato

---


- Material**  
stainless steel

---


- Colour temperature**  
4000K
- 
- Driver**  
built-in





LED-WALK-RT 8031414882816	colour temp.	●	●	recessed box
	lumen	1500 lm		
watt	12W			
beam angle	30°			
pressure loads	max 2000 kg			

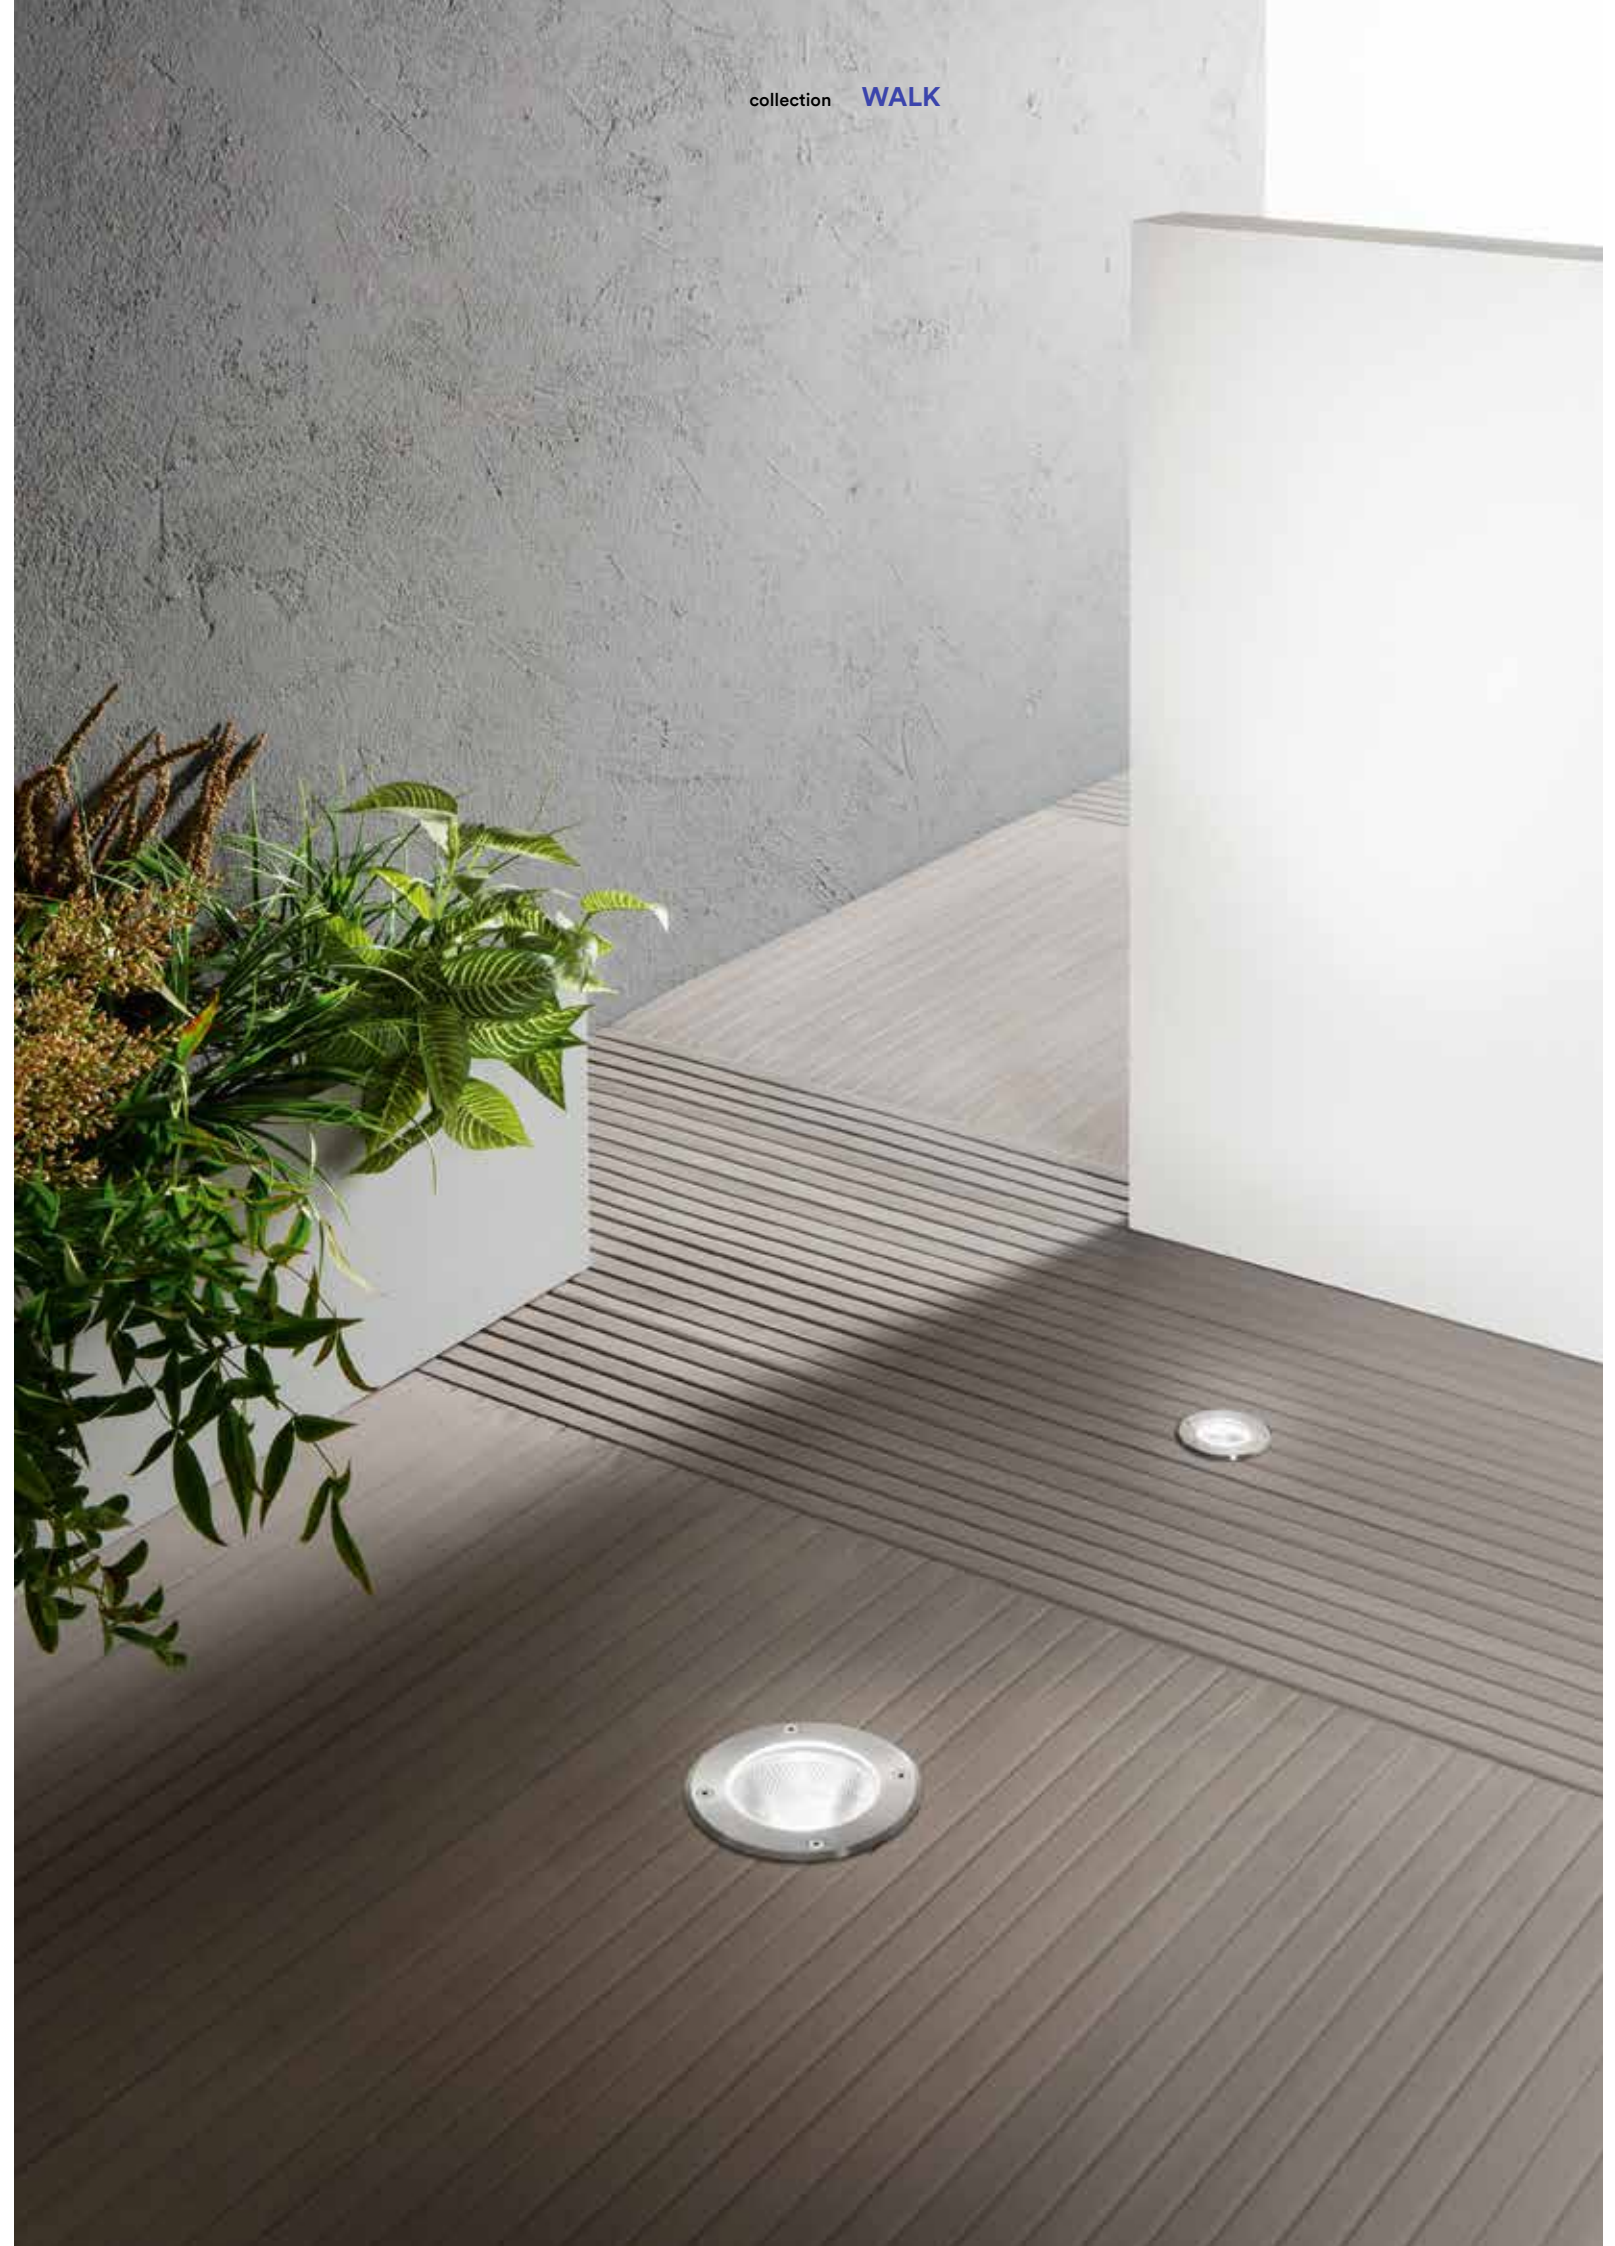



In.tec light **OUTDOOR** INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS




	colour temp.	colour	recessed box
<b>LED-WALK-Q7C</b> 8031414885824			
lumen	345 lm		
<b>LED-WALK-Q7</b> 8031440355599			
lumen	375 lm		
watt	3W		
beam angle	30°		
pressure loads	max 2000 kg		

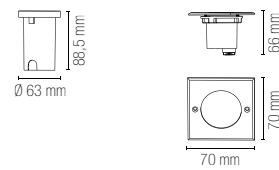

	colour temp.	colour	recessed box
<b>LED-WALK-R7C</b> 8031414885855			
lumen	345 lm		
<b>LED-WALK-R7</b> 8031440355582			
lumen	375 lm		
watt	3W		
beam angle	30°		
pressure loads	max 2000 kg		



	colour temp.	colour	recessed box
<b>LED-WALK-Q11C</b> 8031414885800			
lumen	930 lm		
<b>LED-WALK-Q11</b> 8031440355575			
lumen	990 lm		
watt	8W		
beam angle	30°		
pressure loads	max 2000 kg		

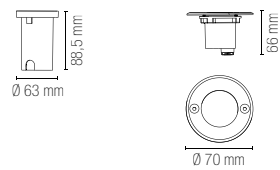
	colour temp.	colour	recessed box
<b>LED-WALK-R11C</b> 8031414885831			
lumen	930 lm		
<b>LED-WALK-R11</b> 8031440355568			
lumen	990 lm		
watt	8W		
beam angle	30°		
pressure loads	max 2000 kg		


	colour temp.	colour	recessed box
<b>LED-WALK-Q14C</b> 8031414885817			
lumen	1400 lm		
<b>LED-WALK-Q14</b> 8031440355551			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		


	colour temp.	colour	recessed box
<b>LED-WALK-R14C</b> 8031414885848			
lumen	1400 lm		
<b>LED-WALK-R14</b> 8031440355544			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		

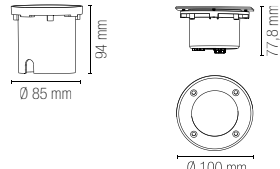

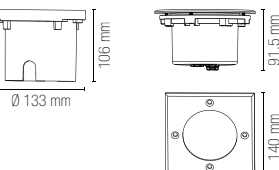Fotometria del prodotto / Photometric curve

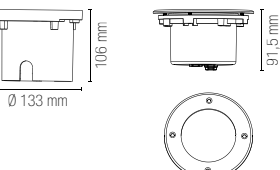

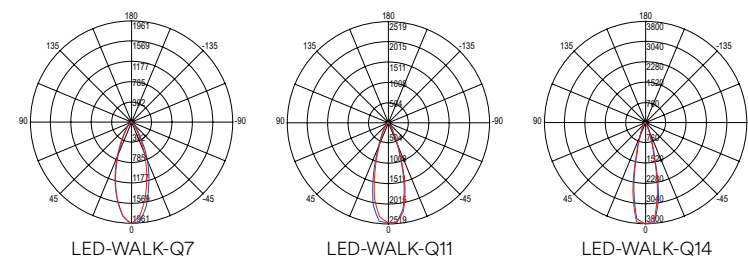Fotometria del prodotto / Photometric curve

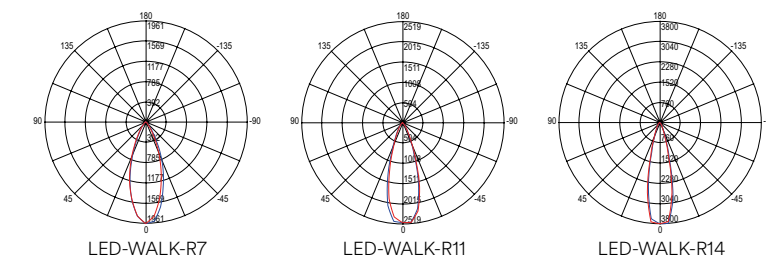

# HUMMER

Faro carrabile ad incasso in acciaio inox.  
Driveover recessed light in stainless steel.




technical information **HUMMER**



colour	recessed box
<b>I-HUMMER-R1</b> 8031414893188 <b>I-HUMMER-R1-ANT</b> 8031414895830 <b>I-HUMMER-R1-BRO</b> 8031414893195	

1 x GU10 MAX 35W  
pressure loads max 500 kg




Lampadina non inclusa / Light bulb not included



colour	recessed box
<b>I-HUMMER-R2</b> 8031414893201 <b>I-HUMMER-R2-ANT</b> 8031414895847 <b>I-HUMMER-R2-BRO</b> 8031414893218	

1 x GU10 MAX 35W  
pressure loads max 500 kg




Lampadina non inclusa / Light bulb not included



colour	recessed box
<b>I-HUMMER-R4</b> 8031414877249 <b>I-HUMMER-R4-ANT</b> 8031414895854 <b>I-HUMMER-R4-BRO</b> 8031414893225	

1 x GU10 MAX 35W  
pressure loads max 500 kg




Lampadina non inclusa / Light bulb not included



colour	recessed box
<b>I-HUMMER-UP</b> 8031414893232 <b>I-HUMMER-UP-ANT</b> 8031414895861 <b>I-HUMMER-UP-BRO</b> 8031414893249	

1 x GU10 MAX 35W  
pressure loads max 500 kg



Lampadina non inclusa / Light bulb not included

OUTDOOR INCASSIE SEGNAPASSI / INGROUND AND WALK LIGHTS


In.tec light

# DRIVE

Faro calpestabile ad incasso in acciaio inox.  
Walkable recessed light in stainless steel.




technical information **DRIVE**

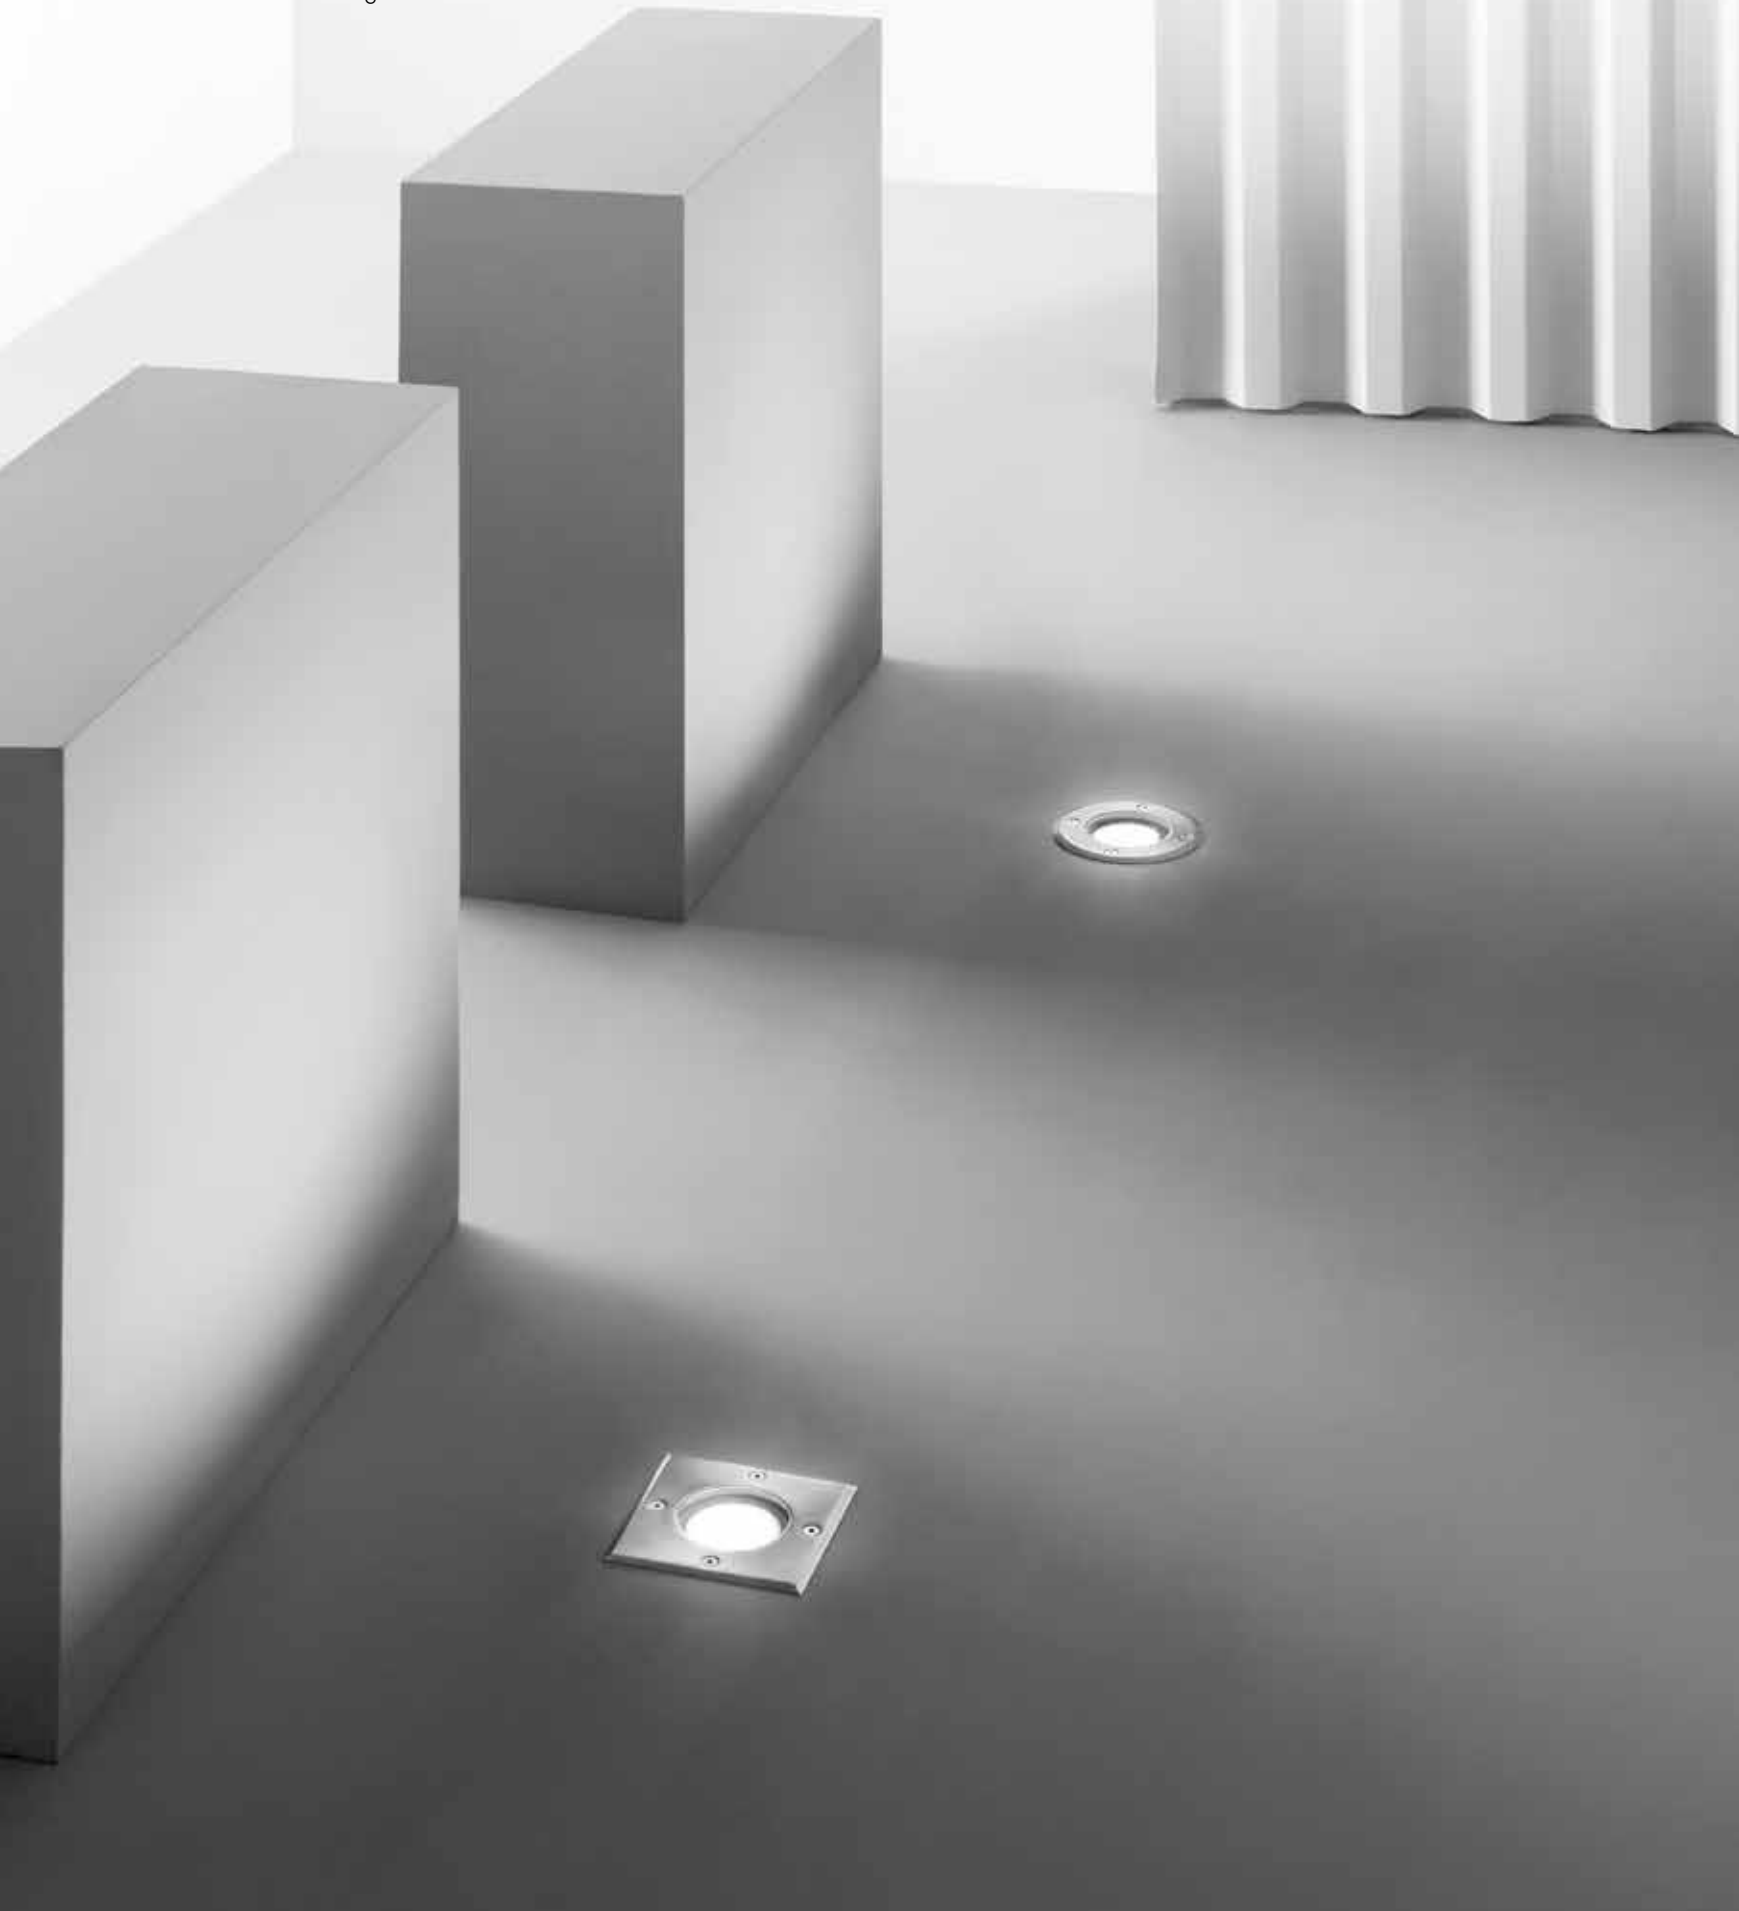

**I-DRIVE-R1**  
8031440313261

1 x GU10 MAX 42W  
pressure loads max 500 kg

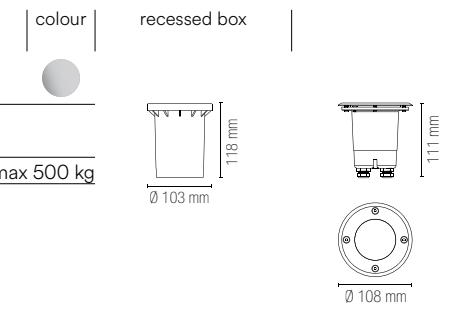


Lampadina non inclusa / Light bulb not included



**I-DRIVE-Q1**  
8031440313254

1 x GU10 MAX 42W  
pressure loads max 500 kg

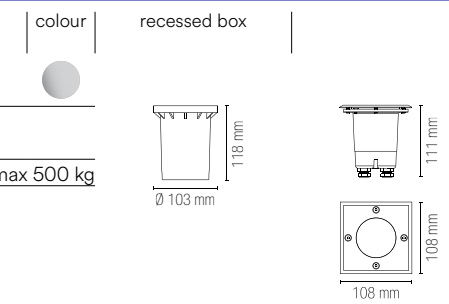


Lampadina non inclusa / Light bulb not included



**I-DRIVE-M-R1**  
8031440313247

1 x GU10 MAX 42W  
pressure loads max 500 kg

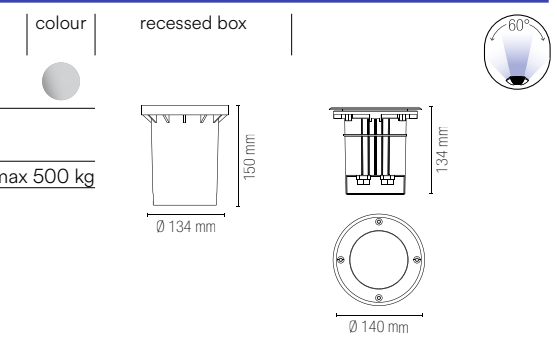


Lampadina non inclusa / Light bulb not included



**I-DRIVE-E27**  
8031440313230

1 x E27 MAX 60W  
pressure loads max 500 kg

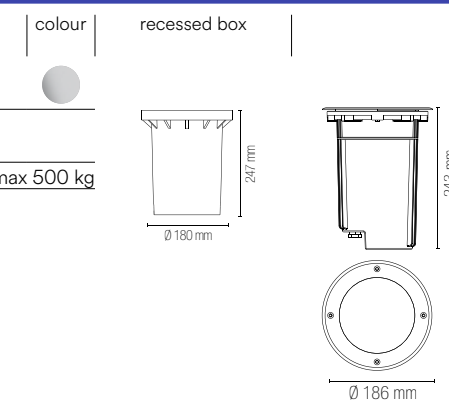

Lampadina non inclusa / Light bulb not included

In.tec light **OUTDOOR** INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS



# ELMO

Segnapassi in alluminio pressofuso.  
Die-cast aluminum steplight.

**Materiale**  
alluminio

**Colore**  
silver

**Temperatura colore**  
3000K / 4000K



**Driver**  
DC 24V  
tensione costante  
non incluso

**Material**  
aluminum

**Colour**  
silver

**Colour temperature**  
3000K / 4000K



**Driver**  
DC 24V  
constant voltage  
not included



technical information **ELMO**



		<b>LED-ELMO-R1C</b> 8031414882823	colour temp.	colour	
		lumen	59 lm		
		<b>LED-ELMO-R1M</b> 8031414882830	colour temp.	colour	
		lumen	65 lm		
		watt	0,5W		
		beam angle	90°		
		pressure loads	max 1000 kg		

		<b>LED-ELMO-R2C</b> 8031414882847	colour temp.	colour	
		lumen	116 lm		
		<b>LED-ELMO-R2M</b> 8031414882854	colour temp.	colour	
		lumen	121 lm		
		watt	1W		
		beam angle	90° x 2		
		pressure loads	max 1000 kg		


		<b>LED-ELMO-R4C</b> 8031414882861	colour temp.	colour	
		lumen	226 lm		
		<b>LED-ELMO-R4M</b> 8031414882878	colour temp.	colour	
		lumen	236 lm		
		watt	2W		
		beam angle	90° x 4		
		pressure loads	max 1000 kg		

		<b>LED-ELMO-UPC</b> 8031414897247	colour temp.	colour	
		lumen	360 lm		
		<b>LED-ELMO-UPM</b> 8031414897254	colour temp.	colour	
		lumen	380 lm		
		watt	3W		
		beam angle	180°		
		pressure loads	max 200 kg		



**I-ELMO-SPK**  
8031414888092

Accessori inclusi /  
Included accessories



x1  
Cavo 30 cm /  
30 cm cable

In.tec light **OUTDOOR** INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

# GROUND

Segnapassi in alluminio pressofuso colore antracite.  
Die-cast aluminum steplight in anthracite colour.



technical information **GROUND**



**Materiale**  
alluminio

**Colore**  
antracite

**Temperatura colore selezionabile**  
3000K / 4000K

**Driver**  
DC 24V  
tensione costante non incluso

**Material**  
aluminum

**Colour**  
anthracite

**Selectable color temperature**  
3000K / 4000K


**Driver**  
DC 24V  
constant voltage not included



**LED-GROUND-R1**  
8031414897261  
lumen 730 lm

colour temp. ● ● ●  
colour ●


watt 6W  
beam angle 120°  
pressure loads max 2000 kg



**LED-GROUND-R2**  
8031414897278  
lumen 1460 lm

colour temp. ● ● ●  
colour ●


watt 12W  
beam angle 120°  
pressure loads max 2000 kg



**LED-GROUND-R4**  
8031414897285  
lumen 1960 lm

colour temp. ● ● ●  
colour ●


watt 16W  
beam angle 120°  
pressure loads max 2000 kg



**LED-GROUND-UP**  
8031414897292  
lumen 1480 lm

colour temp. ● ● ●  
colour ●

watt 12W  
beam angle 120°  
pressure loads max 1000 kg



**LED-GROUND-SPK**  
8031414897308

In.tec light **OUTDOOR** INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

# ONYX

Segnapassi in alluminio pressofuso finitura nero o bianco goffrato.  
Die-cast aluminum steplight in embossed black or white finish.



**Materiale**  
alluminio

**Colore**  
bianco  
nero



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
aluminum


**Colour**  
white  
black



**Colour temperature**  
4000K



**Driver**  
built-in



technical information **ONYX**



**INC-ONYX-Q1 BCO**

8031414864089

lumen

colour temp.



colour



420 lm

**INC-ONYX-Q1 NERO**

8031440361262

lumen

colour temp.



colour



420 lm

watt

2W



beam angle

45°



Ø 68 mm

recessed box



**INC-ONYX-R1 BCO**

8031440361248

lumen

colour temp.



colour



420 lm

**INC-ONYX-R1 NERO**

8031440361255

lumen

colour temp.



colour



420 lm

watt

2W



beam angle

45°



Ø 68 mm

recessed box



# STRATOS

Incasso segnapassi alloggio in cassetta di derivazione 503 o 504 o 506, con mascherine in alluminio nei colori bianco, antracite, silver o corten.

Downlight for recess box 503, 504 or 506, with aluminum masks in white, anthracite, silver or corten.



technical information **STRATOS**



<b>Materiale</b> alluminio	<b>Material</b> aluminum
<b>Colore</b> bianco silver nero corten	<b>Colour</b> white silver black corten
<b>Temperatura colore selezionabile</b> 3000K / 4000K / 6000K	<b>Selectable color temperature</b> 3000K / 4000K / 6000K
<b>Driver</b> integrato	<b>Driver</b> built-in




<b>INC-STRATOS-503</b> 8031414888184 lumen  360 lm <table border="0"> <tr><td>watt</td><td>3W</td></tr> <tr><td>beam angle</td><td>120°</td></tr> </table>	watt	3W	beam angle	120°	<b>INC-STRATOS-504</b> 8031414888221 lumen  360 lm <table border="0"> <tr><td>watt</td><td>3W</td></tr> <tr><td>beam angle</td><td>120°</td></tr> </table>	watt	3W	beam angle	120°	<b>INC-STRATOS-506</b> 8031414888276 lumen  600 lm <table border="0"> <tr><td>watt</td><td>5W</td></tr> <tr><td>beam angle</td><td>120°</td></tr> </table>	watt	5W	beam angle	120°
watt	3W													
beam angle	120°													
watt	3W													
beam angle	120°													
watt	5W													
beam angle	120°													

<b>INC-STRATOS-503W</b> 8031414886890  <b>INC-STRATOS-503S</b> 8031414888214  <b>INC-STRATOS-503B</b> 8031414888191  <b>INC-STRATOS-503C</b> 8031414888207 	<b>INC-STRATOS-504W</b> 8031414888269  <b>INC-STRATOS-504S</b> 8031414888252  <b>INC-STRATOS-504B</b> 8031414888238  <b>INC-STRATOS-504C</b> 8031414888245 	<b>INC-STRATOS-506W</b> 8031414888313  <b>INC-STRATOS-506S</b> 8031414888306  <b>INC-STRATOS-506B</b> 8031414888283  <b>INC-STRATOS-506C</b> 8031414888290 
--	--	--



scatola derivazione 503 503 junction box non inclusa / not included      scatola derivazione 503 504 junction box non inclusa / not included      scatola derivazione 504 504 junction box non inclusa / not included      scatola derivazione 506L 506L junction box non inclusa / not included

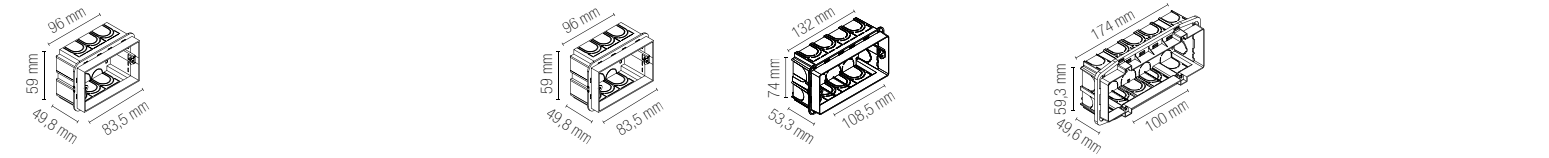

OUTDOOR INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

In.tec light

# SLAB

**Incasso segnapassi alloggio in cassetta di derivazione 503 o 502 o 506, con diffusore in vetro temperato bianco.**

Down light for recess box 503 or 502 or 506 with white tempered glass diffuser.



## Materiale

struttura in alluminio e diffusore in vetro temperato

## Temperatura colore selezionabile

3000K / 4000K / 5500K



## Driver

integrato

## Material

structure in aluminum and tempered glass diffuser

## Selectable color temperature

3000K / 4000K / 5500K



## Driver

built-in




technical information **SLAB**




**INC-SLAB-502**  
8031414888177

lumen



360 lm

watt	3W
beam angle	120°
	Ø 60 mm



molle incluse / spring included




**INC-SLAB-503**  
8031414864683

lumen




440 lm

watt	3W
beam angle	120°
	92 × 55 × 31 mm




**INC-SLAB-506**  
8031414877232

lumen




730 lm

watt	5W
beam angle	120°
	163 × 60 × 50 mm




### Doppio sistema di fissaggio / Double fixing system

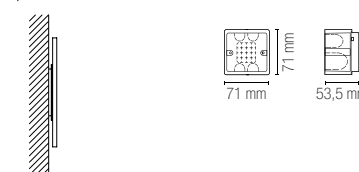


fissaggio incasso a muro o soffitto / Recessed wall or ceiling mounting

scatola derivazione 502E  
502E junction box  
**non inclusa / not included**

scatola derivazione 503  
503 junction box  
**non inclusa / not included**



scatola derivazione 506L  
506L junction box  
**non inclusa / not included**




# BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506, nei colori bianco, antracite goffrato o corten.  
Downlight for recess box 503 or 506 in white, embossed anthracite or corten.



- Materiale**  
polycarbonato
- Colore**  
bianco goffrato  
antracite goffrato  
corten
- Temperatura colore**  
4000K
- Temperatura colore selezionabile**  
3000K / 3500K / 4000K
- Driver**  
integrato
- Material**  
polycarbonate
- Colour**  
embossed white  
embossed antracite  
corten
- Colour temperature**  
4000K
- Selectable color temperature**  
3000K / 3500K / 4000K
- Driver**  
built-in




technical information **BREEN**




	colour temp.	colour
<b>INC-BREEN-503 BCO</b> 8031414864690 lumen	290 lm	
<b>INC-BREEN-503 ANT</b> 8031414866809 lumen	300 lm	
<b>INC-BREEN-503 BRO</b> 8031414888139 lumen	290 lm	

watt 3W




scatola derivazione 503  
503 junction box  
non inclusa / not included




	colour temp.	colour
<b>INC-BREEN-506 BCO</b> 8031414888153 lumen	380 lm	
<b>INC-BREEN-506 ANT</b> 8031414888146 lumen	380 lm	
<b>INC-BREEN-506 BRO</b> 8031414888160 lumen	380 lm	


watt 4W



scatola derivazione 506L  
506L junction box  
non inclusa / not included



Doppio sistema di fissaggio /  
Double fixing system

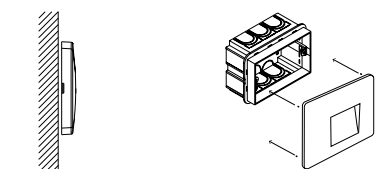

fissaggio a muro /  
wall fixing

fissaggio su cassetta 503 /  
fixing on box 503  
non inclusa / not included

OUTDOOR INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

In.tec light

# SMILE

Applique segnapassi a LED doppio fissaggio.  
Fissaggio a muro e su cassetta 502E.

Aluminum LED walk light double mounting system.  
Wall or 502E junction box mounting.



technical information **SMILE**



**Materiale**  
alluminio

**Colore**  
bianco  
nero



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
aluminum

**Colour**  
white  
black



**Colour temperature**  
4000K




**Driver**  
built-in



**LED-SMILE-BCO**  
8031414881574  
lumen

colour temp.	colour
300 lm	

watt	2,5W
beam angle	100°



Doppio sistema di fissaggio / Double fixing system




fissaggio a muro / wall fixing      fissaggio su cassetta 502E / fixing on box 502E  
**non inclusa / not included**



**LED-SMILE-ANT**  
8031414881567  
lumen

colour temp.	colour
300 lm	


watt	2,5W
beam angle	100°



Doppio sistema di fissaggio / Double fixing system



fissaggio a muro / wall fixing      fissaggio su cassetta 502E / fixing on box 502E  
**non inclusa / not included**

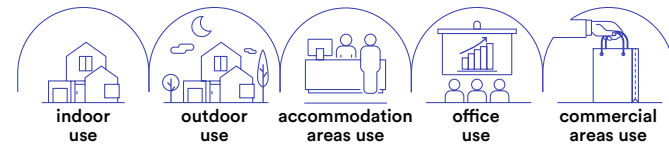

**Materiale**  
alluminio e  
placchette in acciaio

**Colore**  
nikel  
bianco



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
aluminum and  
steel frames

**Colour**  
nikel  
white



**Colour temperature**  
4000K



**Driver**  
built-in

**Incasso segnapassi alloggio in cassetta di derivazione 503  
funzione con sensore di movimento e crepuscolare con doppia  
placchetta in acciaio intercambiabile nei colori nikel o bianco.**  
Down light for recess box 503 and double sensor function  
motion and crepuscular with double interchangeable  
steel frame in nikel or white colours.



	colour temp.	colour
<b>INC-BOLT-503S</b> 8031414866281		
lumen	200 lm	
watt	3W	
beam angle	120°	


Installare più prodotti lateralmente  
ad una distanza minimo di 2 m /  
Install multiple bolt 503S within  
2 m of each other



Non installare i prodotti uno di  
fronte all'altro per possibile conflitto /  
Do not install products one of facing  
each other for possible conflict



Il prodotto non va installato  
vicino ad una fonte di luce intensa  
e costante superiore di 20 LUX /  
Do not install the bolt 503S  
near a light source with  
intensity over 20 LUX




**Accessori inclusi /  
Included accessories**




**2x**  
placchette /  
frames



**2x**  
staffette /  
brackets



scatola derivazione 503  
503 junction box  
**non inclusa / not included**



5m  
120° **60"**  
Sensore di  
movimento  
regolabile /  
Adjustable  
motion sensor

on 2 LUX  
off 1000 LUX  
Sensore  
crepuscolare /  
Crepuscular  
sensor

**Materiale**  
PC e  
placchette in acciaio

**Colore**  
nikel  
bianco



**Temperatura colore  
selezionabile**  
3000K / 4000K / 6500K



**Driver**  
integrato

**Material**  
PC and  
steel frames

**Colour**  
nikel  
white



**Selectable color  
temperature**  
3000K / 4000K / 6500K



**Driver**  
built-in

**Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con  
doppia placchetta in acciaio intercambiabile nei colori nikel o bianco.**  
Down light for recess box 503 or 506L with double  
interchangeable steel frame in nikel or white colours.



	colour temp.	colour
<b>INC-BOLT-503CCT</b> 8031414881543		
lumen	350 lm	
watt	3W	
beam angle	120°	

	colour temp.	colour
<b>INC-BOLT-506CCT</b> 8031414881550		
lumen	650 lm	
watt	5W	
beam angle	120°	


**Accessori inclusi /  
Included accessories**




**2x**  
placchette /  
frames




**2x**  
staffette /  
brackets



scatola derivazione 503  
503 junction box  
**non inclusa / not included**




scatola derivazione 506L  
506L junction box  
**non inclusa / not included**





# STEPLIGHT


Applique segnapassi a LED in termoplastica antracite.  
Thermoplastic LED walk light anthracite finish.

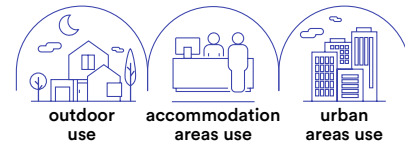

- Materiale**  
termoplastica
- Colore**  
antracite goffrato
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
thermoplastic
- Colour**  
embossed antracite
- Colour temperature**  
4000K
- Driver**  
built-in



**LED-STEPLIGHT**  
8031414882304  
lumen



watt 1W  
beam angle 120°

# SHELBY


Applique segnapassi a LED in alluminio antracite.  
Aluminum LED walk light anthracite finish.



- Materiale**  
alluminio
- Colore**  
antracite goffrato
- Temperatura colore selezionabile**  
3000K / 4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed antracite
- Selectable color temperature**  
3000K / 4000K
- Driver**  
built-in




**LED-W-SHELBY-130**  
8031440361002  
lumen

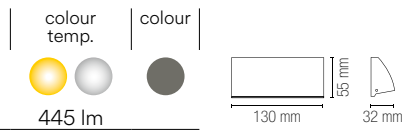

watt 4W  
beam angle 120°



**LED-W-SHELBY-170**  
8031440361019  
lumen

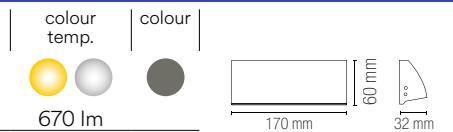


watt 6W  
beam angle 120°

OUTDOOR INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

In.tec light


# OUTDOOR

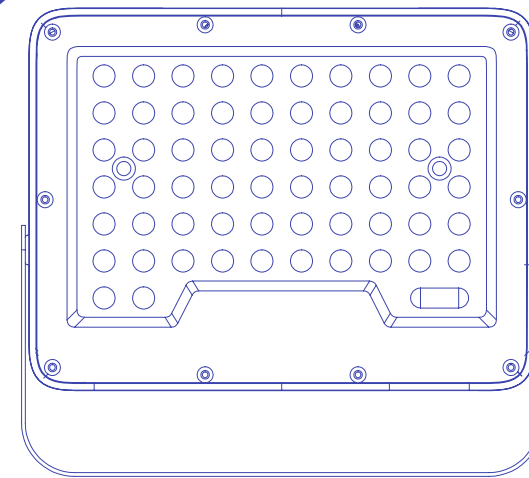

SOLARI  
SOLAR LAMPS

# KYOTO

Collezione in alluminio antracite con sensore e pannello solare.  
Anthracite aluminum collection with sensor and solar panel.

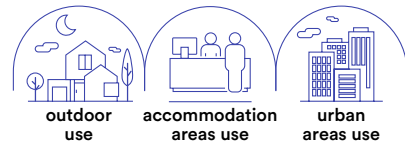

- Materiale**  
alluminio
- Colore**  
antracite goffrato
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in



**LED-KYOTO-AP**  
8031414883868  
lumen


colour temp.	colour
300 lm	

**LED-KYOTO-P80**  
8031414883875  
lumen


colour temp.	colour
300 lm	

watt	2,5W
beam angle	120°

watt	2,5W
beam angle	120°



**Accessori inclusi / Included accessories**

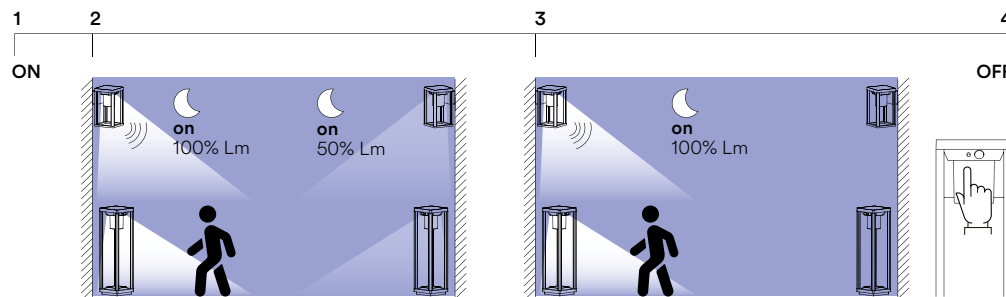

Sensore di movimento 100% luce  
Dopo 25 secondi 50% luce /  
Motion sensor 100% light  
After 25 seconds 50% light

Sensore di movimento 100% luce  
Dopo 25 secondi spegnimento luce /  
Motion sensor 100% light  
Light turns off after 25 seconds

# ENYA

Collezione in alluminio antracite con sensore e pannello solare.  
Anthracite aluminum collection with sensor and solar panel.



- Materiale**  
alluminio
- Colore**  
antracite goffrato
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminum
- Colour**  
embossed anthracite
- Colour temperature**  
4000K
- Driver**  
built-in



**LED-ENYA-AP**  
8031414883844  
lumen



colour temp.	colour
600 lm	

**LED-ENYA-P80**  
8031414883851  
lumen



colour temp.	colour
600 lm	

watt	5W
beam angle	120°

watt	5W
beam angle	120°



**Accessori inclusi / Included accessories**

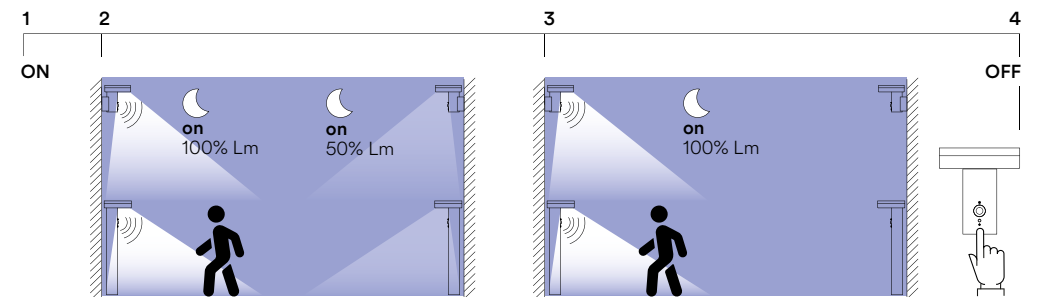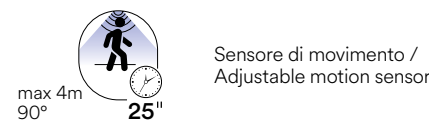

Sensore di movimento 100% luce  
Dopo 25 secondi 50% luce /  
Motion sensor 100% light  
After 25 seconds 50% light

Sensore di movimento 100% luce  
Dopo 25 secondi spegnimento luce /  
Motion sensor 100% light  
Light turns off after 25 seconds

# TED

Applique LED in alluminio antracite con sensore e pannello solare.  
Aluminum LED wall light anthracite finish with sensor and solar panel.



**Materiale**  
alluminio

**Colore**  
antracite

**Temperatura colore**  
4000K


**Driver**  
integrato

**Material**  
aluminum

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
built-in



**LED-TED-AP**  
8031414883837  
lumen

colour temp.	colour
300 lm	


watt	3W
beam angle	120°

Accessori inclusi / Included accessories

Pannello solare / Solar panel

**Li-ion 3,7V 2200 mAh**  
Batteria non sostituibile /  
Battery non replaceable

Sensore di movimento /  
Adjustable motion sensor  
max 4m  
90°  
25"

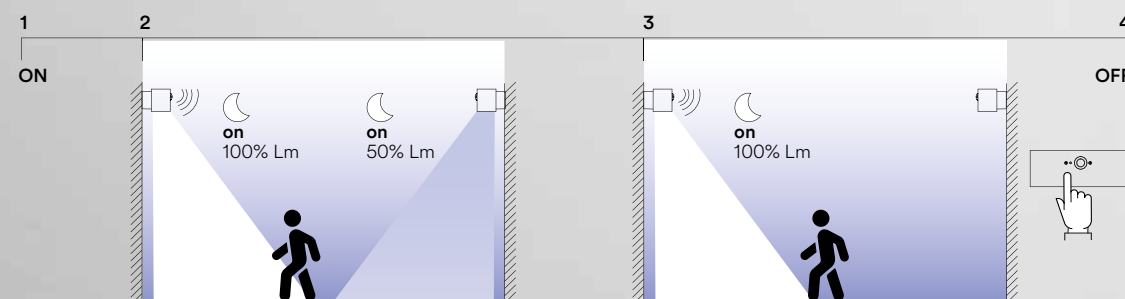

Sensore di movimento 100% luce  
Dopo 25 secondi 50% luce /  
Motion sensor 100% light  
After 25 seconds 50% light

Sensore di movimento 100% luce  
Dopo 25 secondi spegnimento luce /  
Motion sensor 100% light  
Light turns off after 25 seconds

# ALBERT

Applique LED in alluminio antracite con sensore e pannello solare.  
Aluminum LED wall light anthracite finish with sensor and solar panel.



**Materiale**  
alluminio

**Colore**  
antracite

**Temperatura colore**  
4000K


**Driver**  
integrato

**Material**  
aluminum

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
built-in



**LED-ALBERT-AP**  
8031414058716  
lumen

colour temp.	colour
300 lm	


watt	2,5W
beam angle	120°

Accessori inclusi / Included accessories

Pannello solare / Solar panel

**Li-ion 3,7V 2000 mAh**  
Batteria non sostituibile /  
Battery non replaceable

Sensore di movimento /  
Adjustable motion sensor  
max 4m  
90°  
25"

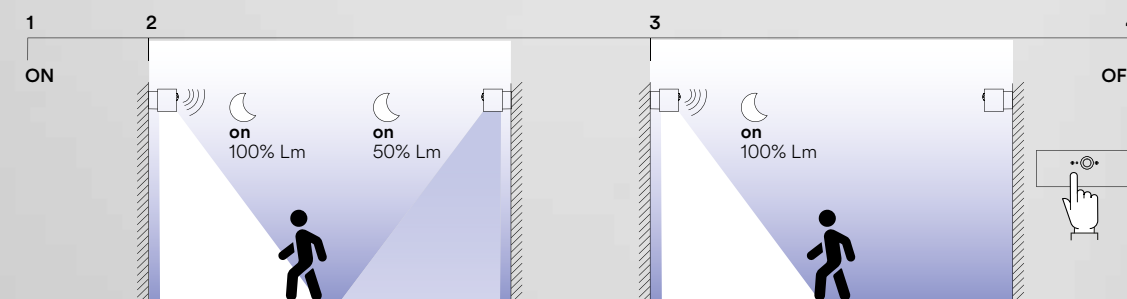


Sensore di movimento 100% luce  
Dopo 25 secondi 50% luce /  
Motion sensor 100% light  
After 25 seconds 50% light

Sensore di movimento 100% luce  
Dopo 25 secondi spegnimento luce /  
Motion sensor 100% light  
Light turns off after 25 seconds

# COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento regolabile.  
Flood light with battery power in black thermoplastic with adjustable motion sensor.

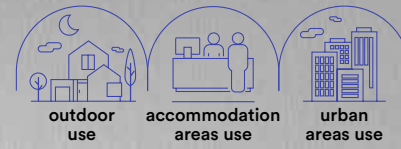

**Materiale**  
termoplastica

**Temperatura colore**

6500K



**Driver**  
integrato

**Material**  
thermoplastic

**Colour temperature**

6500K



**Driver**  
built-in




technical information **COSMO**




**LED-COSMO/S**  
8031439841263  
lumen

colour temp.	colour
80 lm	

watt	1W
beam angle	120°



**Accessori inclusi / Included accessories**



**off**  
10 LUX  
**on**  
2000 LUX

Sensore di movimento regolabile /  
Adjustable motion sensor

**Accessori non inclusi / Not included accessories**




**3 x 1,2V AAA**  
Batteria / Battery




**LED-COSMO/S-FV**  
8031439821265  
lumen

colour temp.	colour
80 lm	

watt	1W
beam angle	120°




**Accessori inclusi / Included accessories**



Pannello solare /  
Solar panel



**Li-ion 3,7V 1200 mAh**  
Batteria non sostituibile /  
Battery non replaceable /



**off**  
10 LUX  
**on**  
2000 LUX

Sensore di movimento regolabile,  
accensione con 15 lux /  
Adjustable motion sensor,  
switch on 15 lux



Cavo 3,4 m /  
3,4 m cable

# ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento regolabile.  
Silver aluminium flood light with solar panel and adjustable motion sensor.



**Materiale**  
alluminio

**Colore**  
antracite

**Temperatura colore**  
5000K


**Driver**  
integrato

**Material**  
aluminium

**Colour**  
anthracite

**Colour temperature**  
5000K


**Driver**  
built-in






**LED-ELIOS-SOLAR**  
8031440355124  
lumen

colour temp.	colour
6200K	●
5000K	●

watt	9W
beam angle	120°



**Accessori inclusi / Included accessories**

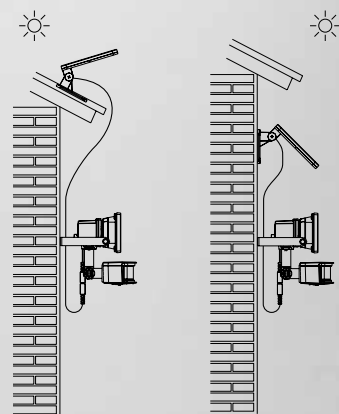

# EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.  
Silver thermoplastic flood light with solar panel, motion and crepuscular sensor.



**Materiale**  
termoplastica

**Colore**  
silver

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
thermoplastic

**Colour**  
silver

**Colour temperature**  
4000K


**Driver**  
built-in






**LED-EOS-SOLAR**  
8031414862740  
lumen

colour temp.	colour
4000K	●
3000K	●

watt	4W
beam angle	100°



**Accessori inclusi / Included accessories**

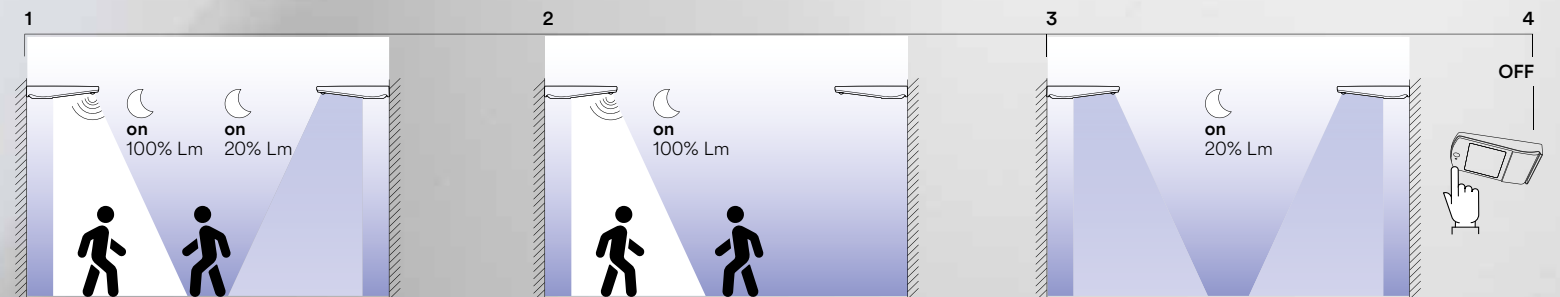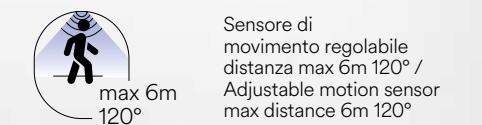

Sensore di movimento 100% luce  
Sensore crepuscolare 20% luce / Motion sensor 100% light. Crepuscular sensor 20% light

Sensore di movimento 100% luce  
No sensore crepuscolare / Motion sensor 100% light. No crepuscular sensor

Sensore crepuscolare 20% luce  
No sensore movimento / Crepuscular sensor 20% light. No motion sensor

# SKYP

Applique LED in termoplastica bianco con sensore e pannello solare.  
Thermoplastic LED wall light white finish with sensor and solar panel.



**Materiale**  
termoplastica


**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
thermoplastic

**Colour temperature**  
4000K


**Driver**  
built-in





**LED-SKYP-AP**  
8031414870783  
lumen

colour temp.	colour
130 lm	

watt	3W
beam angle	120°



**Accessori inclusi / Included accessories**

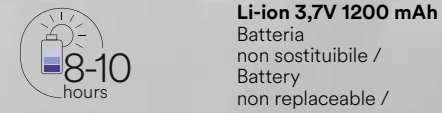

**Base easy-up** che permette il duplice utilizzo del faro come lampada da muro e lampada portatile / **Easy-up base** for double use of the lamp, as wall and portable lamp

# OPEN

Applique LED in termoplastica bianco con sensore e pannello solare.  
Thermoplastic LED wall light white finish with sensor and solar panel.



**Materiale**  
termoplastica

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
thermoplastic

**Colour temperature**  
4000K


**Driver**  
built-in





**LED-OPEN-AP**  
8031414870752  
lumen

colour temp.	colour
300 lm	

watt	3W
beam angle	120°



**Accessori inclusi / Included accessories**

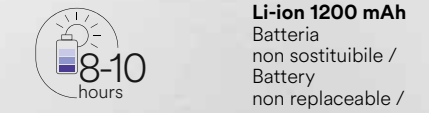

**Base easy-up** che permette il duplice utilizzo del faro come lampada da muro e lampada portatile / **Easy-up base** for double use of the lamp, as wall and portable lamp



# ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare, sensore di movimento e crepuscolare.  
 Anthracite aluminum flood light with acrylic diffuser, solar panel, motion and crepuscular sensor.



**Materiale**  
alluminio e acrilico

**Colore**  
antracite

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
aluminum and acrylic

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
built-in



<b>LED-ARGO-SOLAR</b> 8031414865345 lumen	colour temp. 130 lm	colour ●
watt beam angle	1,8W 120°	



Accessori inclusi / Included accessories	
	Pannello solare / Solar panel
	<b>Li-ion 3,7V 2200 mAh</b> Batteria non sostituibile / Battery non replaceable /
	Sensore di movimento / Motion sensor 5m 100° on 130Lm 1,5 hours 30"
	Sensore crepuscolare / Crepuscular sensor off on 26 Lm 8 horas

SOLARI / SOLAR LAMPS  
In.tec light



# SHIVA

Proiettore in termoplastica antracite con pannello solare e sensore di movimento.  
Anthracite thermoplastic flood light with solar panel and motion sensor.



**Materiale**  
termoplastica

**Colore**  
antracite

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
aluminum and acrylic

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
built-in



180°




## LED-SHIVA-SOLAR

8031414870769  
lumen





colour temp.	colour
●	●
●	●

230 lm

watt 2 x 1,5W  
beam angle 120°



### Accessori inclusi / Included accessories



**Base easy-up** che permette il duplice utilizzo del faro come lampada da muro e lampada portatile / **Easy-up base** for double use of the lamp, as wall and portable lamp



**3 x 1,2V AAA**  
non inclusa / not included

**Doppia funzione:** auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse) / **Double function:** auto recharge by solar panel or power by AAA battery (not included)

# ULYSSE

Proiettore in termoplastica antracite con pannello solare e sensore di movimento regolabile.  
Anthracite thermoplastic flood light with solar panel and adjustable motion sensor.



**Materiale**  
termoplastica

**Colore**  
antracite

**Temperatura colore**  
4000K

**Driver**  
integrato

**Material**  
thermoplastic

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
built-in




## LED-ULYSSE-SOLAR

8031414882588  
lumen




colour temp.	colour
●	●
●	●

1000 lm



watt 10W  
beam angle 120°



### Accessori inclusi / Included accessories



### Doppio sistema di montaggio / Double mounting system

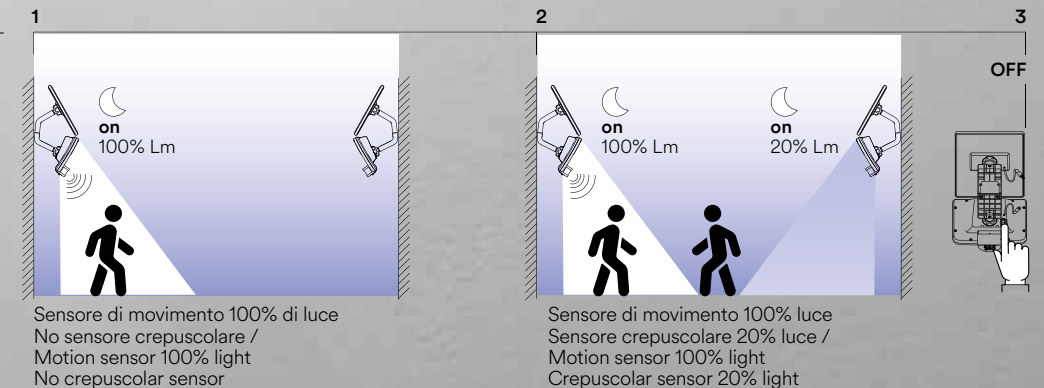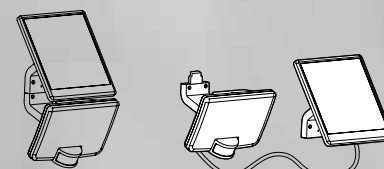

# GLASER

Glaser è il proiettore a batteria con ricarica solare.  
Un dispositivo pratico ed efficiente per l'illuminazione sostenibile.  
Glaser is the battery-powered floodlight with solar charging.  
A practical and efficient device for sustainable lighting.



**Materiale**  
alluminio

**Colore**  
silver

**Temperatura colore**  
3000K / 4000K



**Material**  
aluminum

**Colour**  
silver


**Colour temperature**  
3000K / 4000K



technical information **GLASER**



	colour temp.	colour
<b>LED-GLASER-SOL100C</b> 8031414917082		
lumen	1200 lm	
<b>LED-GLASER-SOL100M</b> 8031414917075		
lumen	1200 lm	
beam angle	120°	

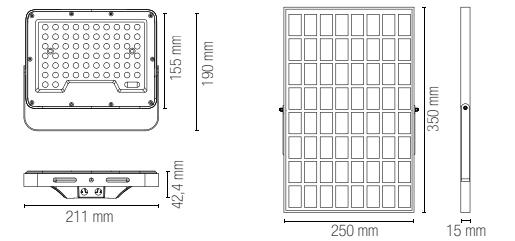

entrata cavo DC /  
DC connector


**Accessori inclusi / Included accessories**



**Li-ion 3.2V 10Ah**  
Batteria non sostituibile /  
Battery non replaceable



	colour temp.	colour
<b>LED-GLASER-SOL200C</b> 8031414917105		
lumen	1800 lm	
<b>LED-GLASER-SOL200M</b> 8031414917099		
lumen	1800 lm	
beam angle	120°	

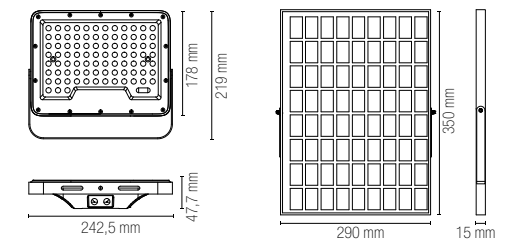

entrata cavo DC /  
DC connector


**Accessori inclusi / Included accessories**



**Li-ion 3.2V 15Ah**  
Batteria non sostituibile /  
Battery non replaceable



	colour temp.	colour
<b>LED-GLASER-SOL400C</b> 8031414917129		
lumen	3500 lm	
<b>LED-GLASER-SOL400M</b> 8031414917112		
lumen	3500 lm	
beam angle	120°	

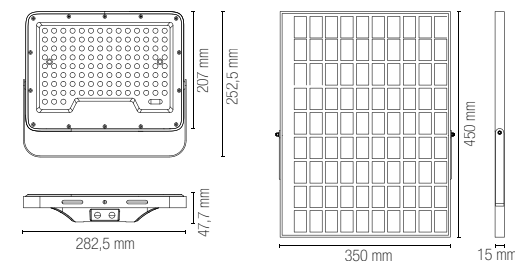


entrata cavo DC /  
DC connector

**Accessori inclusi / Included accessories**



**Li-ion 3.2V 24Ah**  
Batteria non sostituibile /  
Battery non replaceable

**Accessori inclusi / Included accessories**



Pannello solare /  
Solar panel



Batteria non sostituibile /  
Battery non replaceable



Telecomando /  
Remote control

**Accessorio non incluso / Not included accessory**

**LED-GLASER-CABLE**  
8031414917136

Cavo 2 m per pannello solare  
con attacco maschio/femmina /  
2 m extension cable for  
solar panel with male/female



# LUXOR

Lampione solare LUXOR, versatile con doppia opzione di installazione come applique o palo.  
LUXOR solar streetlight, versatile with dual installation options as a sconce or a pole.

**Materiale**  
PC

**Colore**  
antracite



**Temperatura colore**  
3000K / 4000K



**Material**  
PC

**Colour**  
anthracite



**Colour temperature**  
3000K / 4000K



	colour temp.	colour
<b>LED-LUXOR-6C-SOLAR</b> 8031414921898 lumen		
	600 lm	
<b>LED-LUXOR-6M-SOLAR</b> 8031414921904 lumen		
	600 lm	
watt	6,5W	
beam angle	90° x 110°	



**Accessori inclusi / Included accessories**



Pannello solare / Solar panel



**Li-ion 3.7V 5.4AH**  
Batteria non sostituibile / Battery non replaceable /

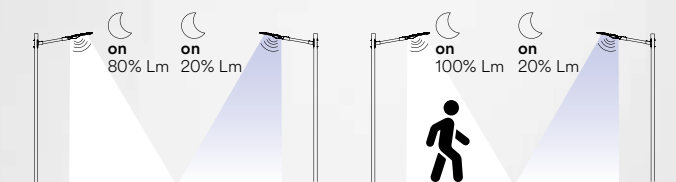


**Interruttore per due funzioni / Switch for two functions**

1. Sensore crepuscolare  
ON 100% luce per 10 min  
Dopo 2 ore graduale riduzione fino al 10% luce /  
Crepuscular sensor  
ON 100% light for 10 min  
After 2 hours gradual reduction to 10% light

2. Sensore di movimento  
ON 100% luce  
Dopo 20 secondi 20% luce /  
Motion sensor  
ON 100% light  
After 20 seconds 20% light

# OUTDOOR

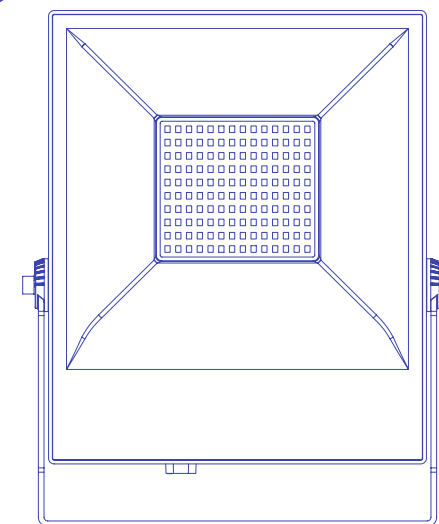

PROIETTORI  
FLOOD LIGHTS



**Proiettore con telecamera di sicurezza colore antracite con funzione smart Wi-Fi, compatibili con dispositivi iOS, android e VOICE CONTROL.**


Flood light with security camera, anthracite, smart Wi-Fi, compatible with iOS devices, android and VOICE CONTROL devices.



technical information **VYSOR**




- Materiale**  
alluminio + PC
- Colore**  
antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
aluminium + PC
- Colour**  
anthracite
- Colour temperature**  
4000K
- Driver**  
built-in


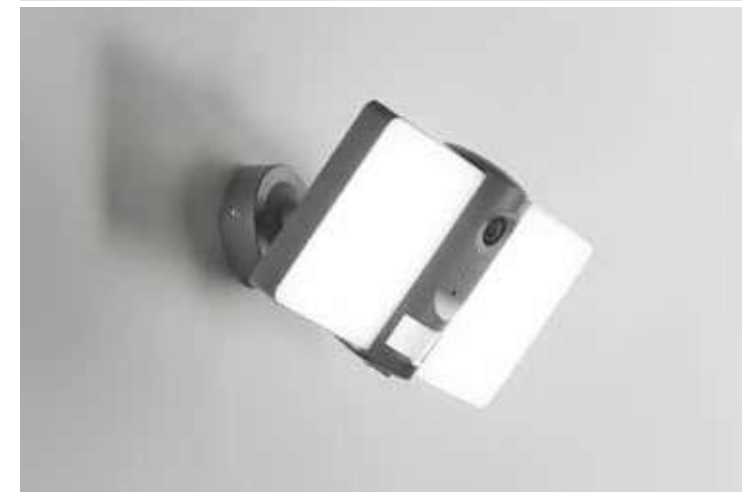


**LED-VYSOR-SECURITY**  
8031414871810  
lumen 2640 lm

watt 20W  
beam angle 120°






<p>Tipo di sensore video Video sensor type</p> <p>Pixel</p> <p>Illuminazione minima Min illuminance</p> <p>Angolo vista camera Camera view angle</p> <p>Otturatore Shutter</p> <p>Infrarossi IR</p> <p>WDR</p> <p>Video compression standard</p> <p>Risoluzione video Max picture size</p> <p>Frequenza fotogrammi Frame rate</p> <p>Audio</p> <p>Memoria (non inclusa) Storage (not included)</p> <p>Impostazione immagine Image setting</p> <p>Reset</p> <p>Controllo della luce Lighting control</p> <p>Interfaccia di protocollo Interface protocol</p> <p>Comunicazione di protocollo Communication protocol</p> <p>Funzioni generali General function</p> <p>Wi-Fi</p> <p>PIR</p>	<p><b>1/2,9" CMOS</b></p> <p><b>2.0 Mega</b></p> <p>Color 0.10lux @F2.0, black and white 0.01lux @F2.0</p> <p><b>135°</b></p> <p>1/25-1/100,000 per second</p> <p><b>High power LED with ICR</b></p> <p><b>Digital WDR</b></p> <p><b>H.264</b> 32Kbps - 2Mbps</p> <p><b>1920x1080</b></p> <p><b>1-20 per second</b></p> <p><b>Full duplex audio (doppio sistema di comunicazione)</b></p> <p><b>Support SD card (MAX 128Gb) Cloud storage NVR</b></p> <p><b>Support HD/SD; support mirror</b></p> <p><b>Support</b></p> <p><b>Support manual, sensor, plan switch light (gestione accensioni)</b></p> <p><b>Private</b></p> <p><b>TCP/IP, HTTP, DHCP, DNS, RTSP</b></p> <p><b>Dual stream, password protection</b></p> <p><b>IEEE802.11b/g/n</b></p> <p><b>Support PIR and motion detection</b></p>
---	---

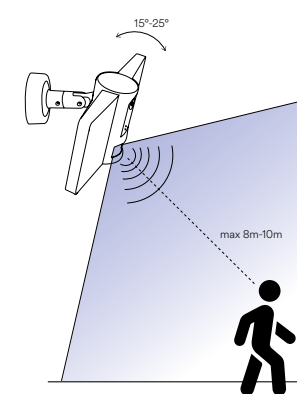

Control system easy installation

Full duplex audio



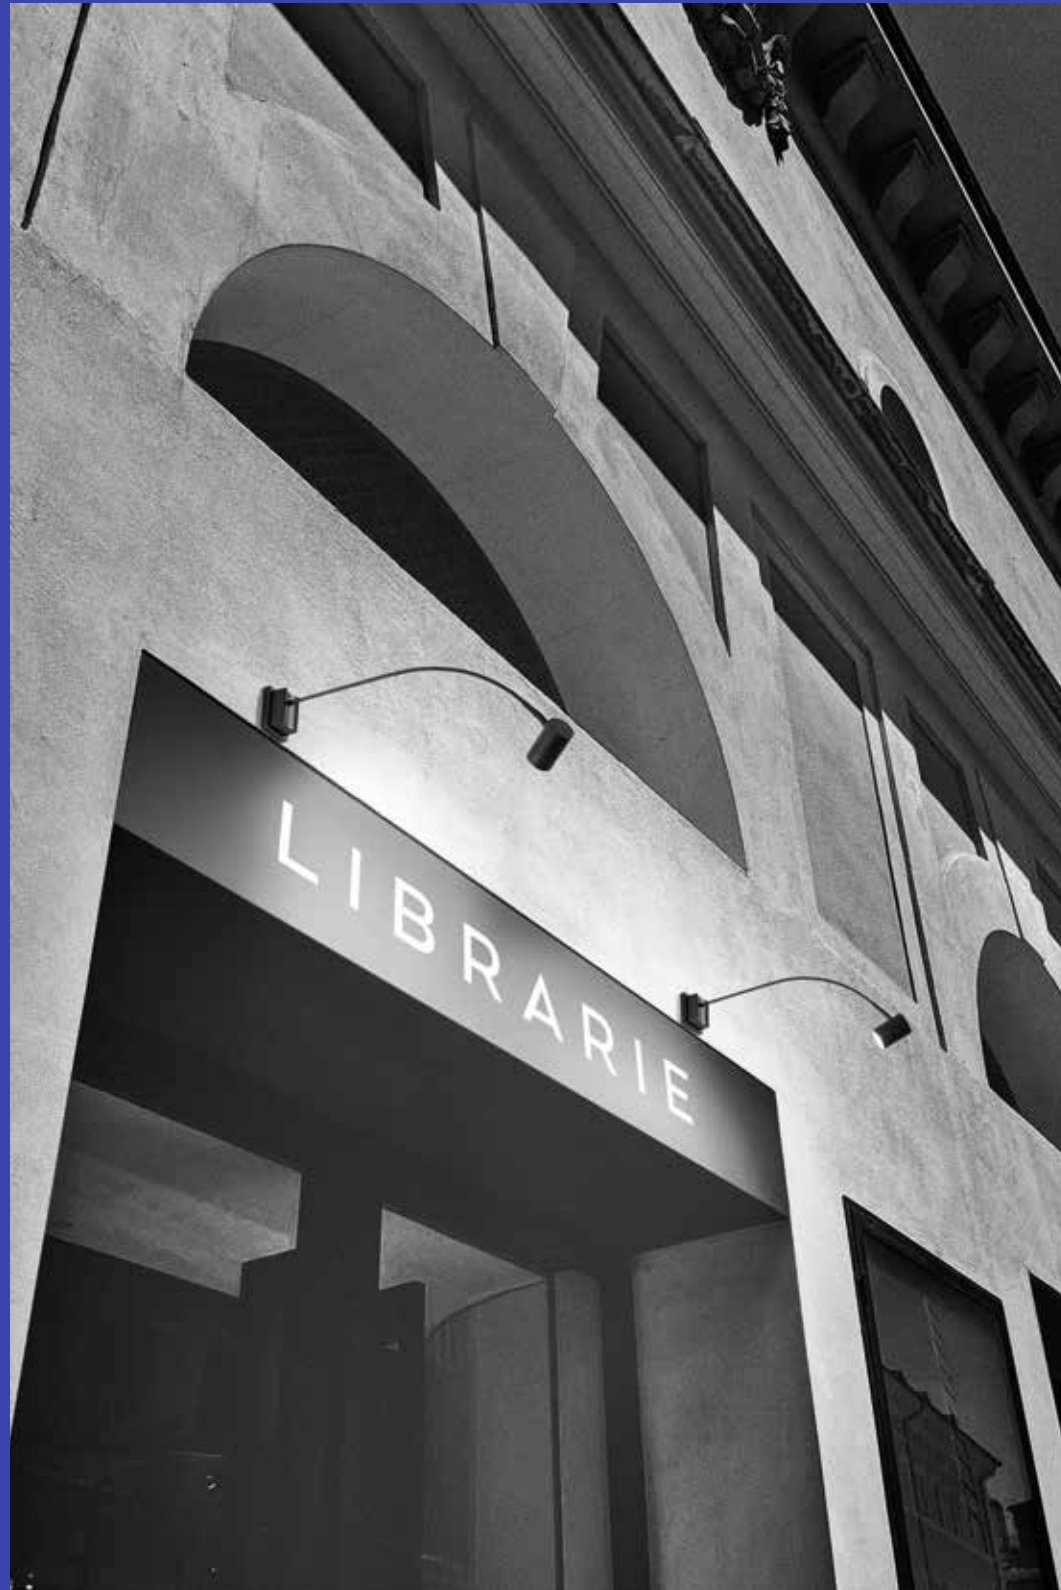

**Materiale**  
metallo

**Colore**  
nero satinato




**Material**  
metal



**Colour**  
satin black



**Proiettore in metallo nero satinato con struttura flessibile e punto luce orientabile.**  
Black satin metal projector with flexible structure and adjustable light point.

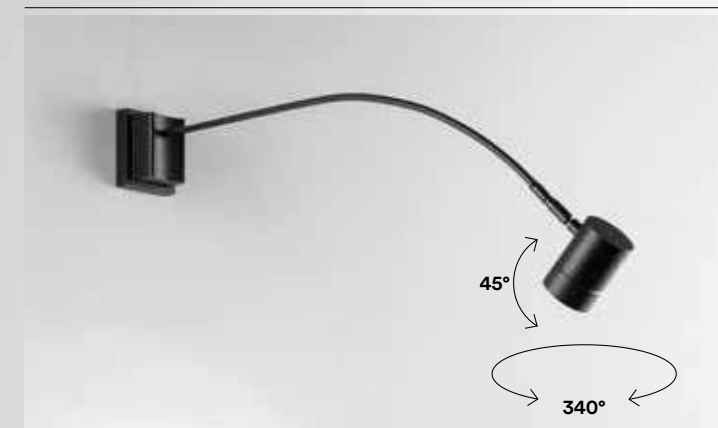

	colour	
<b>I-BANNER-AP</b> 8031414883004	●	
1 x GU10 MAX 35W		Lampadina non inclusa / Light bulb not included



- Materiale**  
termoplastica
- Colore**  
antracite
- Temperatura colore**  
4000K
- Driver**  
integrato
- Material**  
thermoplastic
- Colour**  
anthracite
- Colour temperature**  
4000K
- Driver**  
included


**Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare regolabile.**  
Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with adjustable night and motion sensor.



**LED-SAT-10**  
8031414868261  
lumen

colour temp.	colour
1200 lm	


watt	10W
beam angle	120°



**LED-SAT-20**  
8031414868278  
lumen

colour temp.	colour
2400 lm	

watt	2 x 10W
beam angle	120°



**Accessori inclusi / Included accessories**

Sensore di movimento regolabile / Adjustable motion sensor



# AXEL

Proiettore in alluminio LED integrato finitura bianco o silver goffrato.  
Built-in LED aluminium flood lamp embossed white or silver finish.



**Materiale**  
alluminio  
diffusore acrilico

**Colore**  
bianco goffrato  
silver goffrato



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminium  
acrylic diffuser

**Colour**  
embossed white  
embossed silver



**Colour temperature**  
3000K / 4000K



**Driver**  
built-in



collection **AXEL**








**LED-AXEL-10-BCO**  
8031414918744

lumen	1100 lm
watt	10W
beam angle	100°
pf	-

colour temp. colour

● ● ●




**LED-AXEL-20-BCO**  
8031414918751

lumen	2200 lm
watt	20W
beam angle	100°
pf	-

colour temp. colour

● ● ●




**LED-AXEL-50-BCO**  
8031414918768

lumen	5500 lm
watt	50W
beam angle	100°
pf	0.90

colour temp. colour

● ● ●




**LED-AXEL-10-SIL**  
8031414918676

lumen	1100 lm
watt	10
beam angle	100°
pf	-

colour temp. colour

● ● ●




**LED-AXEL-20-SIL**  
8031414918683

lumen	2200 lm
watt	20W
beam angle	100°
pf	-

colour temp. colour

● ● ●




**LED-AXEL-30-SIL**  
8031414918690

lumen	3300 lm
watt	30W
beam angle	100°
pf	0.90

colour temp. colour

● ● ●




**LED-AXEL-50-SIL**  
8031414918706


lumen	5500 lm
watt	50W
beam angle	100°
pf	0.90

colour temp. colour


● ● ●



Fotometria del prodotto / Photometric curve

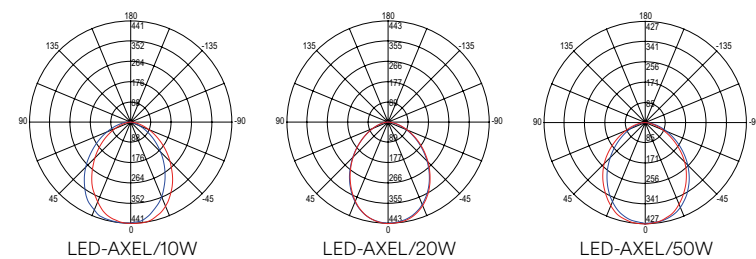

Fotometria del prodotto / Photometric curve

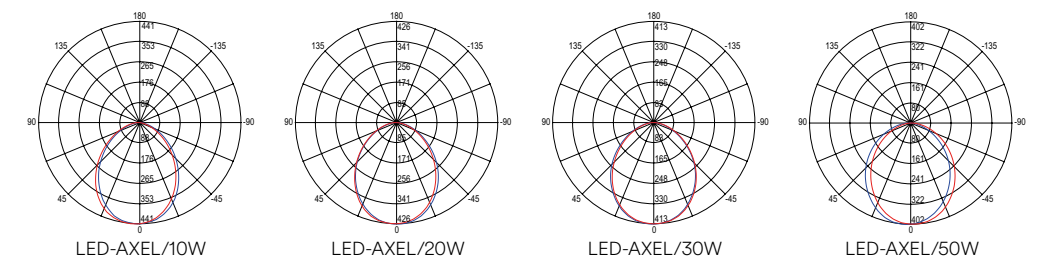

# AXEL SENSOR

Proiettore in alluminio LED integrato finitura silver con sensore di movimento e crepuscolare regolabile.  
Built-in LED aluminium flood lamp embossed silver finish with adjustable night and motion sensor.



**Materiale**  
alluminio

**Colore**  
silver goffrato

**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato


**Material**  
aluminium

**Colour**  
embossed silver

**Colour temperature**  
3000K / 4000K



**Driver**  
built-in



**Accessori inclusi / Accessories included**

Sensore di movimento regolabile / Adjustable motion sensor





max 8m  
120°  
10<sup>sec</sup> - 7<sup>min</sup>  
off on  
3-2000 LUX



**LED-AXEL-S10-SIL**  
8031414918713  
lumen

colour temp. colour  
1100 lm



watt 10W  
beam angle 110°

**Accessori inclusi / Accessories included**

Sensore di movimento regolabile / Adjustable motion sensor





max 8m  
120°  
10<sup>sec</sup> - 7<sup>min</sup>  
off on  
3-2000 LUX



**LED-AXEL-S30-SIL**  
8031414918737  
lumen

colour temp. colour  
3300 lm



watt 30W  
beam angle 110°

# AXEL PORTABLE

Proiettore LED portatile.  
LED portable flood light.



**Materiale**  
alluminio

**Colore**  
giallo/nero



**Temperatura colore**  
3000K / 4000K



**Driver**  
integrato

**Material**  
aluminium


**Colour**  
yellow/black



**Colour temperature**  
3000K / 4000K



**Driver**  
built-in



**Accessori inclusi / Included accessories**




Cavo 1,6 metri con spina / 1,6 meter cable with plug



**LED-AXEL-P20-NER**  
8031414918720  
lumen

colour temp. colour  
2200 lm



watt 20W  
beam angle 110°

# BULL

La collezione Bull presenta i proiettori portatili a batteria, disponibili in due versioni: con e senza bluetooth integrato.

The Bull collection presents battery-powered portable projectors, available in two versions: with and without built-in Bluetooth.



collection **BULL**

**Materiale**  
plastica

**Colore**  
giallo/nero



**Temperatura colore**  
4000K



**Driver**  
integrato

**Material**  
plastic

**Colour**  
yellow/black



**Colour temperature**  
4000K




**Driver**  
built-in



**LED-BULL-15DJ**  
8031414917167  
lumen

colour temp.	colour
1200 lm	


watt	15W
beam angle	90°
switch DIMMER	25% 50% 70% 100% OFF



**LED-BULL-10**  
8031414917150  
lumen

colour temp.	colour
1000 lm	

watt	10W
beam angle	90°
switch DIMMER	25% 50% 70% 100% OFF



**SPEAKER**

2x5W connessione bluetooth 4.2 max 10 m /  
2x5W bluetooth 4.2 connection max 10 m

**Accessori inclusi / Included accessories**



**USB**  
Cavo per ricarica 60 cm /  
60 cm charging cable



**3.7V/6600 mAh**  
Batteria ricaricabile, non sostituibile /  
Rechargeable battery, non replaceable

**Accessori inclusi / Included accessories**



**USB**  
Cavo per ricarica 60 cm /  
60 cm charging cable



**3.7V/6600 mAh**  
Batteria ricaricabile, non sostituibile /  
Rechargeable battery, non replaceable



Adattatore non incluso /  
Adaptor not included



# KNOX

Realizzato in plastica e alluminio, Knox è un proiettore con temperatura selezionabile e con doppia presa schuko.  
Made of plastic and aluminum, Knox is a fixture with selectable temperature and dual schuko plugs.



**Materiale**  
plastica

**Colore**  
giallo/nero



**Temperatura colore selezionabile**  
3000K / 4000K



**Driver**  
integrato

**Material**  
plastic

**Colour**  
yellow/black



**Selectable color temperature**  
3000K / 4000K



**Driver**  
built-in




technical information **KNOX**



**LED-KNOX-45**  
8031414917174  
lumen

colour temp.	colour
2500 - 4959 lm	

watt	45W
beam angle	120°
	Plug 2X max 15A 250V 2500W



**Accessori inclusi / Included accessories**


Cavo 3 metri con spina / 3 meter cable with plug



**LED-KNOX-80**  
8031414917181  
lumen

colour temp.	colour
4600 - 9200 lm	

watt	80W
beam angle	120°
	Plug 2X max 15A 250V 2500W



**Accessori inclusi / Included accessories**

Cavo 3 metri con spina / 3 meter cable with plug

# ATHOS

Proiettore a led integrato in alluminio silver e diffusore satinato.  
Built-in LED aluminium flood lamp silver finish with satin diffuser.




<b>Materiale</b> alluminio	<b>Material</b> aluminium
<b>Colore</b> silver	<b>Colour</b> silver
<b>Temperatura colore</b> 4000K / 6000K	<b>Colour temperature</b> 4000K / 6000K
<b>Driver</b> integrato	<b>Driver</b> built-in




technical information **ATHOS**




<b>LED-ATHOS-100</b> 8031414884186	colour temp.	colour
lumen	10115 lm	
<b>LED-ATHOS-100F</b> 8031414884193		
lumen	9624 lm	
watt	100W	
beam angle	120°	
pf	0.90	




<b>LED-ATHOS-150</b> 8031414884209	colour temp.	colour
lumen	14557 lm	
<b>LED-ATHOS-150F</b> 8031414884216		
lumen	14388 lm	
watt	150W	
beam angle	120°	
pf	0.90	



<b>LED-ATHOS-200</b> 8031414884223	colour temp.	colour
lumen	20371 lm	
<b>LED-ATHOS-200F</b> 8031414884230		
lumen	20310 lm	
watt	300W	
beam angle	120°	
pf	0.90	



Fotometria del prodotto / Photometric curve

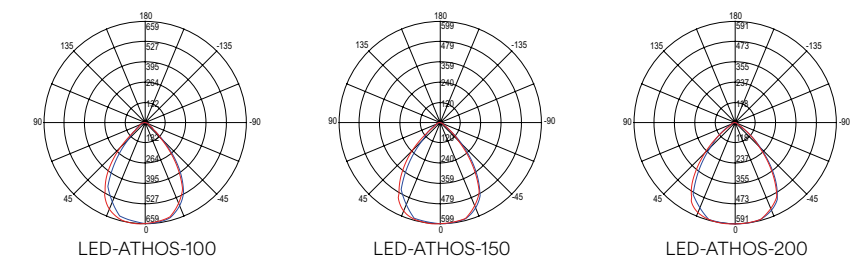

# TAURUS

Proiettore a led integrato in alluminio nero diffusore in vetro temperato.  
Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser.



technical information **TAURUS**



**Materiale**  
alluminio

**Colore**  
nero



**Temperatura colore**  
4000K / 6500K



**Driver**  
integrato

**Durata e on/off**  
50.000 h  
>25.000 on/off

**Material**  
aluminium

**Colour**  
black




**Colour temperature**  
4000K / 6500K




**Driver**  
built-in

**Life time and on/off**  
50.000 h  
>25.000 on/off


Fotometria del prodotto / Photometric curve

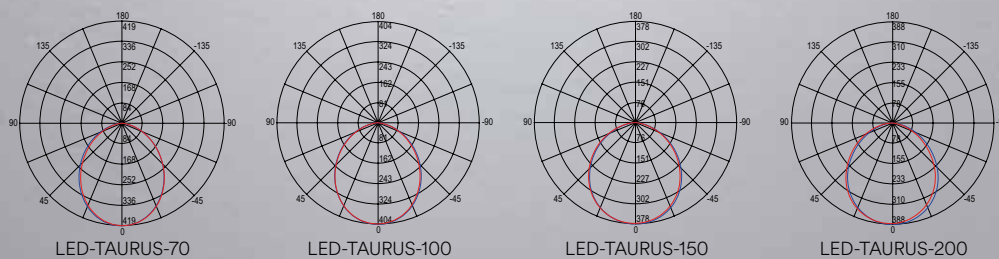


	colour temp.	colour
<b>LED-TAURUS-70</b> 8031414875757		
lumen	8400 lm	
<b>LED-TAURUS-70F</b> 8031414876662		
lumen	8400 lm	
watt	70W	
beam angle	110°	
pf	0.90	




	colour temp.	colour
<b>LED-TAURUS-100</b> 8031414875764		
lumen	12000 lm	
<b>LED-TAURUS-100F</b> 8031414876631		
lumen	12000 lm	
watt	100W	
beam angle	110°	
pf	0.90	



	colour temp.	colour
<b>LED-TAURUS-150</b> 8031414875771		
lumen	18000 lm	
<b>LED-TAURUS-150F</b> 8031414876648		
lumen	18000 lm	
watt	150W	
beam angle	110°	
pf	0.90	



	colour temp.	colour
<b>LED-TAURUS-200</b> 8031414875788		
lumen	26000 lm	
<b>LED-TAURUS-200F</b> 8031414876655		
lumen	26000 lm	
watt	200W	
beam angle	110°	
pf	0.90	





**I-FRAME-L-BCO**  
8031440364577

Staffa fissaggio angolare  
colore bianco      Metal corner wall  
arms white color



**I-FRAME-L-GR**  
8031440361880

Staffa fissaggio angolare  
colore grigio      Metal corner wall  
arms gray color



**I-FRAME-V-BCO**  
8031440364553

Staffa V mobile 30°  
fissaggio parete  
colore bianco      Metal wall arms  
orientable 30°  
white color



**I-FRAME-V-GR**  
8031440364584

Staffa V mobile 30°  
fissaggio parete  
colore grigio      Metal wall arms  
orientable 30°  
gray color



**I-TRIPOD**

8031440361729


Accessori per proiettori  
Sistema di fissaggio  
singolo e doppio      Flood light accessories  
Single and double  
connection system

**Accessori inclusi /  
Included accessories**



Cavo 2,8 metri  
con spina /  
2,8 meter cable  
with plug


**IP44**

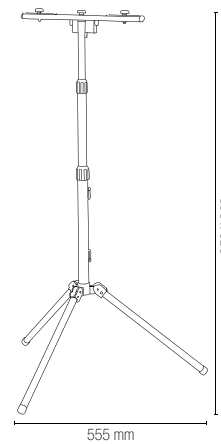

**I-SPIKE-ANT**

8031414877973

Picchetto alluminio  
antracite      Anthracite aluminum  
spike



# GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato.  
Built-in LED floor light die-cast aluminium body and tempered glass diffuser.

**Materiale**  
alluminio

**Colore**  
nero

**Temperatura colore**  
6000K

**Driver**  
incluso

**Durata e on/off**  
50.000 h  
>25.000 on/off

**Material**  
aluminium

**Colour**  
black

**Colour temperature**  
6000K

**Driver**  
included


**Life time and on/off**  
50.000 h  
>25.000 on/off



technical information GIOVE



Fotometria del prodotto  
Photometric curve

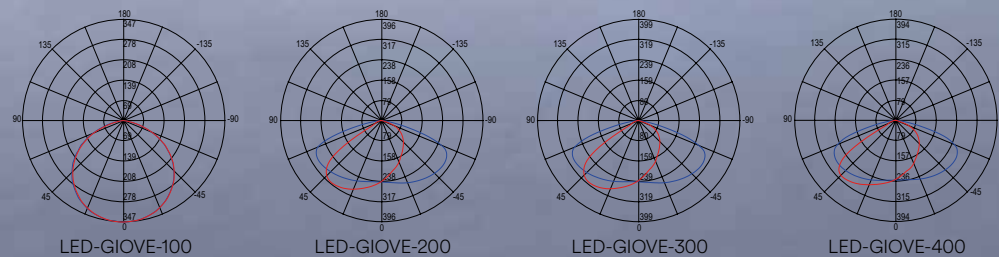


## LED-GIOVE-100

8031414882557  
lumen

colour temp.	beam angle	colour
	150° x 80°	

watt 100W  
pf 0.90



## LED-GIOVE-200

8031414876365  
lumen

colour temp.	beam angle	colour
	150° x 80°	

8031414885138  
lumen

colour temp.	beam angle	colour
	30°	

8031414885145  
lumen

colour temp.	beam angle	colour
	60°	

8031414885152  
lumen

colour temp.	beam angle	colour
	30°	

8031414885169  
lumen

colour temp.	beam angle	colour
	60°	


8031414885176  
lumen

colour temp.	beam angle	colour
	30°	

8031414885183  
lumen

colour temp.	beam angle	colour
	60°	

watt 200W  
pf 0.90




## LED-GIOVE-300

8031414876372  
lumen

colour temp.	beam angle	colour
	150° x 80°	

watt 300W  
pf 0.90




## LED-GIOVE-400

8031414876389  
lumen

colour temp.	beam angle	colour
	150° x 80°	

watt 400W  
pf 0.90

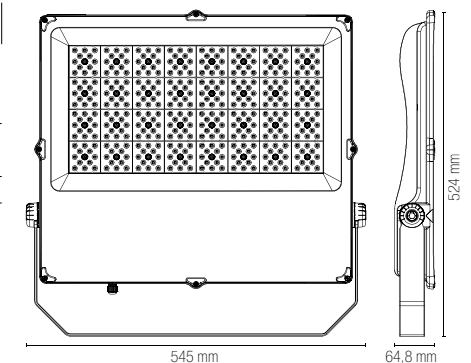







**Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.**  
 Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.

- Materiale**  
alluminio
- Colore**  
nero
- Temperatura colore**  
5700K
- Driver**  
incluso
- Durata e on/off**  
50.000 h  
>25.000 on/off
- Material**  
aluminium
- Colour**  
black
- Colour temperature**  
5700K
- Driver**  
included
- Life time and on/off**  
50.000 h  
>25.000 on/off

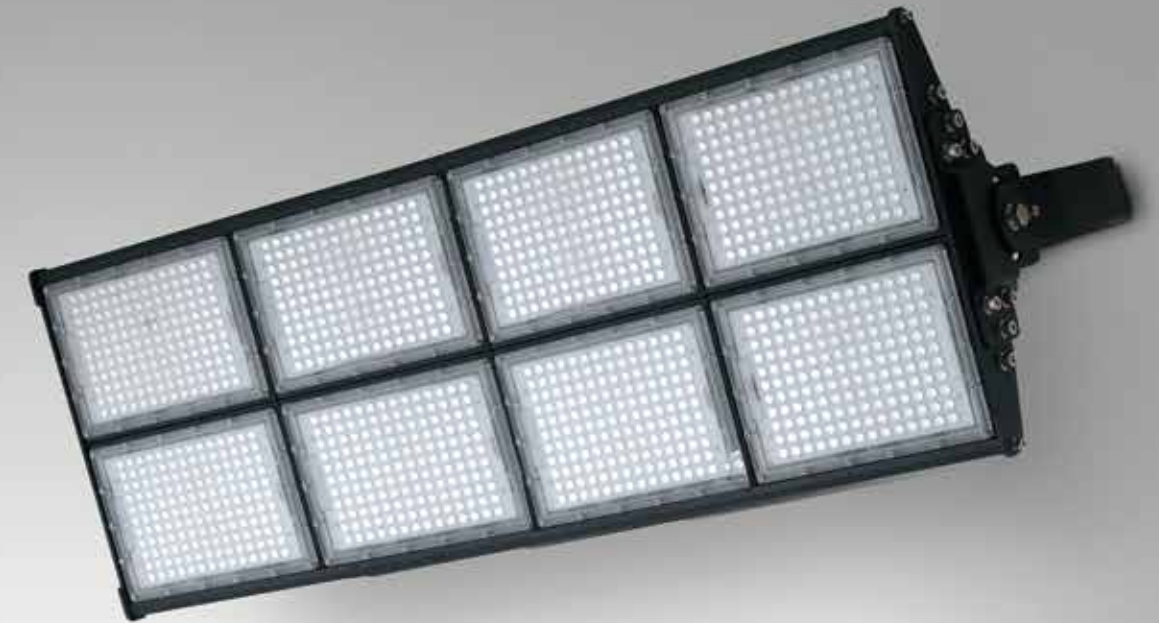

<b>LED-MASTER-960</b> 8031414862122	colour temp.	colour	
lumen	129600 lm		
watt	960W		LED-MASTER-960
beam angle	60° x 100°		
pf	0,90		

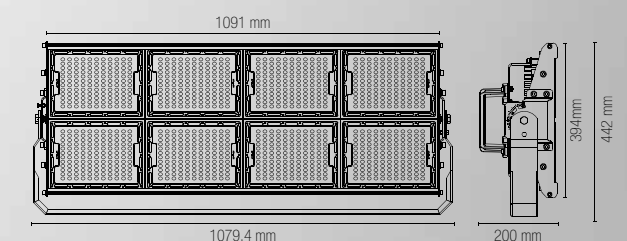

# ENERGY

Faro LED integrato per pensiline struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.

Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.



**Materiale**  
alluminio

**Material**  
aluminium

**Colore**  
bianco

**Colour**  
white

**Temperatura colore**  
4000K


**Colour temperature**  
4000K

**Driver**  
incluso

**Driver**  
included

**Durata e on/off**  
50.000 h  
>25.000 on/off

**Life time and on/off**  
50.000 h  
>25.000 on/off

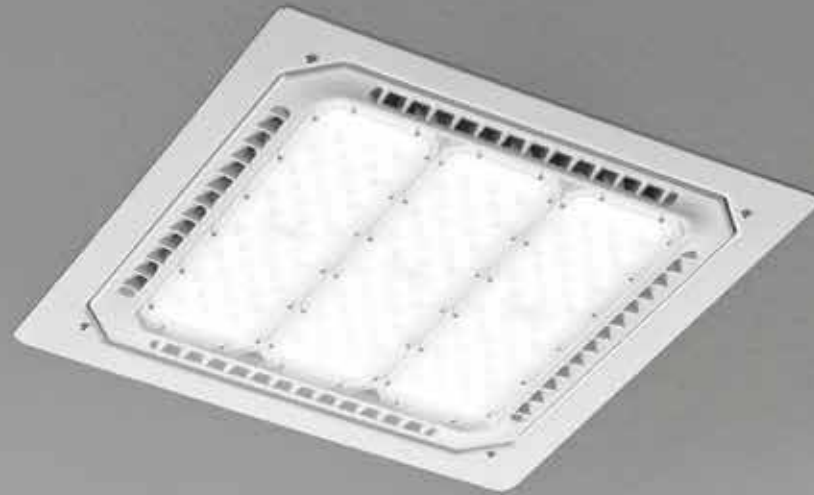

technical information **ENERGY**




## LED-ENERGY-80-INC

8031414862085  
lumen

colour temp.	colour
●	●
11000 lm	

watt	80W
beam angle	80°
pf	0.90

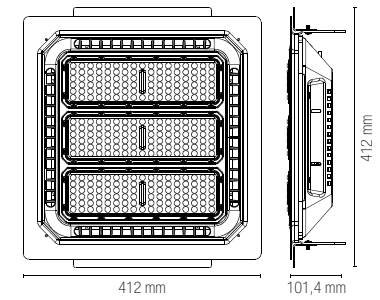


## LED-ENERGY-80-PL


8031414862078  
lumen

colour temp.	colour
●	●
11000 lm	


watt	80W
beam angle	80°
pf	0.90

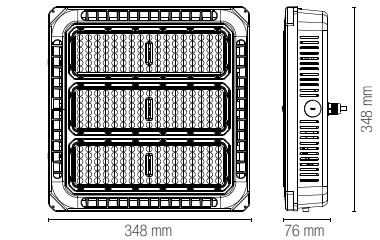

Fotometria del prodotto / Photometric curve

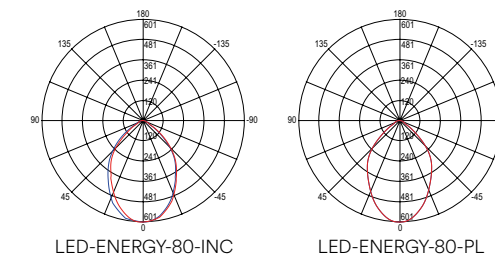

# OUTDOOR

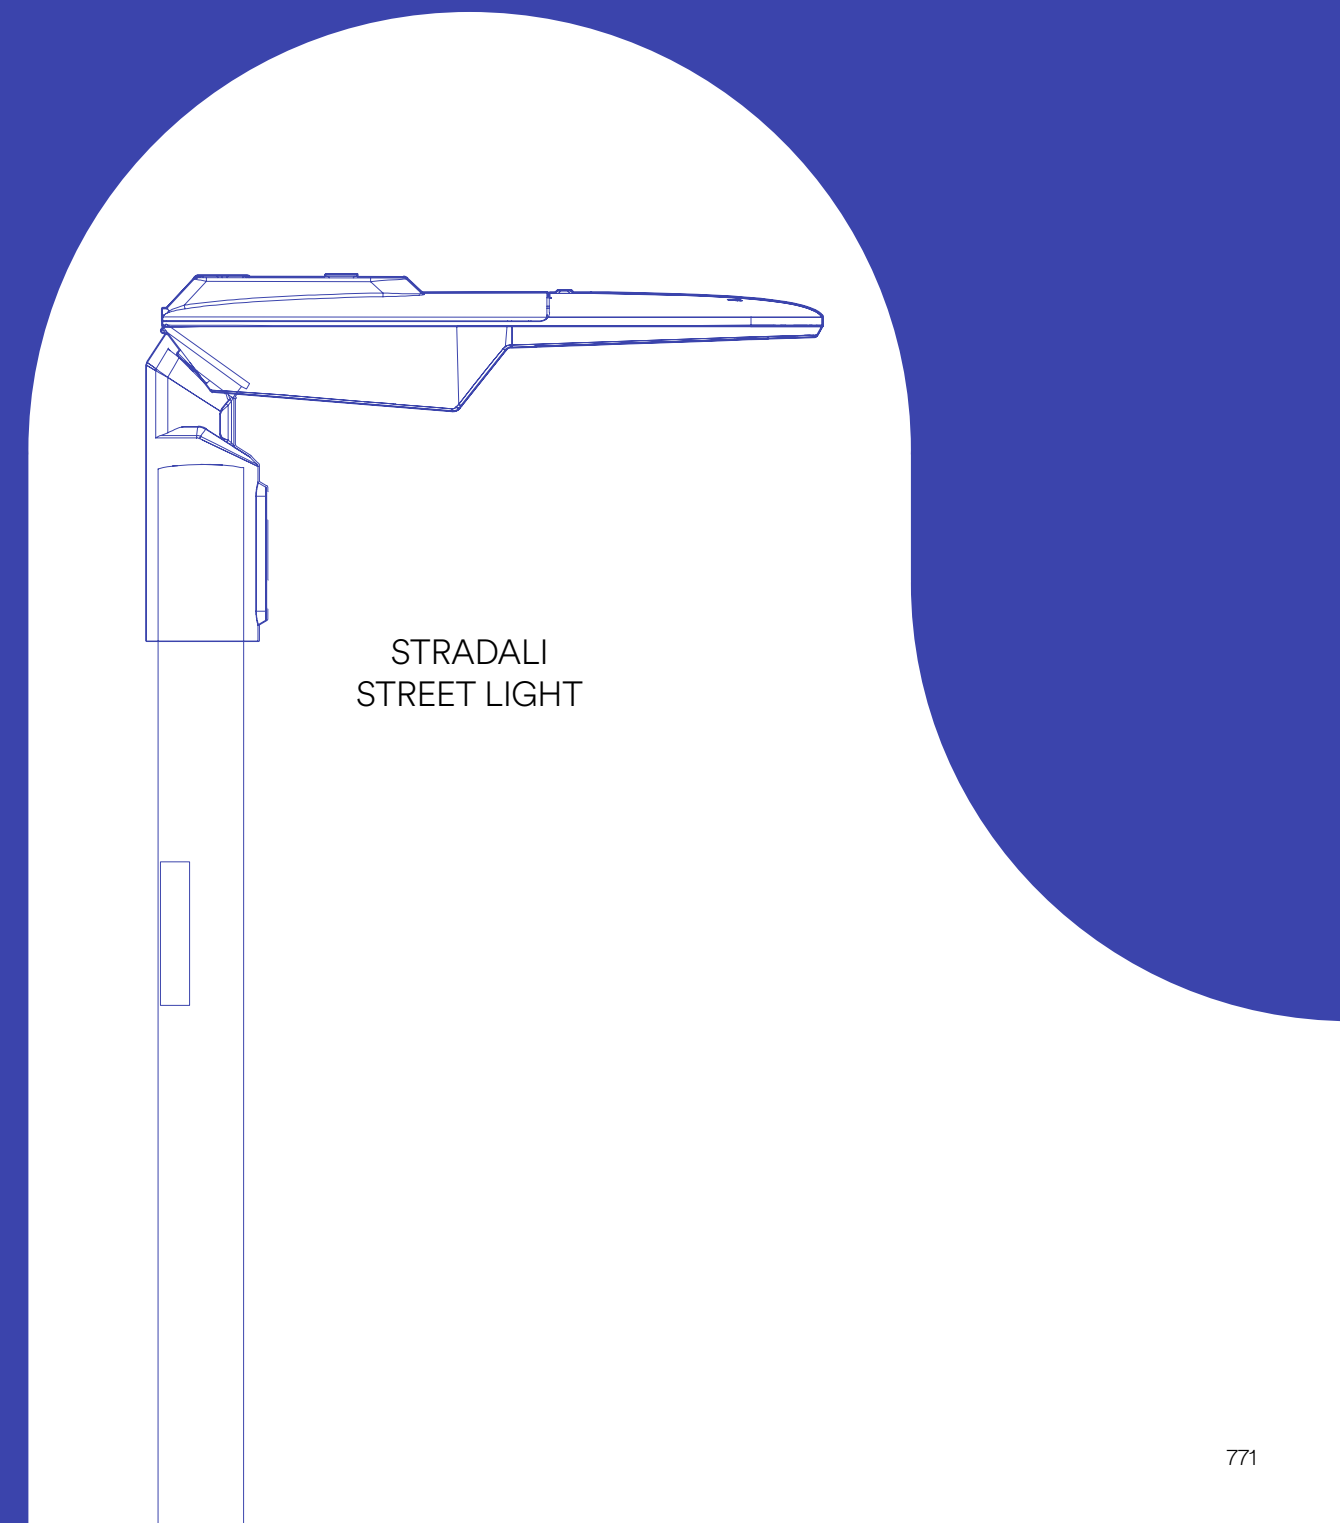

STRADALI  
STREET LIGHT

# AUREUS

Faro stradale LED in alluminio con pannello solare integrato.  
Aluminum LED street light with integrated solar panel.



**Materiale**  
alluminio

**Colore**  
antracite



**Temperatura colore**  
3000K / 4000K



**Driver**  
incluso

**Material**  
aluminum

**Colour**  
anthracite



**Colour temperature**  
3000K / 4000K



**Driver**  
included



technical information **AUREUS**



**LED-AUREUS-20C-SOLAR**

8031414921874

lumen

colour temp.



1600 lm

colour



**LED-AUREUS-20M-SOLAR**

8031414921881

lumen


1600 lm

watt

20W


beam angle

80° x 80°



**Accessori inclusi / Included accessories**


Pannello solare /  
Solar panel



**3.2V 20Ah LiFePO4**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable



Radiocomando /  
Remote control

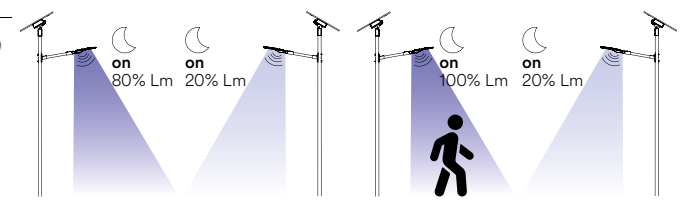

**Interruttore per due funzioni / Switch for two functions**

1. Sensore crepuscolare  
ON 100% luce per 10 min  
Dopo 2 ore graduale  
riduzione fino al 10% luce /  
Crepuscular sensor  
ON 100% light for 10 min  
After 2 hours gradual  
reduction to 10% light

2. Sensore di movimento  
ON 100% luce  
Dopo 20 secondi 20% luce /  
Motion sensor  
ON 100% light  
After 20 seconds 20% light

# RADIUS

Faro stradale LED in alluminio silver con pannello solare.  
Silver aluminum LED street light with solar panel.



**Materiale**  
alluminio

**Colore**  
silver

**Temperatura colore**  
3000K / 4000K

**Driver**  
incluso

**Material**  
aluminum

**Colour**  
silver

**Colour temperature**  
3000K / 4000K

**Driver**  
included



technical information **RADIUS**



**LED-RADIUS-15C-SOLAR**

8031414917006

lumen 2100 lm

**LED-RADIUS-15M-SOLAR**

8031414917013



lumen 2100 lm

watt 48W  
beam angle 80° x 140°  
pf 0.90

colour temp. colour

2100 lm

2100 lm

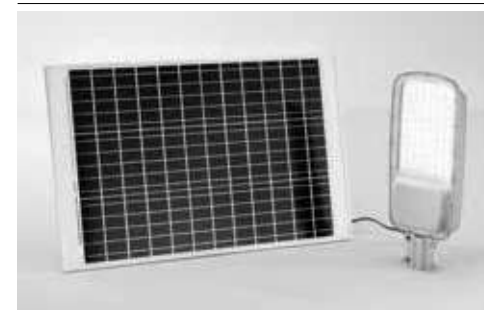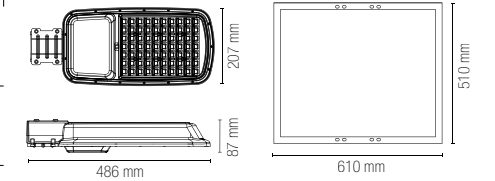

**LED-RADIUS-30C-SOLAR**

8031414917020

lumen 4200 lm

**LED-RADIUS-30M-SOLAR**

8031414917037


lumen 4200 lm

watt 64W  
beam angle 80° x 140°  
pf 0.90

colour temp. colour


4200 lm

4200 lm

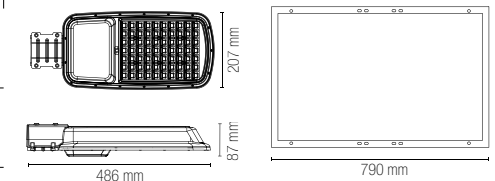

**Accessori inclusi / Included accessories**

Pannello solare /  
Solar panel



**50W - lithium 12,8V 54000 mAh**  
**75W - lithium 25,6V 36000 mAh**  
Batteria ricaricabile  
non sostituibile /  
Rechargeable battery  
non replaceable



imbocco palo 60 mm /  
60 mm pole entry

**Accessori non inclusi / Not included accessories**



**LED-RADIUS-REMOTE**  
8031414917068

Radiocomando /  
Remote control





**LED-RADIUS-ST**  
8031414917044

Staffa per montaggio su palo /  
Pole mounting bracket




**LED-RADIUS-ST-W**  
8031414917051

Staffa per montaggio su palo o a muro /  
Pole or wall mounting bracket




**Fotometria del prodotto / Photometric curve**

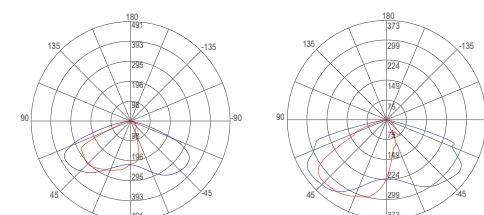

LED-RADIUS-15-SOLAR

LED-RADIUS-30-SOLAR

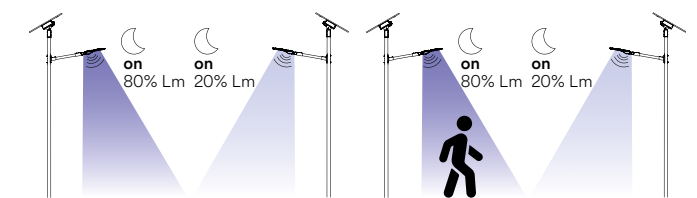

Sensore crepuscolare  
ON 80% luce  
Dopo 20 secondi 20% luce /  
Crepuscular sensor  
ON 80% light  
After 20 seconds 20% light

Sensore di movimento  
ON 80% luce  
Dopo 20 secondi 20% luce /  
Motion sensor  
ON 80% light  
After 20 seconds 20% light

# FEBO

Faro stradale LED in alluminio con pannello solare.  
Aluminum LED street light with solar panel.



**Materiale**  
alluminio

**Materiale pannello solare**  
celle in silicio  
monocristallino

**Colore**  
silver

**Temperatura colore**  
4000K

**Material**  
aluminum

**Solar panel material**  
monocrystalline  
silicon

**Colour**  
silver

**Colour temperature**  
4000K



technical information **FEBO**



Lenti in materiale autoestinguente,  
antiurto, anti-UV /  
Lens in anti-UV, self-extinguishing,  
shockproof material

**LED-FEBO-SOLAR**  
8031414879052  
lumen

colour temp. colour  
6800 lm

**Accessori inclusi /  
Included accessories**

Pannello solare /  
Solar panel




**Lithium 12,8V 30AH**

Batteria ricaricabile non sostituibile /  
Rechargeable battery non replaceable




imbocco palo 60 mm /  
60 mm pole entry

**Fotometria del prodotto /  
Photometric curve**



LED-FEBO-SOLAR

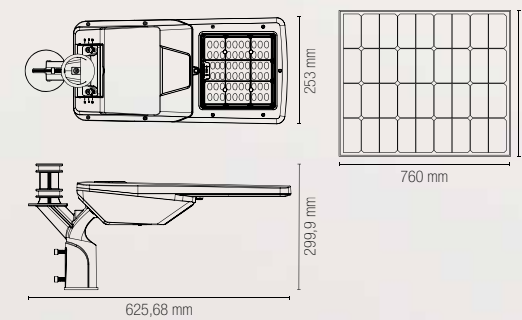

**Impostazioni di fabbrica / Default Settings**

flux	on <20lux				on				off +12h				
	T1	T2	T3	T4	T1	T2	T3	T4	T1	T2	T3	T4	
100%									T1	<20lux ÷ +2h			100%
60%									T2	T1 ÷ +2h			60%
50%									T3	T2 ÷ +7h			10%
10%									T4	T3 ÷ +2h			50%
													+12h off

# IPERION

Faro stradale LED in alluminio silver con pannello solare.  
Silver aluminum LED street light with solar panel.



**Materiale**  
alluminio

**Materiale pannello solare**

celle in silicio  
monocristallino

**Colore**  
silver

**Temperatura colore**

4000K

**Material**  
aluminum

**Solar panel material**




monocrystalline  
silicon

**Colour**  
silver


**Colour temperature**

4000K

	colour temp.
<b>LED-IPERION-50-SOLAR</b> 8031414879069	9000 lm
<b>LED-IPERION-75-SOLAR</b> 8031414879076	13500 lm
watt	50W
beam angle	156° x 71°

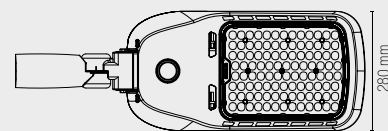

LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR



technical information **IPERION**



Lenti in materiale autoestinguente, antiurto, anti-UV / Lens in anti-UV, self-extinguishing, shockproof material

**Sensore microwave**  
max altezza 6m  
raggio 7m /  
**Microwave sensor**  
max height 6m  
radius 7m

**Accessorio non incluso / Not included accessory**

**LED-IPERION-REMOTE**  
8031414879083

Radiocomando multifunzione / Remote control multi-mode control

\*regolabile solo con radiocomando multifunzione LED-IPERION-REMOTE / \*adjustable only with LED-IPERION-REMOTE remote control



**Accessori inclusi / Included accessories**

Palo 60 cm / Pole 60 cm

Pannello solare / Solar panel


**50W - lithium 12,8V 54000 mAh**  
**75W - lithium 25,6V 36000 mAh**

Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

imbocco palo 60 mm / 60 mm pole entry




**Fotometria del prodotto / Photometric curve**



LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR

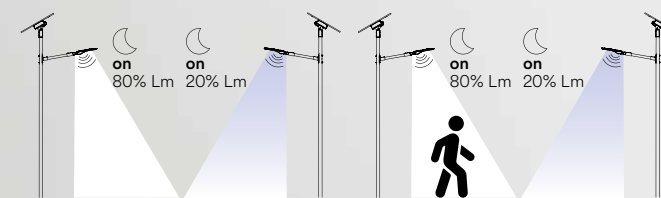

**Sensore crepuscolare**  
ON 80% luce  
Dopo 20 secondi 20% luce /  
Crepuscular sensor  
ON 80% light  
After 20 seconds 20% light

**Sensore di movimento**  
ON 80% luce  
Dopo 20 secondi 20% luce /  
Motion sensor  
ON 80% light  
After 20 seconds 20% light

# STREETWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.  
Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.



- Materiale**  
alluminio
- Colore**  
silver
- Temperatura colore**  
4000K
- Driver**  
incluso
- Durata e on/off**  
50.000 h  
>25.000 on/off
- Material**  
aluminum
- Colour**  
silver
- Colour temperature**  
4000K
- Driver**  
included
- Life time and on/off**  
50.000 h  
>25.000 on/off



technical information **STREETWAY**




### LED-STREETWAY-50

8031414876334  
lumen

colour temp.	colour
●	●
7800 lm	

watt	50W
beam angle	80° x 140°
pf	0.90




### LED-STREETWAY-100

8031414876341  
lumen

colour temp.	colour
●	●
15500 lm	

LED-STREETWAY-100FC	
8031414879113	lumen
15500 lm	
crepuscular sensor	on 6 lux off 50 lux

watt	100W
beam angle	80° x 140°
pf	0.90




### LED-STREETWAY-150

8031414876358  
lumen

colour temp.	colour
●	●
22000 lm	

watt	150W
beam angle	80° x 140°
pf	0.90




### LED-STREETWAY-200



8031414879106  
lumen

colour temp.	colour
●	●
29900 lm	

watt	200W
beam angle	80° x 140°
pf	0.90



#### Fotometria del prodotto / Photometric curve

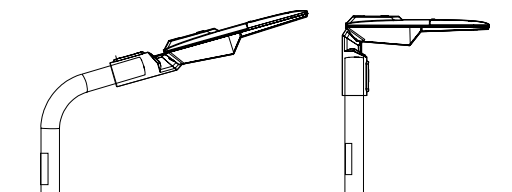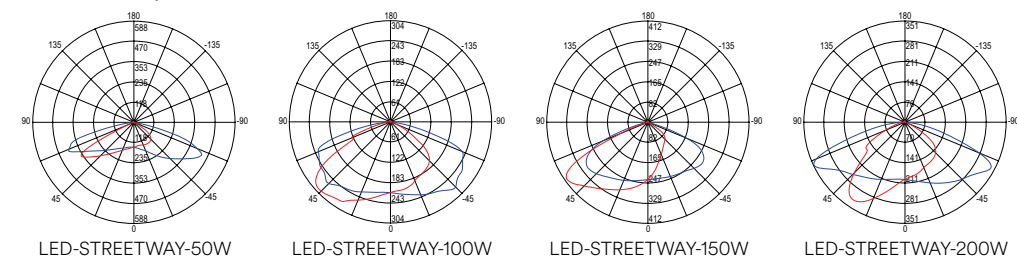

Doppio sistema di montaggio. Per palo Ø 60 mm / Double mounting system. Fit for Ø 60 mm pole



# HIGHWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.

Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.



**Materiale**  
alluminio

**Colore**  
antracite

**Temperatura colore**  
4000K

**Driver**  
incluso

**Durata e on/off**  
30.000 h  
>15.000 on/off

**Material**  
aluminum

**Colour**  
anthracite

**Colour temperature**  
4000K

**Driver**  
included

**Life time and on/off**  
30.000 h  
>15.000 on/off





technical information **HIGHWAY**



**LED-HIGHWAY-50**  
8031414877034  
lumen

colour temp. | colour  
● | ●  
7500 lm


watt 50W  
beam angle 135° x 80°  
pf 0.90

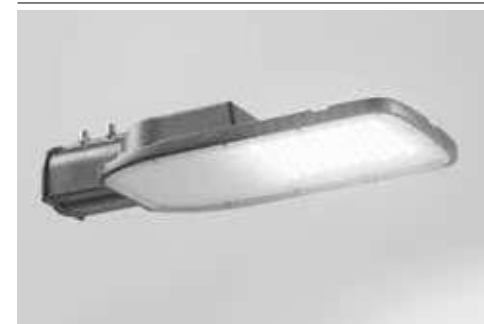

**LED-HIGHWAY-100**  
8031414877041  
lumen

colour temp. | colour  
● | ●  
14000 lm


watt 100W  
beam angle 135° x 80°  
pf 0.90



**LED-HIGHWAY-150**  
8031414877058  
lumen

colour temp. | colour  
● | ●  
20000 lm


watt 150W  
beam angle 135° x 80°  
pf 0.90




**LED-HIGHWAY-ADAT**  
8031414877904

Adattatore 90° armature stradali highway imbocco palo 60 mm / 90° adapter 60 mm pole entry for street light

imbocco palo 60 mm / 60 mm pole entry



Fotometria del prodotto / Photometric curve

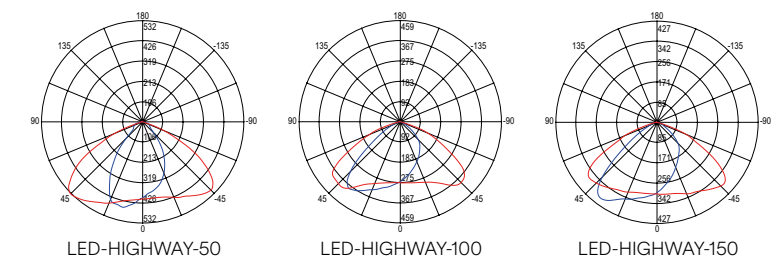

# POLIS

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato.

Built-in LED street light die-cast aluminum body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket.



**Materiale**  
alluminio pressofuso

**Colore**  
silver

**Temperatura colore**  
4000K

**Driver**  
incluso

**Durata e on/off**  
50.000 h  
>25.000 on/off

**Material**  
die-cust aluminum

**Colour**  
silver

**Colour temperature**  
4000K

**Driver**  
included

**Life time and on/off**  
50.000 h  
>25.000 on/off






technical information **POLIS**



**LED-POLIS-50**  
8031414879465  
lumen

colour temp.	colour
7000 lm	

watt	50W
beam angle	155° x 75°
pf	0.90




imbocco palo 60mm  
60mm pole entry




**LED-POLIS-S50**  
8031414879472  
lumen

colour temp.	colour
7000 lm	

watt	50W
beam angle	155° x 75°
pf	0.90




Fotometria del prodotto / Photometric curve

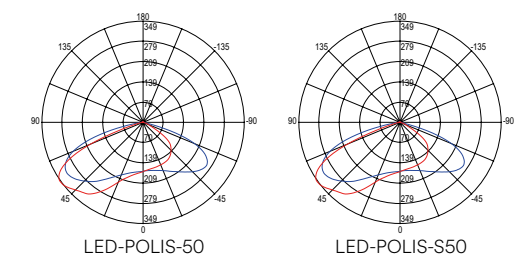

LED-POLIS-50

LED-POLIS-S50


INDUSTRIAL

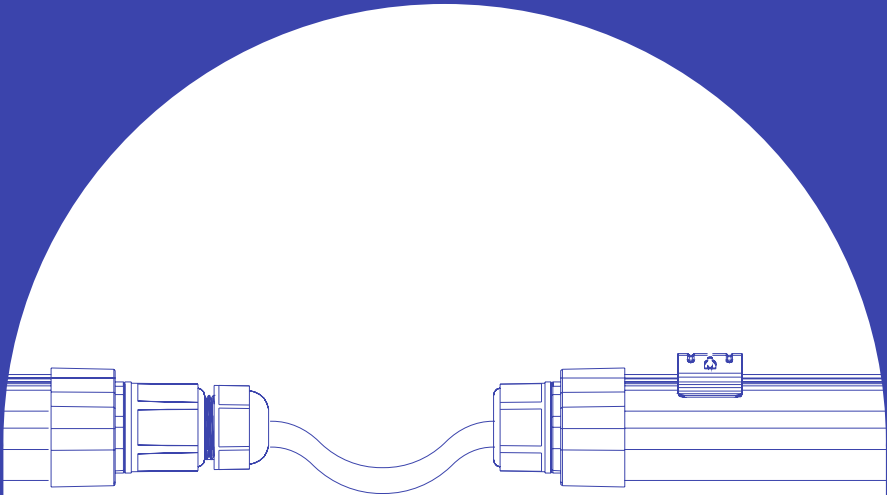

HIGH BAY & TRI-PROOF

# AVATAR

Lampada LED high bay in alluminio nero.  
Black aluminium high bay LED lamp.

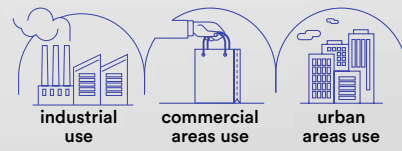

**Materiale**  
alluminio

**Colore**  
nero



**Temperatura colore**  
4000K



**Driver**  
incluso

**Durata e on/off**  
50.000 h  
>25.000 on/off

**Material**  
aluminum

**Colour**  
black



**Colour temperature**  
4000K




**Driver**  
included

**Life time and on/off**  
50.000 h  
>25.000 on/off



Fotometria del prodotto / Photometric curve

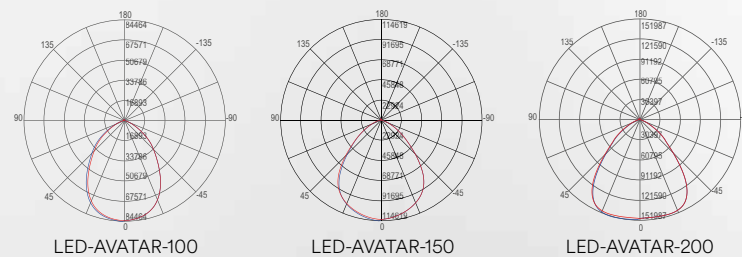

technical information **AVATAR**




**LED-AVATAR-100**  
8031414903733

lumen 15000 lm  
watt 100W  
beam angle 90°  
pf 0.90


colour temp.



Accessorio non incluso /  
Not included accessory



Connettore  
IP67 incluso /  
IP67 connector  
included



**LED-AVATAR-ST1015**  
8031414903771

Staffa per fissaggio a parete/soffitto  
AVATAR 100 e 150 /  
Bracket for wall/ceiling fixing  
AVATAR 100 and 150



**LED-AVATAR-150**  
8031414903740

lumen 22500 lm  
watt 150W  
beam angle 90°  
pf 0.90


colour temp.



Accessorio non incluso /  
Not included accessory



Connettore  
IP67 incluso /  
IP67 connector  
included




**LED-AVATAR-200**  
8031414903757

lumen 30000 lm  
watt 200W  
beam angle 90°  
pf 0.90


colour temp.



Accessorio non incluso /  
Not included accessory



Connettore  
IP67 incluso /  
IP67 connector  
included



**LED-AVATAR-ST200**  
8031414903795

Staffa per fissaggio a parete/soffitto  
AVATAR 200 /  
Bracket for wall/ceiling fixing  
AVATAR 200




**LED-AVATAR-DR-HELP**  
8031414903764

emergency light 15W  
Driver d'emergenza con staffa inclusa /  
Emergency driver with bracket included


**Li-FePO4 3000mAh-11.1V**  
Batteria per emergenza inclusa /  
Included emergency battery



Funzione MAINTAIN sempre accesa /  
MAINTAIN function always on




Funzione NON-MAINTAIN emergenza /  
NON-MAINTAIN function only emergency



# ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC.  
Waterproof lamp for double LED tube in PC+PC.

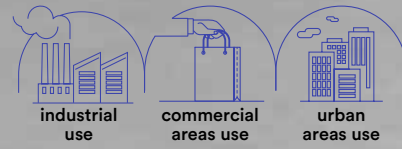


technical information ATLANTIC



**LED-ATLANTIC-ST-60**  
8031440355315

2 x T8 230V




Lampadina  
non inclusa /  
Light bulb  
not included




**LED-ATLANTIC-ST-120**  
8031440355322

2 x T8 230V



**LED-ATLANTIC-ST-150**  
8031440355292

2 x T8 230V



In.tec light HIGH BAY & TRI-PROOF

# NAUTILUS

Plafoniere stagno in policarbonato.  
Waterproof ceiling lamps in polycarbonate.



- Materiale**  
policarbonato
- Colore**  
silver
- Temperatura colore**  
4000K
- Driver**  
integrato
- Durata e on/off**  
50.000 h  
>25.000 on/off
- Material**  
policarbonato
- Colour**  
silver
- Colour temperature**  
4000K
- Driver**  
built-in
- Life time and on/off**  
50.000 h  
>25.000 on/off



Fotometria del prodotto / Photometric curve




technical information **NAUTILUS**




**LED-NAUTILUS-60**  
8031414876501  
lumen 2900 lm  
watt 21W  
beam angle 120°  
pf -

colour temp.	colour




**LED-NAUTILUS-120**  
8031414876518  
lumen 5400 lm  
watt 40W  
beam angle 120°  
pf 0.90

colour temp.	colour




**LED-NAUTILUS-150**  
8031414876525  
lumen 7500 lm  
watt 55W  
beam angle 120°  
pf 0.90

colour temp.	colour



**LED-NAUTILUS-PRO**  
8031414876532  
lumen 10600 lm  
watt 80W  
beam angle 120°  
pf 0.90

colour temp.	colour



**LED-NAUTILUS-120HP**  
8031414919512  
lumen 5400 lm  
emergency light 3 h - 4W - 560 lm   
watt 40W  
beam angle 120°  
pf 0.90


colour temp.	colour



**16 hours** LiFePo4 1500mAh, 3000mAh  
Batteria per emergenza inclusa / Included emergency battery




**NAUTILUS-SENS**  
8031414878758



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.




Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

# ARTIC

Plafoniera stagna LED integrato in policarbonato.  
Built-in LED TRI PROOF ceiling lamps in PC.

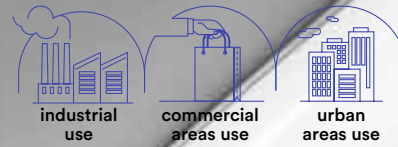

technical information **ARTIC**



**Materiale**  
policarbonato

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
integrato

**Durata e on/off**  
50.000 h  
>25.000 on/off


**Material**  
policarbonato

**Colour**  
white

**Colour temperature**  
4000K

**Driver**  
built-in

**Life time and on/off**  
50.000 h  
>25.000 on/off






**LED-ARTIC-30**  
8031414882625  
lumen

watt	9W
beam angle	120°
pf	-

colour temp.	colour
●	●

1200 lm






**LED-ARTIC-60**  
8031414882632  
lumen

watt	15W
beam angle	120°
pf	-

colour temp.	colour
●	●

1800 lm






**LED-ARTIC-120**  
8031414882601  
lumen

watt	30W
beam angle	120°
pf	0.90

colour temp.	colour
●	●

4000 lm





**LED-ARTIC-150**  
8031414882618  
lumen


watt	45W
beam angle	120°
pf	0.90

colour temp.	colour
●	●

5500 lm


Fotometria del prodotto / Photometric curve

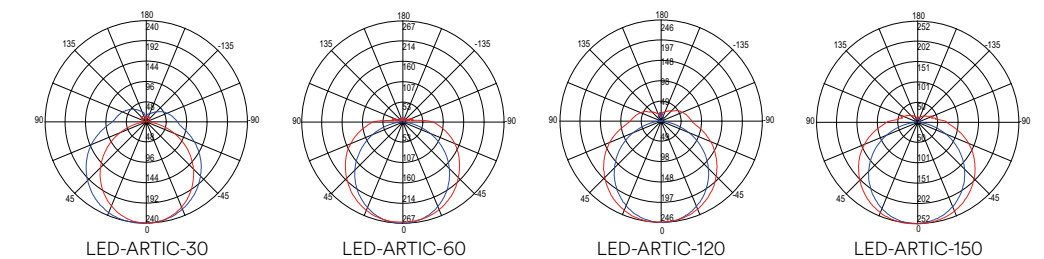

In.tec light HIGH BAY & TRI-PROOF

# OCEAN

Plafoniera stagna LED integrato in policarbonato.  
Built-in LED TRI PROOF ceiling lamps in PC.

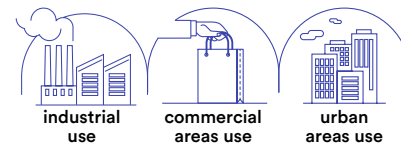

technical information **ARTIC**



**Materiale**  
policarbonato

**Colore**  
bianco

**Temperatura colore**  
4000K

**Driver**  
integrato

**Durata e on/off**  
30.000 h  
>15.000 on/off


**Material**  
polycarbonate

**Colour**  
white

**Colour temperature**  
4000K

**Driver**  
built-in


**Life time and on/off**  
30.000 h  
>15.000 on/off

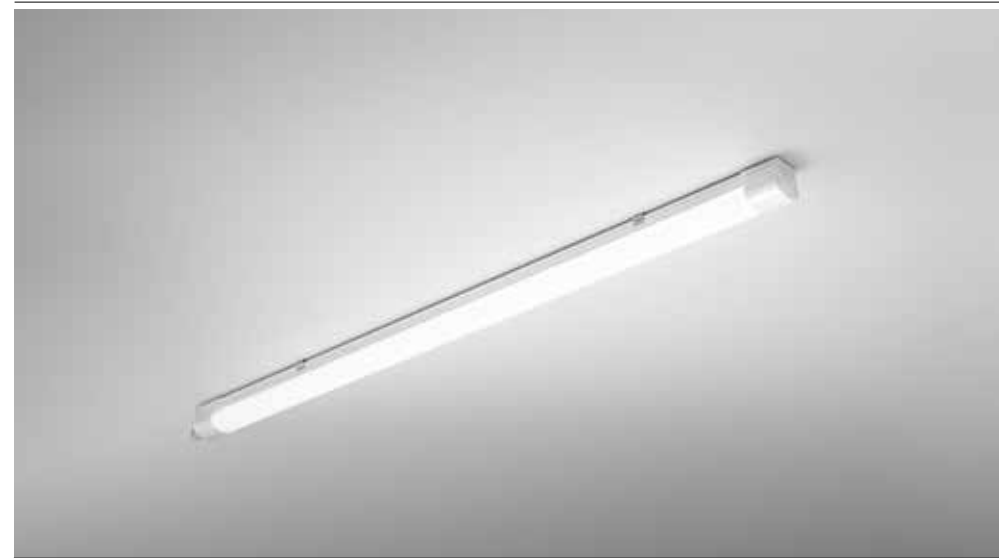

**LED-OCEAN-SENS**  
8031414868858  
lumen


colour temp.	colour
3240 lm	

watt	36W
beam angle	120°
pf	0.90



**Accessori inclusi / Included accessories** | crepuscular sensor | motion sensor


Sensore microonde di movimento /  
Microwave motion sensor

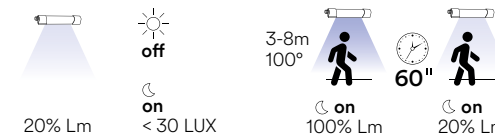

HIGH BAY & TRI-PROOF  
In.tec light




## DECORATIVE

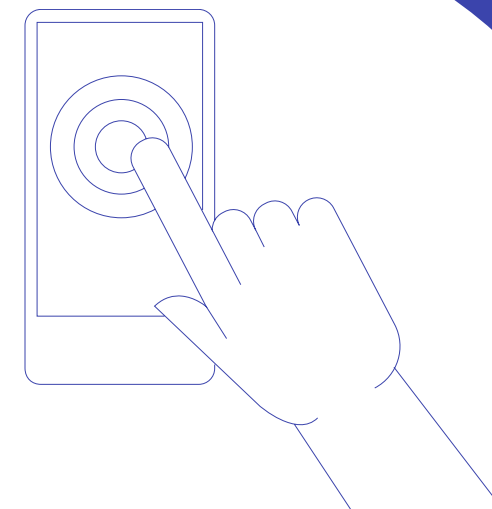

EASY DOMOTIC 24V

# EASY DOMOTICA 24V










Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo. Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Bluetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

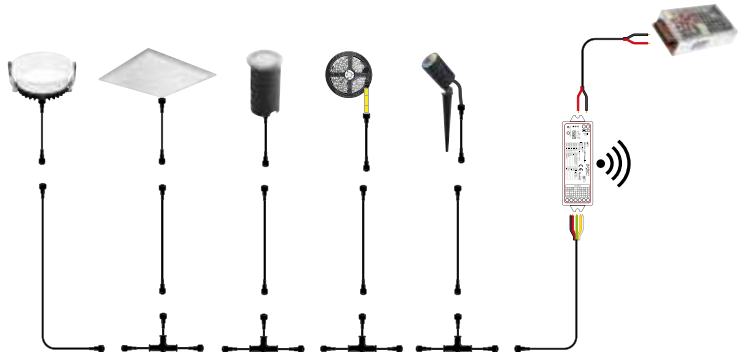
With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups 24V products (for example indoor or outdoor) that, thanks to easy connector accessories, can be connected each other for simultaneous control. Devices control becomes easy: constant voltage power supply in parallel connection system are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units and the control units can be controlled by wifi, bluetooth devices or via a wall pad or remote control.

	<p><b>CAVO-4CH-CONN-MF</b>  8031414878772 100 cm Cavo di connessione connettore M+F / 100 cm Connection cable M+F connector</p>	
	<p><b>CAVO-4CH-CONN-T</b>  8031414878789 40+20 cm Cavo di connessione a T connettore M+F+F / 40+20 cm T connection cable M+F+F connector</p>	
	<p><b>CAVO-4CH-CONN-M</b>  8031414878796 50 cm Cavo di connessione connettore M+cavi sciolti / 50 cm Connection cable M+cables</p>	

# XANTO-RF

**Incasto in alluminio pressofuso antiriflesso con cavo easy connection integrato.**  
Diecast aluminum anti-glare down-light with built-in easy domotic cable.

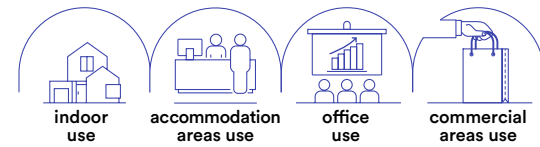

**Materiale**  
alluminio pressofuso

**Colore**  
bianco

**Temperatura colore**  
RGB + 4000K



**Driver**

DC 24V non incluso  
Tensione costante  
connessione  
in parallelo

**Durata e on/off**

25.000h  
>15.000 on/off

**Material**

die cast aluminum

**Colour**  
white

**Colour temperature**  
RGB + 4000K




**Driver**

DC 24V not included  
Costant voltage  
parallel connecting  
system

**Life time and on/off**

25.000 h  
>15.000 on/off




Driver p. 843-852  
Controller p. 854-857



**INC-XANTO-R120-24V**


8031414877942  
lumen



1120 lm


watt 12W  
beam angle 120°  
pf -

Ø 110 mm



**INC-XANTO-R220-24V**


8031414878697  
lumen




3000 lm

watt 30W  
beam angle 120°  
pf 0.90


Ø 200 mm



Fotometria del prodotto /  
Photometric curve




INC-XANTO-R120-24V



INC-XANTO-R220-24V

# PANEL

**Pannello LED con struttura in alluminio diffusore in acrilico con cavo easy connection integrato.**  
LED panel with aluminum structure and acrylic diffuser with built-in easy domotic cable.

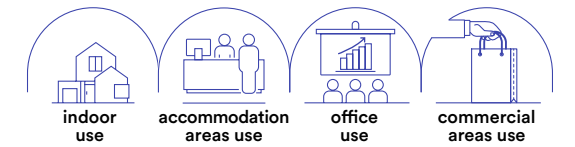

**Materiale**  
alluminio  
diffusore in acrilico

**Colore**  
bianco

**Temperatura colore**  
RGB + 4000K



**Driver**

DC24V  
tensione costante  
non incluso

**Durata e on/off**

20.000h  
>10.000 on/off

**Material**

aluminum  
acrylic diffuser

**Colour**  
white

**Colour temperature**  
RGB + 4000K



**Driver**

DC24V  
costant voltage  
not included

**Life time and on/off**

20.000h  
>10.000 on/off



Driver p. 843-852  
Controller p. 854-857



**LED-PANEL-60X60-24V**


8031414875313  
lumen




3280 lm

watt 30W  
beam angle 120°  
pf 0.90

590 × 590 mm




Fotometria del prodotto /  
Photometric curve



LED-PANEL-60X60-24V

# STRIP

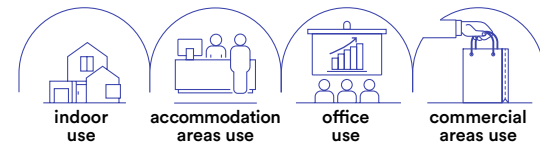


**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.




Driver p. 843-852  
Controller p. 854-857

**STRIP24V-5050-RGBW**  
8031414871384  
lumen

colour temp.  
5400 lm/m



STRIP24V-5050-RGBW  
5 m



**Materiale**  
kapton  
senza silicone

**Material**  
kapton  
without silicone

**Temperatura colore**  
RGB + 4000K



**Colour temperature**  
RGB + 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Driver**  
DC24V  
constant voltage  
not included

**Durata e on/off**  
50.000h  
>25.000 on/off

**Life time and on/off**  
50.000h  
>25.000 on/off


**Rotolo 5 metri strip led.**  
Roll 5 meters strip-led.




Driver p. 843-852  
Controller p. 854-857

**STRIP24V-5050RGBW-IP68**  
8031414871407  
lumen

colour temp.  
5400 lm/m



STRIP24V-5050RGBW-IP68  
5 m



**Materiale**  
kapton con  
rivestimento  
in silicone

**Material**  
kapton  
with silicone  
cover

**Temperatura colore**  
RGB + 4000K



**Colour temperature**  
RGB + 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Driver**  
DC24V  
constant voltage  
not included

**Durata e on/off**  
50.000h  
>25.000 on/off

**Life time and on/off**  
50.000h  
>25.000 on/off

# TARGET



**Faro proiettore in alluminio con picchetto  
incluso, cavo easy connection integrato.**  
Aluminum flood light with spike included,  
built-in easy domotic cable.

**Materiale**  
alluminio

**Colore**  
nero

**Temperatura colore**  
RGB + 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
30.000h  
>15.000 on/off

**Material**  
aluminum

**Colour**  
black

**Colour temperature**  
RGB + 4000K




**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
30.000h  
>15.000 on/off



Driver p. 843-852  
Controller p. 854-857



**LED-TARGET-8-24V**  
8031414878604  
lumen


colour temp.  
190 lm

**LED-TARGET-30-24V**  
8031414878550  
lumen


colour temp.  
468 lm

watt 8W  
beam angle 30°


watt 30W  
beam angle 30°




Fotometria del prodotto /  
Photometric curve



LED-TARGET-8-24V



LED-TARGET-30-24V



**Materiale**  
alluminio  
diffusore in vetro

**Colore**  
nero



**Temperatura colore**  
RGB + 4000K



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
20.000h  
>10.000 on/off

**Material**  
aluminum  
glass diffuser

**Colour**  
black



**Colour temperature**  
RGB + 4000K



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
20.000h  
>10.000 on/off


**Proiettore a led integrato in alluminio nero e diffusore trasparente.**  
Built-in LED aluminium flood lamp black finish with trasparent diffuser.




Driver p. 843-852  
Controller p. 854-857




**LED-AGILITY-36-24V**  
8031414915828  
lumen




watt 36W  
beam angle 120°




**LED-AGILITY-72-24V**  
8031414915835  
lumen




watt 72W  
beam angle 120°

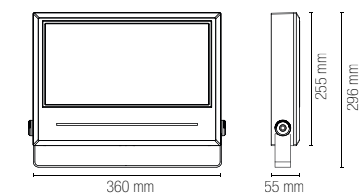


Fotometria del prodotto / Photometric curve



LED-AGILITY-36-24V



LED-AGILITY-72-24V



**Materiale**  
alluminio  
diffusore in vetro

**Colore**  
nero



**Temperatura colore**  
RGB



**Driver**  
DC24V  
tensione costante  
non incluso

**Durata e on/off**  
20.000h  
>10.000 on/off

**Material**  
aluminum  
glass diffuser

**Colour**  
black



**Colour temperature**  
RGB



**Driver**  
DC24V  
constant voltage  
not included

**Life time and on/off**  
20.000h  
>10.000 on/off

**Proiettore a led integrato in alluminio silver e diffusore trasparente.**  
Built-in LED aluminium flood lamp silver finish with trasparent diffuser.




Driver p. 843-852  
Controller p. 854-857



**LED-QUICK-36-24V**  
8031414915842  
lumen

colour temp.  
735 lm

watt 36W  
beam angle 120°




**LED-QUICK-72-24V**  
8031414915859  
lumen

colour temp.  
1800 lm

watt 72W  
beam angle 120°

Fotometria del prodotto / Photometric curve

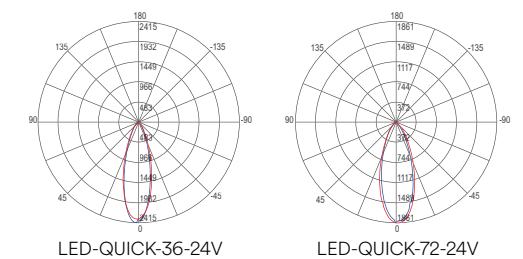

# SPRINT

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.

Inground and wall recessed light with built-in easy domotic cable.



**Materiale**  
alluminio

**Colore**  
acciaio

**Temperatura colore**  
RGB + 4000K



**Driver**  
DC 24V  
tensione costante  
non incluso

**Durata e on/off**  
25.000h  
>10.000 on/off

**Material**  
aluminum

**Colour**  
stainless steel

**Colour temperature**  
RGB + 4000K



**Driver**  
DC 24V  
costant voltage  
not included

**Life time and on/off**  
25.000h  
>10.000 on/off

EASY DOMOTICA 24V



**LED-SPRINT-R5-24V**  
8031414878543

lumen



colour temp.

60 lm

watt 1,5W  
beam angle 108°  
pressure loads max 100 kg  
Ø 42 mm




Ø 50 mm



Driver p. 843-852  
Controller p. 854-857

Fotometria del prodotto /  
Photometric curve



LED-SPRINT-R5-24V



# RUNNER

Segnapassi incasso a pavimento o parete con cavo easy connection integrato.

Inground and wall recessed light with built-in easy domotic cable.



**Materiale**  
alluminio

**Colore**  
nikel spazzolato

**Temperatura colore**  
RGB + 4000K



**Driver**  
DC 24V  
tensione costante  
non incluso

**Durata e on/off**  
30.000h  
>15.000 on/off

**Material**  
aluminum

**Colour**  
brushed nickel

**Colour temperature**  
RGB + 4000K



**Driver**  
DC 24V  
costant voltage  
not included

**Life time and on/off**  
30.000h  
>15.000 on/off




EASY DOMOTICA 24V



**LED-RUNNER-Q8-24V**

8031414878536

lumen



colour temp.

1020 lm

watt 10W  
beam angle 30°  
pressure loads max 100 kg  
Ø 63 mm



Ø 62 mm

75x75 mm

120 mm

Ø 55 mm


85 mm



**LED-RUNNER-R8-24V**

8031414878567

lumen



colour temp.

1020 lm

watt 10W  
beam angle 30°  
pressure loads max 100 kg  
Ø 63 mm




Ø 78 mm

85 mm

Ø 55 mm


85 mm

Fotometria del prodotto /  
Photometric curve



LED-RUNNER-Q8-24V  
LED-RUNNER-R8-24V


## DECORATIVE

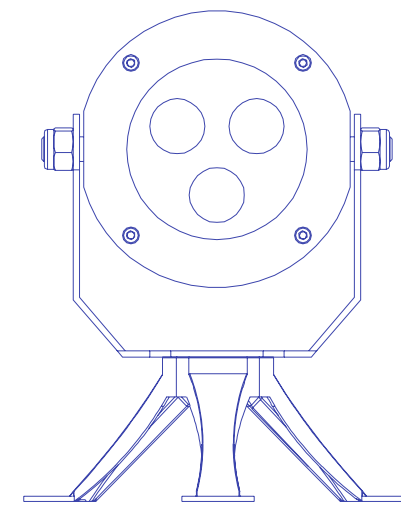

LUCI DECORATIVE TECNICHE DMX  
DMX TECHNICAL DECORATION LIGHTING



# SHOW WALLWASHER



technical information **SHOW WALLWASHER**




- Materiale**  
alluminio
- Temperatura colore**  
RGBW + UV
- Driver**  
integrato
- Durata e on/off**  
50.000h  
>25.000 on/off
- Material**  
aluminum
- Colour temperature**  
RGBW + UV
- Driver**  
built-in
- Life time and on/off**  
50.000h  
>25.000 on/off

**Proiettore LED RGB full color in alluminio e wallwasher a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, per emettere una vasta gamma di colori mixando sei colori principali: rosso, verde, blu, bianco, ambra e ultravioletto.**  
Full color RGB LED projector made of aluminum and rechargeable battery-powered wallwasher with 9 RGBW+UV LEDs and built-in DMX 512 receiver to emit a wide range of colors by mixing six main colors: red, green, blue, white, amber and ultraviolet.



<b>LED-SHOW-WW9</b> 8031414915446	colour temp. 	colour 
lumen	RGBW+UV	
watt	9 x 18W	
beam angle	45°	



Tempo di ricarica / Charging time	Ricarica completa in 5 ore / Full recharge in 5 hours
Durata accensione / Ignition duration	RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours
Modalità auto / Auto mode	7 ore monocromatico più di 20 ore / 7 hours monochrome more than 20 hours
Modalità canali / Channel mode	6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations
Modalità automatiche tramite tasto / Automatic modes via push-button	Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change
Control mode	DMX512, master/slave, auto, sound active/ Wireless DMX, WIFI mobile phone APP control

**Accessori inclusi / Included accessories**

- Accessori Wi-Fi / Wi-Fi accessories
- 5 hours** 13200 mAh  
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable

**Control system easy installation**

- Smart WIFI**
- ALEXA e GOOGLE HOME voice control**

LUCI DECORATIVE TECNICHE DMX / DMX TECHNICAL DECORATION LIGHTING

In.tec light



**Materiale**  
alluminio

**Temperatura colore**  
RGBW + UV



**Driver**  
integrato

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
aluminum

**Colour temperature**  
RGBW + UV



**Driver**  
built-in

**Life time and on/off**  
50.000h  
>25.000 on/off


**Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mixando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, permettendo di creare ogni colore desiderato.**

Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing you to create any color you want.



	colour temp.	colour
<b>LED-SHOW-PAR9</b> 8031414915439 lumen		
	RGBW+UV	

watt	9 x 18W
beam angle	45°



Tempo di ricarica /  
Charging time

Durata accensione /  
Ignition duration

Modalità auto /  
Auto mode

Modalità canali /  
Channel mode

Modalità automatiche  
tramite tasto /  
Automatic modes  
via push-button

Control mode

Ricarica completa in 5 ore /  
Full recharge in 5 hours

RGBW+UV con la luminosità al massimo 3 ore /  
RGBW+UV with maximum brightness 3 hours

7 ore monocromatico più di 20 ore /  
7 hours monochrome more than 20 hours

6/11 DMX channel - 16.7 milioni di combinazioni colori /  
6/11 DMX channels - 16.7 million color combinations

Cambio colore colore stroboscopico, dimmerazione colore  
cambio colore graduale, cambio colori a step /  
Color change, strobe color, color dimming,  
gradual color change, step color change

DMX512, master/slave, auto, sound active/ Wireless DMX,  
WiFi mobile phone APP control

**Accessori inclusi / Included accessories**



Accessori Wi-Fi /  
Wi-Fi accessories



**13200 mAh**  
Batteria ricaricabile, non sostituibile /  
Rechargeable battery, non replaceable



**Control system easy installation**



Smart  
WIFI



ALEXA e  
GOOGLE HOME  
voice control

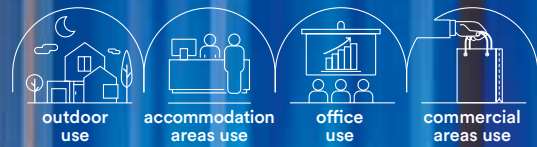

**Materiale**  
alluminio

**Temperatura colore**  
RGBW + UV



**Driver**  
integrato

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
aluminum

**Colour temperature**  
RGBW + UV




**Driver**  
built-in


**Life time and on/off**  
50.000h  
>25.000 on/off

**Faro LED a batteria ricaricabile con 6 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, consentendo la creazione di ogni colore desiderato.**

Rechargeable battery-operated LED spotlight with 6 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color.

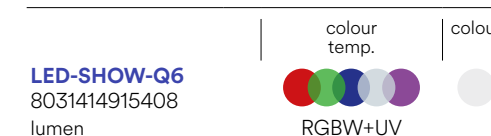

watt 6 x 18W  
beam angle 45°



Tempo di ricarica / Charging time

Durata accensione / Ignition duration

Modalità auto / Auto mode

Modalità canali / Channel mode

Modalità automatiche tramite tasto / Automatic modes via push-button

Control mode

Ricarica completa in 5 ore / Full recharge in 5 hours

RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours

7 ore monocromatico più di 20 ore / 7 hours monochrome more than 20 hours

6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations

Cambio colore colore stroboscopico, dimmerazione colore cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change

DMX512, master/slave, auto, sound active/ Wireless DMX, WIFI mobile phone APP control

**Chap. 15 Bornes d'EXTÉRIEUR (POLLY)**

Accessoire de suspension avec câble en caoutchouc et connecteur / Accessoire de fixation au piquet avec connecteur et serre-câble / Accessoire de fixation au piquet avec câble en caoutchouc et prise schuko /

**Chap. 23 (SHOW Q)**

Valise pour 10 pièces /

**Accessorio non incluso / Not included accessory**



**LED-SHOW-CASE**  
8031414915415

Valigia per 10 pezzi / Case for 10 pcs

**Accessori inclusi / Included accessories**



Accessori Wi-Fi / Wi-Fi accessories



**9600 mAh**  
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable


**Control system easy installation**



Smart WIFI





ALEXA e GOOGLE HOME voice control

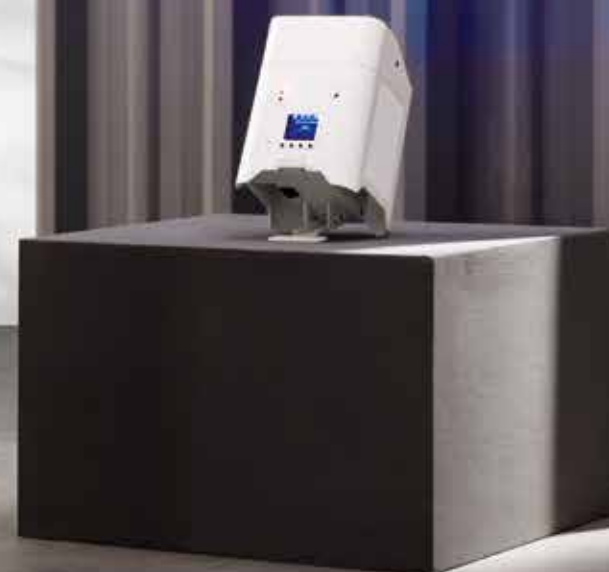

# SHOW TUBE

Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, permettendo la creazione di qualsiasi colore desiderato, dalle tonalità calde a quelle fredde.

Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color from warm to cool tones.

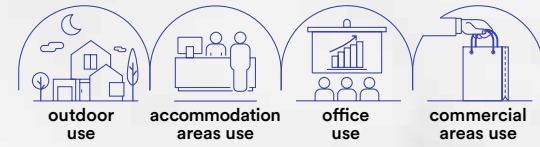

technical information **SHOW TUBE**



- Materiale**  
alluminio

---

- Temperatura colore**  
RGBW + UV
- 

---

- Driver**  
integrato

---

- Durata e on/off**  
50.000h  
>25.000 on/off

---

- Material**  
aluminum

---


- Colour temperature**  
RGBW + UV
- 

---


- Driver**  
built-in

---

- Life time and on/off**  
50.000h  
>25.000 on/off



**LED-SHOW-TUBE**  
8031414915422  
lumen



watt 8 x 28W  
beam angle 360°

Tempo di ricarica / Charging time	Ricarica completa in 5 ore / Full recharge in 5 hours
Durata accensione / Ignition duration	RGBW+UV con la luminosità al massimo 3 ore / RGBW+UV with maximum brightness 3 hours
Modalità auto / Auto mode	7 ore monocromatico più di 20 ore / 7 hours monochrome more than 20 hours
Modalità canali / Channel mode	6/11 DMX channel - 16.7 milioni di combinazioni colori / 6/11 DMX channels - 16.7 million color combinations
Modalità automatiche tramite tasto / Automatic modes via push-button	Cambio colore graduale, cambio colori a step / Color change, strobe color, color dimming, gradual color change, step color change
Control mode	DMX512, master/slave, auto, sound active/ Wireless DMX, WiFi mobile phone APP control



**Accessori inclusi / Included accessories**



**5 hours**  
**10000 mAh**  
Batteria ricaricabile, non sostituibile / Rechargeable battery, non replaceable

**Control system easy installation**



**Smart WIFI**  
**ALEXA e GOOGLE HOME**  
voice control



**Proiettore LED RGB FULL COLOR in alluminio.**  
LED RGB FULL COLOR lamp in aluminium.



**Materiale**  
alluminio

**Temperatura colore**  
RGB full color



**Driver**  
incluso

**Durata e on/off**  
50.000h  
>25.000 on/off


**Material**  
aluminum

**Colour temperature**  
RGB full color



**Driver**  
included



**Life time and on/off**  
50.000h  
>25.000 on/off



**LED-RAYS-36P**  
8031440355445  
lumen  
watt  
beam angle

colour temp. | colour  
RGB


30 x 1W  
45°

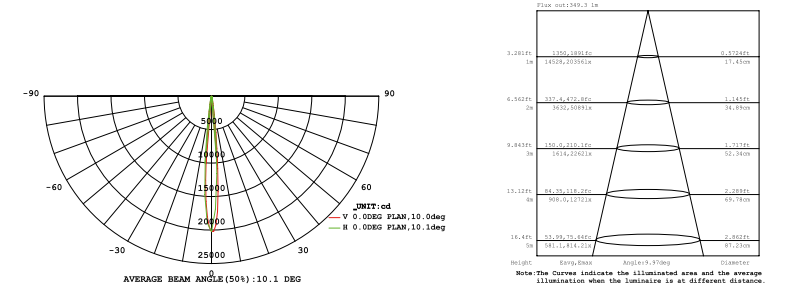

**LED-RAYS-72P**  
8031440358040  
lumen  
watt  
beam angle


colour temp. | colour  
RGB

72 x 2W  
45°

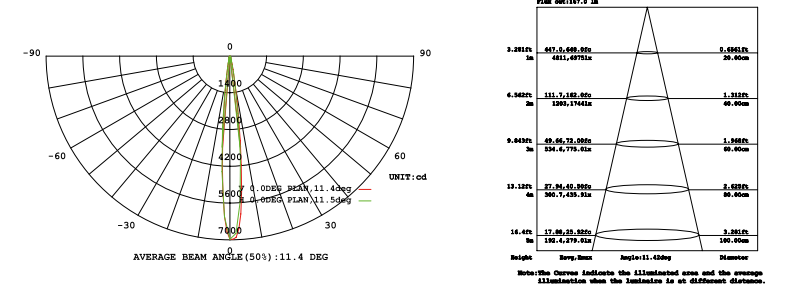

# WALLWASHER

Proiettore LED RGB FULL COLOR in alluminio.  
LED RGB FULL COLOR lamp in aluminium.



technical information WALLWASHER



**Materiale**  
alluminio

**Temperatura colore**  
RGB full color



**Driver**  
integrato

**Durata e on/off**  
50.000h  
>25.000 on/off


**Material**  
aluminum

**Colour temperature**  
RGB full color



**Driver**  
built-in



**Life time and on/off**  
50.000h  
>25.000 on/off

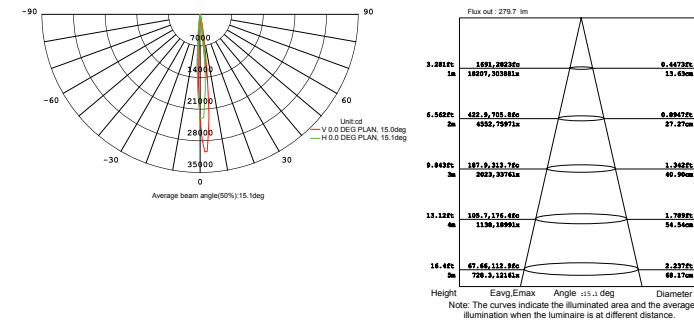

**LED-WALLWASHER-18**  
8031440359559  
lumen

colour temp. | colour  
RGB | RGB


watt 18 x 2W  
beam angle 45°

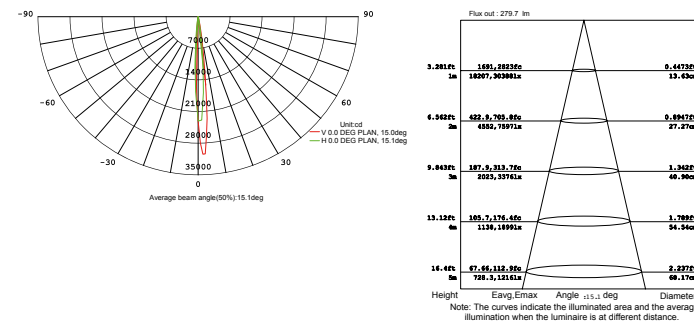

**LED-WALLWASHER-36**  
8031440359528  
lumen

colour temp. | colour  
RGB | RGB

watt 36 x 2W  
beam angle 45°



LUCI DECORATIVE TECNICHE DMX / DMX TECHNICAL DECORATION LIGHTING

In.tec light



**Proiettore LED monocolor  
o RGB FULL COLOR in alluminio.**  
LED single colour or RGB FULL  
COLOR lamp in aluminium.



**Materiale**  
alluminio

**Temperatura colore**  
RGB full color + 6000K



**Driver**  
DC 12/24V  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
aluminum

**Colour temperature**  
RGB full color + 6000K



**Driver**  
DC 12/24V  
not included





**Life time and on/off**  
50.000h  
>25.000 on/off



**LED-IRIDE-3P**  
8031440358101  
lumen

colour temp. colour  
RGB





watt 3 x 1W  
driver DC12/24V  
beam angle 45°

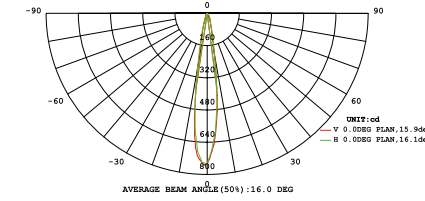

**LED-IRIDE-9P**  
8031440358118  
lumen

colour temp. colour  
RGB




watt 9 x 1W  
driver DC12/24V  
beam angle 40°

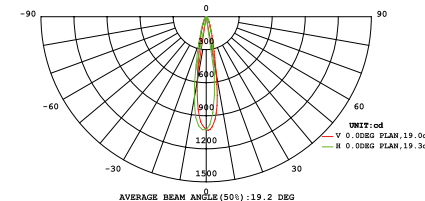


**LED-IRIDE-18P**  
8031440358088  
lumen

colour temp. colour  
RGB

watt 18 x 1W  
driver DC24V  
beam angle 40°

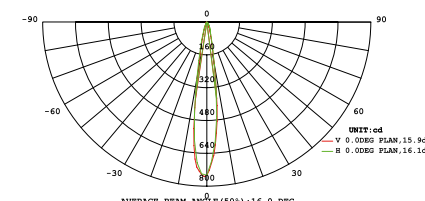

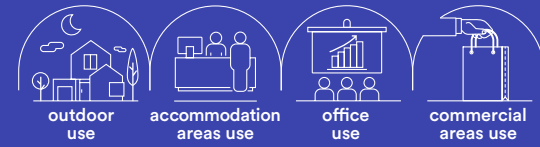

technical information **IRIDE**



**Incassi calpestabili LED RGB FULL COLOR**  
**corpo in lega di alluminio, ghiera in acciaio 316.**  
 Walkable built-in LED RGB FULL COLOR light 316  
 stainless steel cover and aluminium alloy housing.



**Materiale**  
alluminio pressofuso

**Temperatura colore**  
RGB full color



**Driver**  
DC 12/24V  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
die cast aluminum

**Colour temperature**  
RGB full color



**Driver**  
DC 12/24V  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off






**LED-IRIDE-R6**  
8031414868971  
lumen

colour temp. | colour | recessed box



watt 3 x 1W  
driver DC12/24V  
beam angle 15°



Beam angle	Height	Beam diameter	Beam diameter	Beam diameter
3.000°	32.34, 31.500m	1.177m	26.65m	26.65m
4.500°	21.56, 21.125m	0.800m	19.00m	19.00m
6.000°	16.20, 15.750m	0.600m	14.25m	14.25m
7.500°	12.80, 12.500m	0.450m	10.50m	10.50m
9.000°	10.33, 10.000m	0.360m	8.40m	8.40m
10.500°	8.53, 8.333m	0.300m	7.00m	7.00m
12.000°	7.29, 7.290m	0.270m	6.30m	6.30m
13.500°	6.40, 6.400m	0.240m	5.60m	5.60m
15.000°	5.71, 5.710m	0.210m	5.00m	5.00m






**LED-IRIDE-R12**  
8031414868988  
lumen

colour temp. | colour | recessed box



watt 9 x 1W  
driver DC12/24V  
beam angle 15°



Beam angle	Height	Beam diameter	Beam diameter	Beam diameter
3.000°	166.9, 161.667m	0.600m	38.50m	38.50m
4.500°	111.29, 107.143m	0.450m	28.88m	28.88m
6.000°	85.47, 82.333m	0.360m	22.30m	22.30m
7.500°	68.38, 66.667m	0.300m	18.75m	18.75m
9.000°	57.82, 57.820m	0.270m	16.50m	16.50m
10.500°	49.78, 49.780m	0.240m	14.50m	14.50m
12.000°	43.50, 43.500m	0.210m	12.75m	12.75m
13.500°	38.57, 38.570m	0.180m	11.25m	11.25m
15.000°	34.50, 34.500m	0.150m	9.75m	9.75m






**LED-IRIDE-R14**  
8031414868995  
lumen

colour temp. | colour | recessed box




watt 18 x 1W  
driver DC12/24V  
beam angle 15°




Beam angle	Height	Beam diameter	Beam diameter	Beam diameter
3.000°	274.1, 265.500m	0.750m	47.50m	47.50m
4.500°	182.73, 177.667m	0.563m	35.63m	35.63m
6.000°	137.06, 133.500m	0.422m	26.72m	26.72m
7.500°	110.40, 108.000m	0.338m	21.38m	21.38m
9.000°	92.00, 92.000m	0.280m	17.50m	17.50m
10.500°	78.57, 78.570m	0.240m	15.00m	15.00m
12.000°	68.33, 68.330m	0.210m	13.13m	13.13m
13.500°	60.00, 60.000m	0.180m	11.50m	11.50m
15.000°	53.00, 53.000m	0.150m	10.00m	10.00m



# NEPTUNE

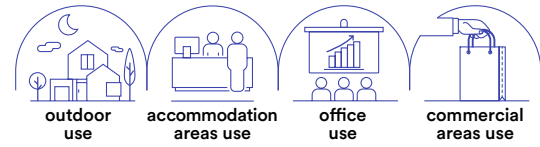

# CROWN

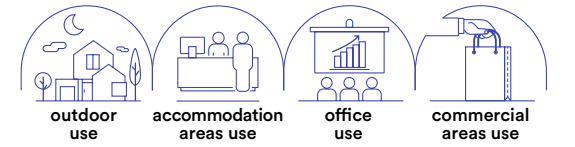

**Materiale**  
acciaio inox 316

**Colore**  
silver  
nero



**Temperatura colore**  
RGB full color



**Driver**  
DC24V  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
316 stainless steel

**Colour**  
black  
silver




**Colour temperature**  
RGB full color




**Driver**  
DC24V  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off




**Proiettori per fontane LED RGB FULL COLOR.**  
LED RGB FULL COLOR fountain flood lamp.




**LED-NEPTUNE-3P**  
8031414869008  
lumen







watt  $3 \times 3W$   
beam angle  $25^\circ$

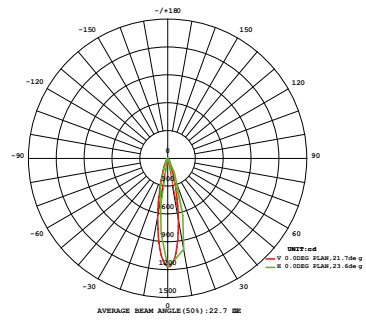

**LED-NEPTUNE-36P**  
8031440358057  
lumen



watt  $36 \times 1W$   
beam angle  $45^\circ$

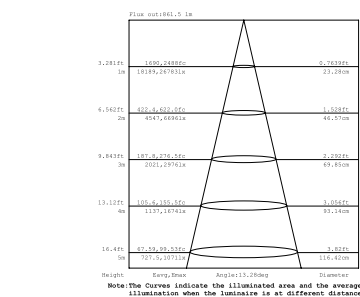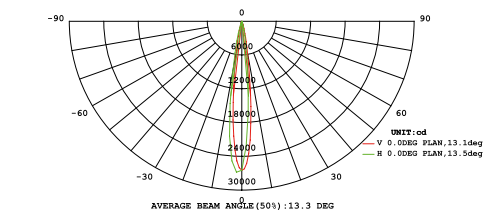

**Materiale**  
acciaio inox 316

**Temperatura colore**  
RGB full color



**Driver**  
DC24V  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
316 stainless steel

**Colour temperature**  
RGB full color




**Driver**  
DC24V  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off




**Incasso per fontane LED RGB FULL COLOR.**  
LED RGB FULL COLOR fountain recess lamp.



**LED-CROWN-R14**  
8031414869015  
lumen



watt  $9 \times 2W$   
beam angle  $25^\circ$

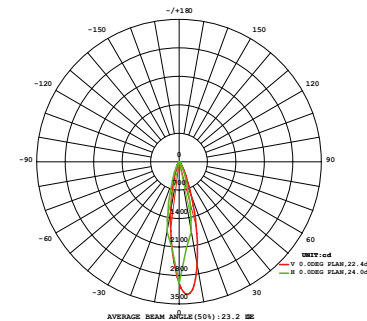



**Incasso immersione LED RGB FULL COLOR.**  
Immersion recessed light LED RGB FULL COLOR.



**Materiale**  
acciaio inox 316

**Temperatura colore**  
RGB full color

**Driver**  
DC 24V  
non incluso

**Durata e on/off**  
50.000h  
>25.000 on/off

**Material**  
316 stainless steel

**Colour temperature**  
RGB full color

**Driver**  
DC 24V  
not included

**Life time and on/off**  
50.000h  
>25.000 on/off







**LED-TREVIS-R7**  
8031414869022

colour temp. colour recessed box



lumen  
watt 3W  
beam angle 25°

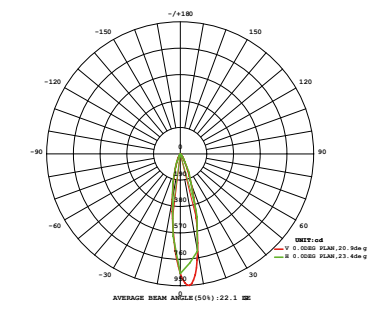




**LED-TREVIS-R11**  
8031414869039


colour temp. colour recessed box



lumen  
watt 9W  
beam angle 25°

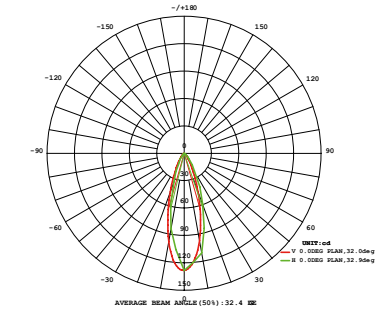

# PAR56

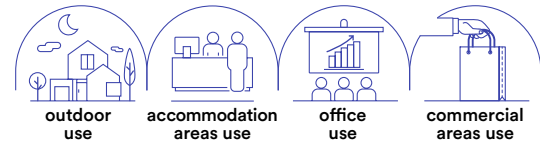

**Materiale**  
policarbonato

**Temperatura colore**  
RGB full color + 6500K



**Driver**

AC 12V non incluso  
DC 24V non incluso

**Durata e on/off**

50.000h  
>25.000 on/off

**Material**

PC

**Colour temperature**  
RGB full color + 6500K



**Driver**

AC 12V not included  
DC 24V not included

**Life time and on/off**

50.000h  
>25.000 on/off


**Incasso LED a immersione per piscine.**  
Pool immersion LED down light.



**LED-PAR56-24V-RGB**

8031414879755

lumen



watt

21W

driver

DC24V

beam angle

45°

1 m cable included

**LED-PAR56-BCO**

8031440359504

lumen



1050 lm

watt

21W

driver

12V AC

beam angle

45°





**INC-POOL-PAR56**

8031440359511

Struttura incasso per PAR 56  
per piscine in cemento /  
Recessed structure for  
PAR56 for concrete swimming pool

1 m cable included

Ø 260 mm

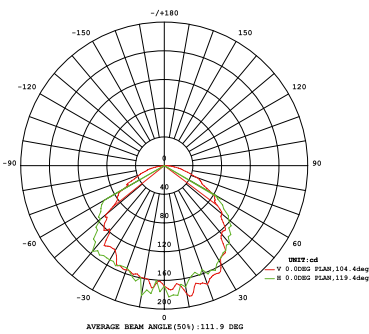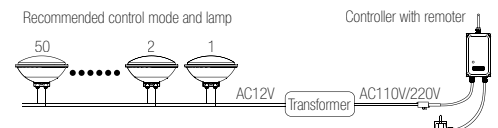




# CONTROLLER



## CONTROLLER-POOL 8031440359481

Controller 240V  
AC MAX 5A/1100W  
IP65 distanza max 30M

Controller 240V  
AC max 5A/1100W  
IP65 max distance 30M

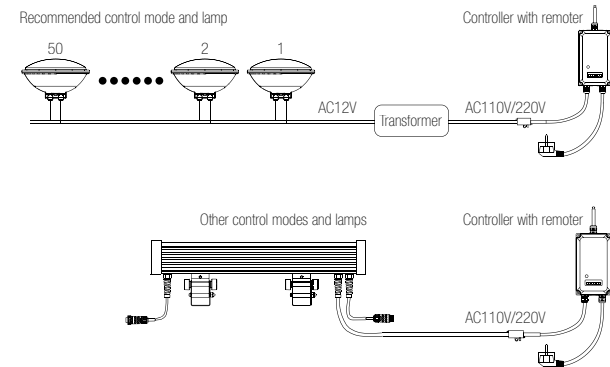


# CONTROLLER



## CONTROLLER-CTR-RGB 8031440358026

Centralina di comando  
C/PORTA DMX512 LED RGB  
Input 230V AC  
Output DC (12V 144W - 24V 300W)  
6 porte da 3 canali RGB



Control box with DMX512  
Port for LED RGB  
Input 230V AC  
Output DC (12V 144W - 24V 300W)  
6 ports 3 RGB channels



## CONTROLLER-CTR-RGB12 8031440355438

Centralina di comando  
C/PORTA DMX512 LED RGB  
Input 230V AC  
Output DC (12V 300W)  
6 porte da 3 canali RGB

Control box with DMX512  
Port for LED RGB  
Input 230V AC  
Output DC 12V 300W  
6 ports 3 RGB channels

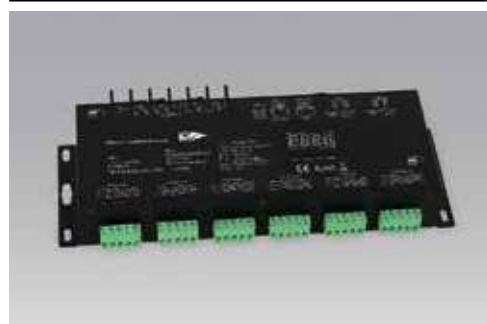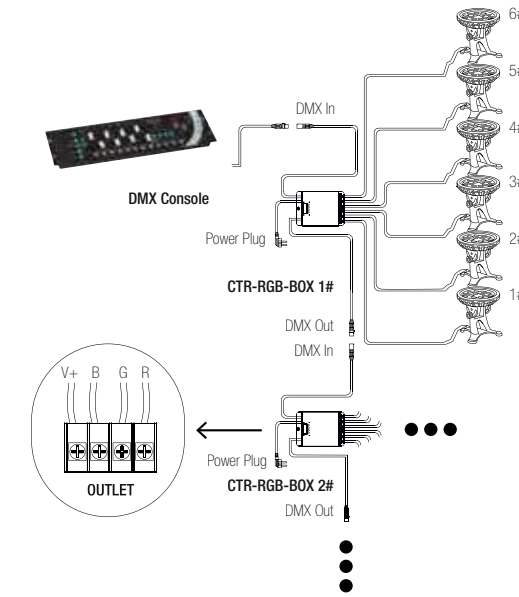

## CONTROLLER-DMX-24 8031414872718

Controller DMX 24 canali  
Tensione costante 4A  
Input VOLTAGE 12/24V DC  
Output POWER 24X(48-96)W  
Output CURRENT 24X4A

Controller DMX 24 channels  
Constant voltage 4A  
Input VOLTAGE 12/24V DC  
Output POWER 24X(48-96)W  
Output CURRENT 24X4A

264,5 × 83 × 42 mm



## SPLITTER-DMX-4 8031440359542

SPLITTER DMX  
6W XLR-3X4PCS XLR-5X4PCS


DMX SPLITTER  
6W XLR-3X4PCS XLR-5X4PCS



## CONTROLLER-PRO-3 8031440358033

Controller Master 3 canali  
per uso proiettori  
in modalità EASY  
IN 230V OUT DMX/XLR-3  
2 canali IP20



Controller Master 3 channels  
for flood in EASY MODE  
IN 230V OUT DMX/XLR-3  
2 channels IP20



## CONTROLLER-PRO-2 8031440358002

Controller DMX LED  
3 canali RGB SEGNALE OUTPUT  
DMX/XLR-3 (due uscite)  
IP20 con cavo di ricarica


Controller DMX LED  
3 channels RGB OUTPUT SIGNAL  
DMX/XLR-3 (two port)  
IP20 with charge cable

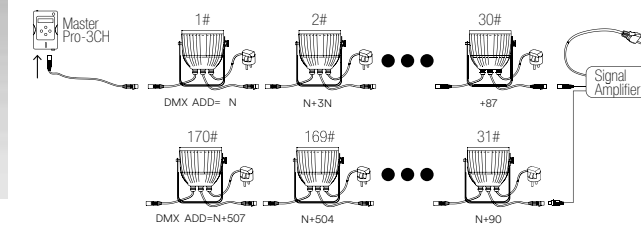

## CONTROLLER



**LED-SUNLITE-DE3**  
8031440359498  
SUNLITE 2X512 DMX ESA PRO/SUITE 2




## CONTROLLER



**LED-SUNLITE-U9**  
8031440359467

SUNLITE Controller  
256 canali Input  
(218 steps max)


SUNLITE Controller  
256 channels Input  
(218 steps max)



**LED-SUNLITE-GU2**  
8031422251093






















SUNLITE DMX STICK-GU2  
128 canali Input 240V

SUNLITE DMX STICK-GU2  
128 channels Input 240V



COMPONENTISTICA  
LIGHTING COMPONENTS

Accessori / Accessories

	<b>TRASFORMATORE-120</b> 8031440355094		
	Trasformatore di tensione 120W Input 240V AC Output 12V AC IP44 10A	Voltage power supply 120W Input 240V AC Output 12V AC IP44 10A	180 x 134 x 63 mm
	<b>LED-IRIDE-CAVO-2M-2P</b> 8031440355452		
	Cavo 2 poli per faro IRIDE bianco alluminio	Cable 2 poles for IRIDE white headlight aluminium	2 metri / 2 meters
	<b>LED-IRIDE-CAVO-2M</b> 8031440358095		
	Cavo RGB 4 poli per faro IRIDE RGB bianco alluminio	RGB cable 4 poles for IRIDE RGB white headlight aluminium	2 metri / 2 meters
	<b>CONNETTORE-M</b> 8031440355469		
	Connettore maschio per DMX	Male connector for DMX	
	<b>CONNETTORE-F</b> 8031440355476		
	Connettore femmina per DMX	Female connector for DMX	
	<b>CONNECTBOX-IP68-3</b> 8031440358903		
	Scatola connessione a tre poli	Connection box with three poles	35 x 115 x 71 mm
	<b>CONNECTBOX-IP68-2</b> 8031440358927		
	Scatola connessione a due poli	Connection box with two poles	30 x 115 x 41 mm
	<b>GUAINA</b> 8031440355483		
	Guaina isolante	Insulating sheath	
	<b>CONNETTORE-IP20</b> 8031414897681		
	Connettore IP20 2L+2N	IP20 2L+2N Connector	
	<b>CONNETTORE-IP65</b> 8031414897698		
	Connettore IP65	IP65 Connector	
	<b>CONNETTORE-IP68</b> 8031414897704		
	Connettore IP68	IP68 Connector	

DRIVER

Driver MINI and LT

	<b>I-DRIVER/4W</b> 8031414862801		
	MINI Driver corrente costante Output 2-12V 350mA 4W Input 100 ~ 240V	MINI constant current driver Output 2-12V 350mA 4W Input 100 ~ 240V	38 x 27 x 21 mm
	<b>I-DRIVER/4W-24V</b> 8031414871797		
	MINI Driver corrente costante Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	MINI constant voltage driver Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	38 x 27 x 21 mm
	<b>I-DRIVER-LT-75-24</b> 8031414876822		
	LT Driver tensione costante Output 24VDC 3.12A 75W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 3.12A 75W Input 220 ~ 240V AC	305 x 30 x 17 mm
	<b>I-DRIVER-LT-150-24</b> 8031414876846		
	LT Driver tensione costante Output 24V DC 6.25A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 24V DC 6.25A 150W Input 220 ~ 240V AC	336 x 30 x 17 mm
	<b>I-DRIVER-LT-30-24</b> 8031414896196		
	LT Driver tensione costante Output 24VDC 1.25A 30W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 1.25A 30W Input 220 ~ 240V AC	251 x 30 x 16 mm
	<b>I-DRIVER-LT-60-24</b> 8031414896202		
	LT Driver tensione costante Output 24VDC 2.5A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 2.5A 60W Input 220 ~ 240V AC	305 x 30 x 18,2 mm
	<b>I-DRIVER-LT-100-24</b> 8031414896226		
	LT Driver tensione costante Output 24VDC 4.17A 100W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 4.17A 100W Input 220 ~ 240V AC	312 x 30 x 18,2 mm
	<b>I-DRIVER-LT-200-24</b> 8031414896240		
	LT Driver tensione costante Output 24VDC 8.34A 200W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 8.34A 200W Input 220 ~ 240V AC	335 x 30 x 21,6 mm
	<b>I-DRIVER-LT-60-48</b> 8031414896219		
	LT Driver tensione costante Output 48VDC 1.25A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 1.25A 60W Input 220 ~ 240V AC	305 x 30 x 18,2 mm
	<b>I-DRIVER-LT-150-48</b> 8031414896233		
	LT Driver tensione costante Output 48VDC 3.125A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 3.125A 150W Input 220 ~ 240V AC	335 x 30 x 21,6 mm

## ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 12V /  
Costant voltage power supply LRS and RSP 12V



**STRIP-DRIVER12V-35W**  
8031440360265

Output 12V 3A 36W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



**STRIP-DRIVER12V-50W**  
8031414866779

Output 12V 4.2A 50W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



**STRIP-DRIVER12V-75W**  
8031439581268

Output 12V 6A 72W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 97 × 30 mm



**STRIP-DRIVER12V-100W**  
8031440359368

Output 12V 8.5A 102W  
Input 85 ~ 264VAC 120 ~ 373VDC

129 × 97 × 30 mm



**STRIP-DRIVER12V-150W**  
8031439611262

Output 12V 12.5A 150W  
Input 85 ~ 132VAC / 170 ~ 264VAC  
by switch  
240 ~ 370VDC (switch on 230VAC)

159 × 97 × 30 mm



**STRIP-DRIVER12V-200W**  
8031440359375

Output 12V 16.7A 200W  
Input 85 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



**STRIP-DRIVER12V-320W**  
8031440359344

Output 12V 26.7A 320W  
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm

## ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 24V /  
Costant voltage power supply LRS and RSP 24V



**STRIP-DRIVER24V-35W**  
8031414870943

Output 24V 1.5A 36W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



**STRIP-DRIVER24V-50W**  
8031440364744

Output 24V 2.2A 52W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



**STRIP-DRIVER24V-75W**  
8031414870950

Output 24V 3.2A 76W  
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 97 × 30 mm



**STRIP-DRIVER24V-100W**  
8031440364751

Output 24V 4.5A 108W  
Input 85 ~ 264VAC 120 ~ 373VDC

129 × 97 × 30 mm



**STRIP-DRIVER24V-150W**  
8031414870967

Output 24V 6.5A 156W  
Input 85 ~ 132VAC / 170 ~ 264VAC  
by switch  
240 ~ 370VDC (switch on 230VAC)

159 × 97 × 30 mm



**STRIP-DRIVER24V-200W**  
8031440364737

Output 24V 8.4A 201W  
Input 85 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm




**STRIP-DRIVER24V-320W**  
8031414864959

Output 24V 13.4A 321W  
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



## ALIMENTATORI POWER SUPPLY

		<b>I-DRIVER-UHP-200-24</b> 8031414896387 Output 24V 8.4A 200W Input 90 ~ 264VAC 127 ~ 370VDC	194 × 55 × 26 mm
Alimentatori tensione costante UHP 24V / Costant voltage power supply UHP 24V		<b>I-DRIVER-UHP-350-24</b> 8031414879618 Output 24V 14.6A 350W Input 90 ~ 264VAC 127 ~ 370VDC	220 × 62 × 31 mm
	senza ventola / without fan		
		<b>I-DRIVER-UHP-500-24</b> 8031414879625 Output 24V 20.9A 501W Input 90 ~ 264VAC 127 ~ 370VDC	220 × 62 × 31 mm
	senza ventola / without fan		
Alimentatori tensione costante RSP 36V / Costant voltage power supply RSP 36V		<b>STRIP-DRIVER36V-200W</b> 8031414870974 Output 36V 5.56A 200W Input 88 ~ 264VAC 124 ~ 370VDC	215 × 115 × 30 mm
		<b>STRIP-DRIVER36V-320W</b> 8031414864829 Output 36V 8.9A 320W Input 88 ~ 264VAC 124 ~ 370VDC	215 × 115 × 30 mm
Alimentatori tensione costante RSP 48V / Costant voltage power supply RSP 48V		<b>STRIP-DRIVER48V-75W</b> 8031414881536 Output 48V 1.6A 76,8W Input 88 ~ 264VAC 124 ~ 370VDC	99 × 97 × 30 mm
		<b>STRIP-DRIVER48V-150W</b> 8031414881529 Output 48V 3.3A 158,4W Input 85 ~ 132VAC 240 ~ 370VDC	159 × 97 × 30 mm
		<b>STRIP-DRIVER48V-200W</b> 8031414878307 Output 48V 4.2A 201W Input 88 ~ 264VAC 124 ~ 370VDC	215 × 115 × 30 mm
		<b>STRIP-DRIVER48V-320W</b> 8031414878314 Output 48V 4.2A 201W Input 88 ~ 264VAC 124 ~ 370VDC	215 × 115 × 30 mm

## DRIVER

Driver LPHC LPH and LCM		<b>I-DRIVER/18W-24V</b> 8031414875351 LPH Output 24V 0.75A 18W Input 180 ~ 264VAC 254 ~ 370VDC		140 × 30 × 22 mm
		<b>I-DRIVER/18W</b> 8031439571269 LPHC Output 6~48V 350mA 16,8W Input 180 ~ 264VAC		140 × 30 × 22 mm
		<b>I-DRIVER-DIMM-LCM25</b> 8031414924653 LCM dimmable 42W Output DC 0~54V 350mA; 6~50V 500mA; 6~42V 600mA; 6~36V 700mA; 6~28V 900mA; 6~24V 1050mA Input 180 ~ 277VAC 254~392VDC		105 × 68 × 23 mm
		<b>I-DRIVER-DIMM-LCM40</b> 8031439591267 LCM dimmable 42W Output DC 2~100V 350mA; 2~80V 500mA; 2~67V 600mA; 2~57V 700mA; 2~45V 900mA; 2~40V 1050mA Input 180 ~ 295VAC 254~417VDC		123,5 × 81,5 × 23 mm
		<b>I-DRIVER-DIMM-LCM60</b> 8031439561260 LCM dimmable 60W Output DC 2~90V 500mA; 2~90V 600mA; 2~86V 700mA; 2~67V 900mA; 2~57V 1050mA; 2~42V 1400mA Input 180 ~ 295VAC 254~417VDC		123,5 × 81,5 × 23 mm
		<b>I-DRIVER-DIMM-LCM25DA</b>  8031414924660 LCM dimmable 42W Output DC 0~54V 350mA; 6~50V 500mA; 6~42V 600mA; 6~36V 700mA; 6~28V 900mA; 6~24V 1050mA Input 180 ~ 277VAC 254~380VDC(254~375VDC for DA2-Type)		105 × 68 × 23 mm
		<b>I-DRIVER-DIMM-LCM40DA</b>  8031414924677 LCM dimmable 42W Output DC 2~100V 350mA; 2~80V 500mA; 2~67V 600mA; 2~57V 700mA; 2~45V 900mA; 2~40V 1050mA Input 180 ~ 295VAC 254 ~ 392VDC		123,5 × 81,5 × 23 mm
		<b>I-DRIVER-DIMM-LCM60DA</b>  8031414924684 LCM dimmable 60W Output DC 2~90V 500mA; 2~90V 600mA; 2~86V 700mA; 2~67V 900mA; 2~57V 1050mA; 2~42V 1400mA Input 180 ~ 295VAC 254 ~ 392VDC		123,5 × 81,5 × 23 mm
Driver HLG IP67 12-24V		<b>I-DRIVER-HLG-320-12</b> 8031440360258 Output 12V 22A 264W Input 90 ~ 305VAC 127 ~ 431VDC		252 × 90 × 43,8 mm

## DRIVER

### Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 / Dimmable driver ELG 24V IP67 and LPV 24V IP67

	<b>I-DRIVER-ELG-100-24</b> 8031414876914		199 × 63 × 35,5 mm
	ELG Dimmable Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC continue 320VAC for 24Hrs; 360VAC for 1Hr		
	<b>I-DRIVER-ELG-100-24DA</b> 8031414876921	 	199 × 63 × 35,5 mm
	ELG Dimmable DALI Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC continue 320VAC for 24Hrs; 360VAC for 1Hr		
	<b>I-DRIVER-ELG-150-24</b> 8031414876891		219 × 63 × 35,5 mm
	ELG Dimmable Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-ELG-150-24DA</b> 8031414876907	 	219 × 63 × 35,5 mm
	ELG Dimmable DALI Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-ELG-240-24</b> 8031414876877		244 × 71 × 37,5 mm
	ELG Dimmable Output 24V 10A 240W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-ELG-240-24DA</b> 8031414876884	 	244 × 71 × 37,5 mm
	ELG Dimmable DALI Output 24V 10A 240W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-LPV-60-24</b> 8031414876839		162,5 × 42,5 × 32 mm
	LPV Output 24V 2.5A 60W Input 90 ~ 264VAC 127 ~ 370VDC		
	<b>I-DRIVER-LPV-100-24</b> 8031414876853		190 × 52 × 37 mm
	LPV Output 24V 4.2A 100W Input 90 ~ 264VAC 127 ~ 370VDC		
	<b>I-DRIVER-LPV-150-24</b> 8031414876860		191 × 63 × 37,5 mm
	LPV Output 24V 6.3A 150W Input 180 ~ 305VAC 254 ~ 431VDC		













## DRIVER

### Driver XLG 24V IP67

	<b>I-DRIVER-XLG-75-24</b> 8031414873708		140 × 63 × 32 mm
	Output 24V 3.1A 75W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-XLG-100-24</b> 8031414879595		140 × 63 × 32 mm
	Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-XLG-150-24</b> 8031414879601		180 × 63 × 35,5 mm
	Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC		
	<b>I-DRIVER-XLG-200-24</b> 8031414879588		199 × 63 × 35,5 mm
	Output 24V 8.3A 200W Input 100 ~ 305VAC 142 ~ 431VDC		




## DRIVER

### Driver PWM DALI2

	<b>I-DRIVER-PWM-60-24DA</b> 8031414896356	 	150 × 53 × 35 mm
	Output 24V 2.5A 60W Input 90 ~ 305VAC 127 ~ 431VDC DALI2		
	<b>I-DRIVER-PWM-120-24DA</b> 8031414896363	 	191 × 63 × 37,5 mm
	Output 24V 5A 120W Input 90 ~ 305VAC 127 ~ 431VDC DALI2		
	<b>I-DRIVER-PWM-200-24DA</b> 8031414896370	 	195 × 68 × 39,5 mm
	Output 24V 8.3A 200W Input 100 ~ 305VAC 142 ~ 431VDC DALI2		





## DRIVER

### Guida DIN a forma di gradino ultra sottile / Ultra Slim Step Shape DIN Rail

	<b>I-DRIVER-HDR-60-24</b> 8031414896271 Output 24V 2.5A 60W Input 85 ~ 264VAC (277VAC operational) 120 ~ 370VDC (390VAC operational)	52,5 × 90 × 54,5 mm
	<b>I-DRIVER-HDR-100-24</b> 8031414896288 Output 24V 3.83A 100W Input 85 ~ 264VAC (277VAC operational) 120 ~ 370VDC (390VAC operational)	70 × 90 × 54,5 mm
	<b>I-DRIVER-HDR-150-24</b> 8031414896295 Output 24V 6.25A 150W Input 85 ~ 264VAC (277VAC operational) 120 ~ 370VDC (390VAC operational)	105 × 90 × 54,5 mm


## DRIVER

### Guida DIN industriale a uscita singola / Single Output Industrial DIN RAIL




	<b>I-DRIVER-NDR-240-24</b> 8031414896301 Output 24V 10A 240W Input 90 ~ 264VAC 127 ~ 370VDC	63 × 125,2 × 113,5 mm
	<b>I-DRIVER-NDR-480-24</b> 8031414896325 Output 24V 20A 480W Input 90 ~ 264VAC 127 ~ 370VDC	85,5 × 125,2 × 128,5 mm
	<b>I-DRIVER-NDR-240-48</b> 8031414896318 Output 48V 5A 240W Input 90 ~ 264VAC 127 ~ 370VDC	63 × 125,2 × 113,5 mm
	<b>I-DRIVER-NDR-480-48</b> 8031414896332 Output 48V 10A 480W Input 90 ~ 264VAC 127 ~ 370VDC	85,5 × 125,2 × 128,5 mm

## DRIVER

### Guida DIN industriale a uscita singola con funzione PFC / Single Output Industrial DIN RAIL with PFC Function

	<b>I-DRIVER-SDR-960-24</b> 8031414896349 Output 24V 40A 960W Input 180 ~ 264VAC 254 ~ 370VDC	110 × 125,2 × 150 mm
---	---	----------------------

## DIMMER















	<b>I-DIMMER-D1-10</b> 8031414877959 D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	22,5 × 22,5 × 48,6 mm
	<b>I-DIMMER-D1-10S</b> 8031414896257 D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	83,5 × 83,5 × 44 mm
	<b>I-DIMMER-D350S</b> 8031414896264 Dimmer a taglio di fase 220~240VAC 10~350W 1.5A	Trailing edge dimmer 220~240VAC 10~350W 1.5A	83,5 × 83,5 × 44 mm

## DRIVER


### Driver emergenza / Emergency driver

	<b>I-DRIVER-EMERGENCY</b> 8031414864751 Driver di emergenza 6-60V 400-40mA 4W 180Min Batteria 3,6V 3.0Ah Ni-Cd	Emergency driver 6-60V 400-40mA 4W 180Min Batteria 3,6V 3.0Ah Ni-Cd	160 × 38 × 28 mm
	<b>I-DRIVER-HELP</b> 8031414862559 Driver di emergenza Output Voltage 10-120V Input Voltage 85-265V 3-40W. emergenza 120 min. 18650 Li-Ion Battery 3,7V 2.4Ah	Emergency driver Output Voltage 10-120V Input Voltage 85-265V 3-40W. emergency 120 min. 18650 Li-Ion Battery 3,7V 2.4Ah	131 × 55 × 21 mm
	<b>I-DRIVER-HELP-HV</b> 8031414882595 Emergency output voltage 230V AC, adatto per: 2,5W emergency power 3 hours emergency time 3,5W emergency power 2 hours emergency time 5W emergency power 1,5 hours emergency time Battery 18650 LiFePO4 6.4V 1500mAh	Emergency output voltage 230V AC, suitable for: 2,5W emergency power 3 hours emergency time 3,5W emergency power 2 hours emergency time 5W emergency power 1,5 hours emergency time Battery 18650 LiFePO4 6.4V 1500mAh	160 × 38 × 28 mm

## DRIVER

	<b>I-DRIVER-60-24</b> 8031414897797 Output 24V 2.5A 60W Input 176 ~ 264VAC 176~370VDC		178 × 53 × 23 mm
	<b>I-DRIVER-60-24-IP67</b> 8031414897841 Output 24V 2.5A 60W Input 176 ~ 264VAC	 IP67	160 × 50 × 31 mm
	<b>I-DRIVER-100-24</b> 8031414897803 Output 24V 4.1A 100W Input 176 ~ 264VAC 250 ~ 360VDC		188 × 53 × 23 mm
	<b>I-DRIVER-100-24-IP67</b> 8031414897858 Output 24V 4.2A 100W Input 176 ~ 264VAC	 IP67	220 × 50 × 31 mm
	<b>I-DRIVER-150-24</b> 8031414897810 Output 24V 6.3A 150W Input 175 ~ 264VAC 176 ~ 370VDC		220 × 53 × 23 mm
	<b>I-DRIVER-150-24-IP67</b> 8031414897865 Output 24V 6.25A 150W Input 176 ~ 264VAC	 IP67	230 × 65 × 21 mm
	<b>I-DRIVER-200-24</b> 8031414897827 Output 24V 8.3A 200W Input 175 ~ 264VAC 175 ~ 370VDC		274 × 53 × 23 mm
	<b>I-DRIVER-200-24-IP67</b> 8031414897872 Output 24V 8.3A 200W Input 175 ~ 264VAC	 IP67	230 × 65 × 31 mm
	<b>I-DRIVER-300-24</b> 8031414897834 Output 22-24V 11.5A 300W Input 175 ~ 264VAC 175 ~ 370VDC		230 × 65 × 31 mm
	<b>I-DRIVER-DELO42</b> 8031414897667 Output 6-38/40/42 VDC 0.45-1.10A 42W Input 220 ~ 240VAC DALI2 PUSH DIM		103 × 68,5 × 30,5 mm

## DIMMER











	<b>STRIP-SOUND</b> 8031434531213 Ricevitore musicale + telecomando RGB 12V per strip LED	Musical control receiver RGB 12V for strip LED + remote control	50 × 70 × 20 mm
---	---	---	-----------------

## ADATTATORI POWER SUPPLY












Adattatore tensione costante /  
Costant voltage power supply

	<b>STRIP-ADAT-12W</b> 8031433141208 12V 12W - Spina CEE 7/16 IP20 Output 12V 1A Input 110-240V 0,5A IP20 - CLASSE 2		38 × 67 × 42 mm cavo/cable 1500 mm
	<b>STRIP-ADAT-24W</b> 8031433251204 12V 24W - Spina CEE 7/16 IP20 Output 12V 2A Input 110-240V 0,6A IP20 - CLASSE 2		38 × 80 × 50 mm cavo/cable 1500 mm
	<b>STRIP-ADAT-36W</b> 8031436601235 LED 12V 36W - Spina CEE 7/16 IP20 Output 12V 3A Input 110-240V 0,6A IP20 - CLASSE 2		35 × 100 × 50 mm cavo/cable 1500 mm





## REMOTE CONTROL

	<b>RF-WALLPAD-1CH</b> 8031414876426	Wallpad RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non incluse	RF 2.4G wallpad dimming light 4 zone 1 channel 2xAAA not included	86 × 86 × 36,5 mm	
	<b>RF-WALLPAD-2CH</b> 8031414876433	Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non incluse	RF 2.4G wallpad CCT adjustable white 4 zone 2 channels 2xAAA not included	86 × 86 × 36,5 mm	
	<b>RF-WALLPAD-5CH</b> 8031414876440	Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non incluse	RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included	86 × 86 × 36,5 mm	 
	<b>RF-DMXPAD-1CH</b> 8031414876457	Wallpad RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 230V collegabile con protocollo DMX 512	RF 2.4G wallpad dimming light 4 zone 1 channel 230V linkable with DMX512 protocol	120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box	
	<b>RF-DMXPAD-2CH</b> 8031414876464	Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 230V collegabile con protocollo DMX 512	RF 2.4G wallpad CCT adjustable white 4 zone 2 channels 230V collegabile con protocollo DMX 512	120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box	
	<b>RF-DMXPAD-5CH</b> 8031414876471	Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 230V collegabile con protocollo DMX 512	RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 230V collegabile con protocollo DMX 512	120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box	 

## REMOTE CONTROL

	<b>RF-COM-1CH</b> 8031414876402	Radiocomando RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non incluse	RF 2.4G remote control dimming light 4 zone 1 channel 2xAAA not included	
	<b>RF-COM-2CH</b> 8031414876396	Radiocomando RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non incluse	RF 2.4G remote control CCT adjustable white 4 zone 2 channels 2xAAA not included	
	<b>RF-COM-5CH</b> 8031414876419	Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non incluse	RF 2.4G remote control CCT adjustable white 4 zone 2 channels 2xAAA not included	 
	<b>RF-COM-5CH-1ZN</b> 8031414897919	Controllo RGB+CCT 1 zone Batteria CR2032	RGB+CCT Remote Control 1 zone Battery CR2032	
	<b>RF-COM-1CH-1ZN</b> 8031414897896	Controllo luminosità 1 zone Batteria CR2032	Brightness Remote Control 1 zone Battery CR2032	
	<b>RF-COM-2CH-1ZN</b> 8031414897902	Controllo CCT 1 zone Batteria CR2032	CCT Remote Control 1 zone Battery CR2032	
	<b>RF-COM-5CH-8ZN</b> 8031414897926	Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 8 zone	8 scene 2xAAA non incluse RF Remote Controller 8 zones 8 scenes Battery: 2xAAA not included	

## REMOTE CONTROL

	<b>RF-RICEVITORE-1CH</b> 8031414897933 Ricevitore RF 2.4G 1 canale per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE Input 8.5A 12-24V Output 1CH 8A - 40W/96W/192W/288W	RF 2.4G receiver box 2 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR Input 8.5A 12-24V Output 1CH 8A - 40W/96W/192W/288W	97 × 33 × 18 mm	
	<b>RF-RICEVITORE-2CH</b> 8031414876488 Ricevitore RF 2.4G 2 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT Input 10.5A 12-24V Output 2CH;5A/CH - 2x(60-120)W	RF 2.4G receiver box 2 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/CCT Input 10.5A 12-24V Output 2CH;5A/CH - 2x(60-120)W	97 × 33 × 18 mm	
	<b>RF-RICEVITORE-5CH</b> 8031414876495 Ricevitore RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	F 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	114 × 38 × 20 mm	
	<b>RF-RICEVITORE-5CH-PRO</b> 8031414882724 Ricevitore RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 30.5A 12-48V Output 5CH;6A/CH 12/24V 5 x (72-144)W 5CH;4A/CH 36/48V - 5x(144-192)W	RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/CCT/RGB/RGBW/RGB+CCT Input 30.5A 12-48V Output 5CH;6A/CH 12/24V 5x(72-144)W 5CH;4A/CH 36/48V - 5x(144-192)W	179 × 56 × 30 mm	
	<b>RF-RICEVITORE-4CH-IP67</b> 8031414882717 Ricevitore RF 2.4G 4 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/RGB/RGBW Input 20.5A 12-36V Output 4CH;5A/CH - 4x(60-180)W	RF 2.4G receiver box 4 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/RGB/RGBW Input 20.5A 12-36V Output 4CH;5A/CH - 4x(60-180)W	 IP67	176 × 78 × 38 mm

## REMOTE CONTROL

	<b>RF-WIFI-CONTROL-5CH</b> 8031414878710 Ricevitore Wi-Fi + RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	Wi-Fi + RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	114 × 38 × 20 mm	
	<b>RF-BT-CONTROL-5CH</b> 8031414878826 Ricevitore Bluetooth + RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	Bluetooth + RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W	114 × 38 × 20 mm	
	<b>RF-AMPLIFICATORE-5CH</b> 8031414882700 Amplificatore 5 canali Input 25.5A 12-24VDC Output 5CH;5A/ CH 12/24V - 5x(60-120)W	5 Channel amplifier Input 25.5A 12-24VDC Output 5CH;5A/ CH 12/24V - 5x(60-120)W	107 × 75 × 24,5 mm	
	<b>RF-AMPLIFICATORE-2CH</b> 8031414882694 Amplificatore 2 canali Input 16.5A 12-36VDC Output 2CH;8A/ CH 12/36V - 2x(96-288)W	2 Channel amplifier Input 16.5A 12-36VDC Output 2CH;8A/ CH 12/36V - 2x(96-288)W	175 × 45 × 27 mm	
	<b>RF-RIPETITORE</b> 8031414882731 Ripetitore di segnale RF 2.4G AC100-240V DC12-24V	RF 2.4G signal Repeater AC100-240V DC12-24V	52 × 52 × 26 mm	

## SPI CONTROLLER



### LED-FORREST-SPI 8031414927319

Controller per strip led  
Pixel to Pixel effetto "RUN".

Avvio Show e spegnimento  
tramite pulsante N/O.

Compatibile con strip led Pixel to  
Pixel SPI WS2811 o altri protocolli.

Lunghezza strip, direzione e  
velocità programmabile  
tramite APP NewlabForrest.

Uscita di sincronia per  
effetti di rincorsa multipli.

Pixel to Pixel LED strip  
controller with "RUN" effect.

Show start and turn off via N/O button.

Compatible with Pixel to Pixel  
SPI WS2811 LED strips or other protocols.

Strip length, direction and  
speed programmable via  
NewlabForrest APP.

Synchronization output for  
multiple chasing effects.

## SPI CONTROLLER



### RF-CONTROL-SPI 8031414927340

5-24VDC; 8A  
Input signal: RF2.4G;  
work with R9 remote;  
Output signal: SPI (TTL)  
Control dots: 1024  
Dynamic mode:  
32 kinds color light, 8 kinds white light  
Compatible with  
49 kinds of Driving Ics

Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, SM16714(RGBW), UCS2603, UCS5603, SM16714D, SM16703P, UCS7604(RGBW), UCS7804(RGBW).

97 × 33 × 18 mm



### RF-WIFI-CONTROL-SPI 8031414927333

5-24VDC; 8A  
Input signal: Tuya APP + RF 2.4GHz;  
Output signal: SPI(TTL) x 2  
Control dots: Max.1000  
Rich dynamic effects,  
Multiple music rhythms,  
Wireless remote control  
Compatible with 49 kinds  
of RGB or RGBW LED strips

114 × 38 × 20 mm



### RF-DMX-DECODER-SPI 8031414927357

5-24VDC  
Input signal: DMX512/RDM+RF 2.4G;  
Output signal: pixel signal  
Control dots: 170 pixels (RGB 510 CH);  
Max 900pixels  
Compatible with 37 kinds of Driving  
ICs; Numeric display  
Reverse Polarity Protection

Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), SM16714(RGBW), SM16703P, SM16714D, WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, UCS5603, UCS2603.

170 × 50 × 23 mm



### RF-PIR-CONTROL-SPI 8031414927326

Input voltage: 5-24VDC;  
Output type: 2\*SPI(TTL),  
Input type: PIR sensor + Push button  
Pixel number: Max 960  
Comes with 2 PIR Sensors(ER-C),  
1 daylight sensor and 2 PIR sensor  
extension line(5m)  
Compatible with 28 kinds driving ICs

Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206, GS8208, LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.

186 × 86 × 25 mm




### RF-CONTROL-32CH-SPI 8031414927364

Input voltage: 5-24VDC;  
Output voltage: 32 x (5-24)VDC;  
32CH, 1A/CH; 32 x (5-24)W  
Output type:  
Constant voltage + SPI(TTL)  
Reverse Polarity Protection  
Comes with 2 PIR Sensors(ER-C)  
and 1 daylight sensor,  
2 PIR sensor extension line(5m)

Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206, GS8208, LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.

186 × 86 × 25 mm

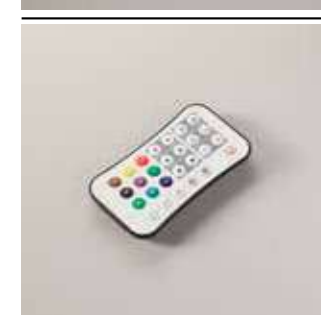

### RF-COM-SPI 8031414927371

RGB/RGBW RF Remote Controller  
1 zone  
Battery: CR2032

58,5 × 9 × 107 mm

## SENSORI SENSORS

### Sensori industriali di movimento / Industrial motion sensors




#### LED-SENSOR-HB 8031414879731

Load capacity  
400W  
220V - 240V

#### Accessori inclusi / Included accessories



1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.



#### LED-SENSOR-TP 8031414879724

Load capacity  
no limitation  
220V - 240V

IP65

1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.



#### LED-SENSOR-REMOTE 8031414879717

Radiocomando per sensori industriali. Industrial sensor remote control.

## SENSORI SENSORS

### Sensori adattabili a qualsiasi prodotto di Illuminotecnico / Sensors compatible for any lighting products




#### I-SENSORE-360 8031435901237

IP44

Sensore PIR 230V  
max 1600W 360°  
distanza massima 5m.  
time 10 sec. - 4 min.  
lux 2 - 2000

PIR sensor 230V  
max 1600W 360°  
max 5m.  
time 10 sec. - 4 min.  
lux 2 - 2000




#### I-SENSORE-130 8031434401219

IP44

Sensore PIR 230V  
max 1000W 130°  
distanza massima 12m.  
time 10 sec. - 4 min.  
lux 2 - 2000  
base accessoria angolare



PIR sensor 230V  
max 1000W 130°  
max 12m.  
time 10 sec. - 4 min.  
lux 2 - 2000  
corner accessory base















## CLAY

Prodotti in porcellana e cavi elettrici a treccia / Porcelain products and braid cables

	<b>I-CLAY-SCADER</b> 8031414865031 Scatola di derivazione elettrica CLAY in porcellana bianca	White porcelain external junction box CLAY	Ø 80 x H 45 mm
	<b>I-CLAY-INTERRUTTORE</b> 8031414865048 Interruttore rotativo CLAY in porcellana bianca 10A AC230V 50Hz	White porcelain rotating switch CLAY 10A AC230V 50Hz	Ø 65 x H 60 mm
	<b>I-CLAY-PRESA</b> 8031414865055 Presca elettrica CLAY polivalente in porcellana bianca 10/16A AC230V 50Hz	White porcelain universal socket CLAY 10/16A AC230V 50Hz	Ø 65 x H 37 mm
	<b>I-CLAY-PRESA-F</b> 8031414865062 Presca elettrica Schuko CLAY in porcellana bianca	White porcelaine Schuko socket CLAY	Ø 65 x H 50 mm
	<b>I-CLAY-E27</b> 8031414871117 Portalampada CLAY in porcellana bianca E27 AC230V 50Hz	White porcelaine E27 lamp-holder AC230V 50Hz	Ø 45 x H 60 mm
	<b>I-CLAY-E14</b> 8031414870929 Portalampada CLAY in porcellana bianca E14 AC230V 50Hz	White porcelaine E14 lamp-holder AC230V 50Hz	Ø 35 - H 60 mm
	<b>I-CLAY-BASE</b> 8031414870936 Rosone in porcellana bianca	White porcelain canopy	Ø 105 x H 30 mm
	<b>I-CLAY-ISOLATORI</b> 8031414865079 Kit 4 pz isolatori CLAY in porcellana bianca	White porcelain pulleys CLAY set 4 pcs	Ø 18 x H 20 mm

## CLAY

Prodotti in porcellana e cavi elettrici a treccia / Porcelain products and braid cables

	<b>I-CLAY-CAVO-BCO</b> 8031414865086 Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	5 m 3 x 0,75 mm
	<b>I-CLAY-CAVO-2P-BCO</b> 8031414865277 Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	5 m 2 x 0,75 mm
	<b>I-CLAY-CAVO-R25 BCO</b> 8031414871162 Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	25 m 2 x 0,75 mm
	<b>I-CLAY-CAVO-ORO</b> 8031414865093 Cavo elettrico CLAY trecciato con rivestimento tessile in oro	Gold twisted fabric wire CLAY	5 m 3 x 0,75 mm
	<b>I-CLAY-CAVO-2P-ORO</b> 8031414865284 Cavo elettrico CLAY trecciato con rivestimento tessile oro	Gold twisted fabric wire CLAY	5 m 2 x 0,75 mm
	<b>I-CLAY-CAVO-R25 ORO</b> 8031414871131 Cavo elettrico CLAY trecciato con rivestimento tessile oro	Gold twisted fabric wire CLAY	25 m 2 x 0,75 mm
	<b>I-CLAY-CAVO-R25 MAR</b> 8031414871148 Cavo elettrico CLAY trecciato con rivestimento tessile marrone	Brown twisted fabric wire CLAY	25 m 3 x 0,75 mm
	<b>I-CLAY-CAVO3X1,5 BCO</b> 8031414877980 Cavo elettrico CLAY trecciato con rivestimento tessile bianco	White twisted fabric wire CLAY	25 m 3 x 1,5 mm
	<b>I-CLAY-CAVO3X1,5 MAR</b> 8031414878000 Cavo elettrico CLAY trecciato con rivestimento tessile in marrone	Brown twisted fabric wire CLAY	25 m 3 x 1,5 mm
	<b>I-CLAY-CAVO3X1,5 ORO</b> 8031414877997 Cavo elettrico CLAY trecciato con rivestimento tessile in oro	Gold twisted fabric wire CLAY	25 m 3 x 1,5 mm

## PORTALAMPADE LAMP HOLDERS

Accessori / Accessories









	<b>I-PORTALAMPADE-E14-L</b> 8031440354592 Portalampada E14 con copertura liscia in PET	E14 lamp holder with smooth PET cover
	<b>I-PORTALAMPADE-E14-S</b> 8031440354578 Portalampada E14 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring
	<b>I-PORTALAMPADE-E14-T</b> 8031440354585 Portalampada E14 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded
	<b>I-PORTALAMPADE-E27-L</b> 8031440354554 Portalampada E27 con copertura liscia in PET	E27 lamp holder with smooth PET cover
	<b>I-PORTALAMPADE-E27-P</b> 8031440354561 Portalampada E27 in PBT	E27 lamp holder in PBT
	<b>I-PORTALAMPADE-E27-S</b> <b>8031440354530</b> Portalampada E27 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring
	<b>I-PORTALAMPADE-E27-T</b> 8031440354547 Portalampada E27 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded
	<b>I-PORTALAMPADE-GU10</b> 8031435751221 Portalampada GU10 in PBT con cavo di 12 cm	GU10 lamp holder in PBT with 12 cm cable

## PORTALAMPADE LAMP HOLDERS

Accessori / Accessories

	<b>I-PORTALAMPADE-MR16</b> 8031439761264 Portalampada MR16 in PBT con cavo di 10 cm	Lamp holder MR16 in PBT with 10 cm cable
	<b>I-PORTALAMPADE-T8</b> 8031439851262 Portalampada T8 in PBT fissaggio a clip	Lamp holder T8 in PBT clip fixing
	<b>I-PORTALAMPADE-R7S</b> 8031414861491 Portalampada R7S 118 mm in PBT incluso filo da 15 cm	Lamp holder R7S 118 mm in PBT including 15 cm wire
	<b>I-PORTALAMPADE-G9</b> 8031414862962 Portalampada G9 in PBT con cavo di 10 cm	Lamp holder G9 in PBT with 10 cm cable
	<b>INC-MATRIX-KIT</b> 8031436551233 Kit molle e anello per faretto incasso GU10	Kit springs and ring for recessed spotlights GU10
	<b>CABLAGGIO</b> 8031414865499 Cabl. trip. cavo tondo bianco H05VV-F spina Italia 10A, 250V	White round cable harness H05VV-F plug Italy 10A, 250V 2,5 m 3 x 0,75 mm

## ADATTATORI LAMPHOLDER ADAPTERS

	<b>ADATTATORE-E14-E27</b> 8031439351267 Adattatore da E14 a E27 in PET	Lamp holder adapter from E14 to E27 in PET
	<b>ADATTATORE-E27-E14</b> 8031439391263 Adattatore da E27 a E14 in PET	Lamp holder adapter from E27 to E14 in PET
	<b>ADATTATORE-E27-2E27</b> 80314439371265 Adattatore da E27 a 2 E27 in PET	Lamp holder adapter from E27 to E27 in PET
	<b>ADATTATORE-E27-GU10</b> 8031436171233 Adattatore da E27 a GU10 in PET	Lamp holder adapter from E27 to GU10 in PET
	<b>ADATTATORE-E14-GU10</b> 8031439361266 Adattatore da E14 a GU10 in PET	Lamp holder adapter from E14 to GU10 in PET
	<b>ADATTATORE-GU10-E14</b> 8031439431266 Adattatore da GU10 a E14 in PET	Lamp holder adapter from GU10 to E14 in PET
	<b>ADATTATORE-GU10-E27</b> 8031439421267 Adattatore da GU10 a E27 in PET	Lamp holder adapter from GU10 to E27 in PET
	<b>ADATTATORE-G9-E27</b> 8031439411268 Adattatore da G9 a E27 in PET	Lamp holder adapter from G9 to E27 in PET


## ADATTATORI LAMPHOLDER ADAPTERS

	<b>ADATTATORE-G9-E14</b> 8031439401269 Adattatore da G9 a E14 in PET	Lamp holder adapter from G9 to E14 in PET
	<b>ADATTATORE-E27-E27</b> 8031439451264 Adattatore da E27 a E27 in PET con flessibile 20 cm in metallo	Lamp holder adapter from E27 to E27 in PET with 20 cm metal flexible tube
	<b>ADATTATORE-EUC-UKG</b> 8031414879809 Adattatore presa (EU) tipo C a presa (UK) tipo G	Adaptor (EU) C to (UK) G
	<b>ADATTATORE-EUF-UKG</b> 8031414879816 Adattatore (EU) F a (UK) G	Adaptor (EU) F to (UK) G
	<b>ADATTATORE-EU2-E27</b> 8031414922796 Emergency adapter	Emergency adapter



# SMART INTEC

## SMART HUB



**SMART-GATEWAY-BT**  
8031414878970

Interfaccia di collegamento dispositivi bluetooth con rete WIFI


Device connection interface bluetooth with WIFI network



## SMART PLUG



**SMART-IR**  
8031414878703

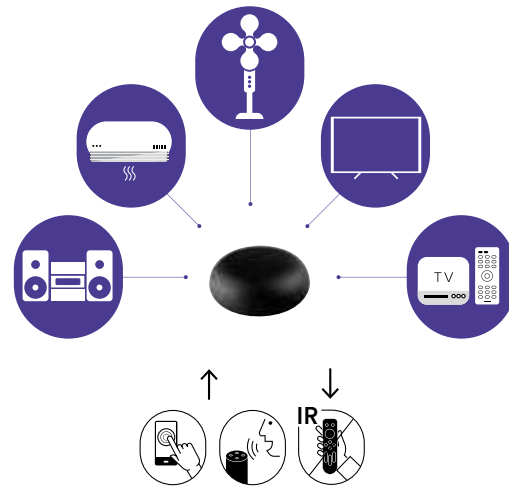

## SMART PLUG



**SMART-POWER-SC4USB3**  
8031414879014

Adattatore multipresa WIFI  
4 Schuko 3 USB 1000-2400W 10A  
Input 100-240V  
WIFI 2.4GHZ

WIFI multi-socket adapter  
4 Schuko 3 USB 1000-2400W 10A  
Input 100-240V  
2.4GHZ WIFI



**SMART-PRESA**  
8031414878987

Adattatore presa  
WIFI 230V 50HZ 16A  
Frequenza 2.4GHz

WIFI socket adapter  
230V 50HZ 16A  
2.4GHz frequency



## SMART CONTROLLER



**SMART-SWITCH-2**  
8031414879045

Controller WIFI 2.4GHZ  
per accensione e timer  
Interruttori 2 vie 230V max 10A

2.4GHZ WIFI Controller  
for ignition and timer  
2-way switches 230V max 10A



**SMART-SWITCH-1**  
8031414879038

Controller WIFI 2.4GHZ  
per accensione e timer  
Interruttori 1 via 230V max 10A

2.4GHZ WIFI Controller  
for ignition and timer  
1-way switches 230V max 10A



**SMART-START**  
8031414879021

Controller WIFI 2.4GHz  
per accensione e timer prodotti  
230V max 2200W/10A

2.4GHZ WIFI Controller  
for ignition and timer products  
230V max 2200W/10A



## SMART SENSOR



**SMART-SENSOR**  
8031414879007

Sensore infrarossi  
WIFI 2.4GHz

Infrared sensor  
WIFI 2.4GHz



**SMART-PORTER**  
8031414878994

Sensore porte e finestre  
WIFI 2.4GHz alimentato  
a batterie AAA1,5V2

Sensor for door and windows  
WIFI 2.4ghz battery  
powered AAA1,5V2





# INTEC<sup>®</sup>

LIGHT

faneurope

divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico

Agglomerato A.S.I

#### NAPOLI

Località Bosco Fangone  
80035 Nola (NA)

T +39 081 3151017  
T +39 081 8210771

info@faneurope.it  
www.faneurope.it

#### MILANO

Via Monzoro, 46  
20007 Cornaredo (MI)

T +39 02 84345083



Download Catalogue



SMART INTEC

Download App Smart Intec on:



SMART LIFE



concept  
**DITRE** IDEAS MAKERS

graphic artwork & photo editing  
**Ditre.com**

photo  
**Quasarfoto.com**  
**Ditre.com**  
**F.A.N. Europe photographic archive**

imagebank  
**shutterstock.com**  
**istockphoto.com**  
**unsplash.com**

styling  
**Cristina Romanello**  
**Laila Casellato**

credits  
**Infiniti Design**  
**Pointhouse**  
**Studio Menguante**  
**Paolo Loschi**  
**Gressoni**  
**Vbc ceramiche**

printed in Italy  
**Graficametelliana.com**  
April 2024

L'azienda si riserva il diritto  
di effettuare modifiche ai  
prodotti presenti in questo  
catalogo senza preavviso alcuno  
/

The company reserves  
the right to make changes  
to the products in this  
catalog without prior notice

**faneurope**<sup>®</sup>

